

Designation system

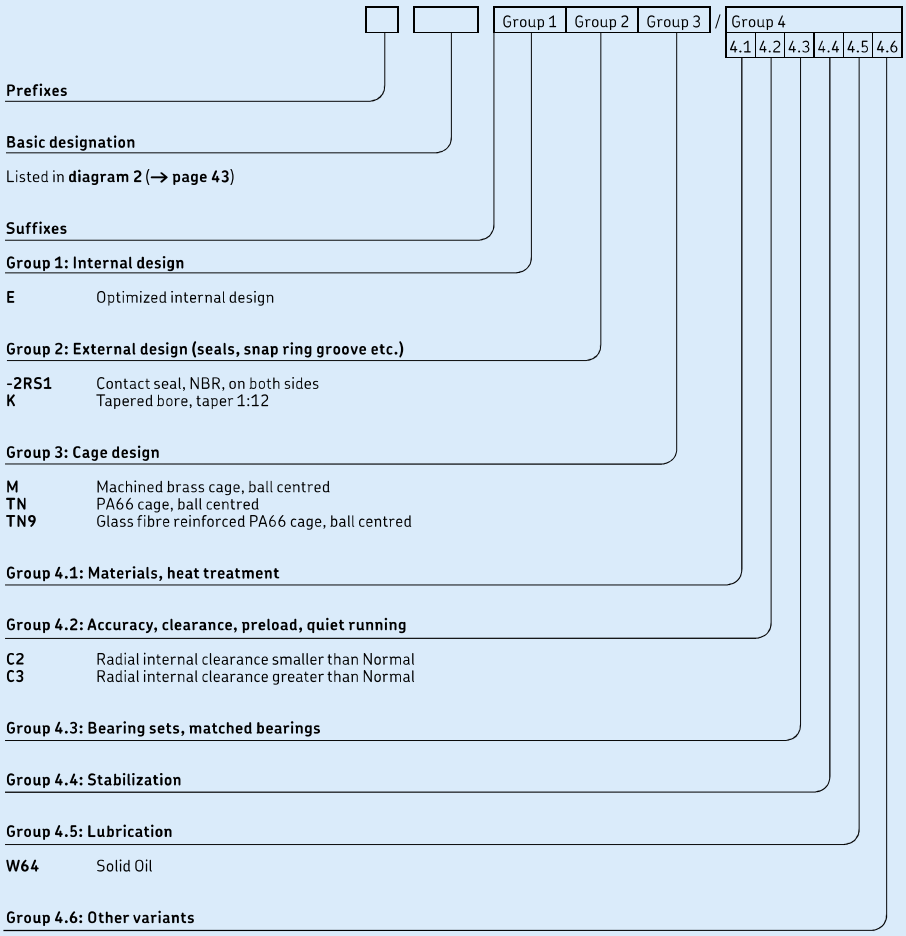


4

4.1 Self-aligning ball bearings
d **5 – 30** mm




Cylindrical bore




Tapered bore

Principal dimensions			Basic load ratings dynamic	static	Fatigue load limit	Speed ratings Reference speed	Limiting speed	Mass	Designations Bearing with cylindrical bore	tapered bore
d	D	B	C	C_0	P_u					
mm			kN		kN	r/min		kg	–	
5	19	6	2,51	0,48	0,025	63 000	45 000	0,009	**135 TN9**	–
6	19	6	2,51	0,48	0,025	70 000	45 000	0,009	**126 TN9**	–
7	22	7	2,65	0,56	0,029	63 000	40 000	0,014	**127 TN9**	–
8	22	7	2,65	0,56	0,029	60 000	40 000	0,014	**108 TN9**	–
9	26	8	3,9	0,82	0,043	60 000	38 000	0,022	**129 TN9**	–
10	30	9	5,53	1,18	0,061	56 000	36 000	0,034	**1200 ETN9**	–
	30	14	8,06	1,73	0,09	50 000	34 000	0,047	**2200 ETN9**	–
12	32	10	6,24	1,43	0,072	50 000	32 000	0,04	**1201 ETN9**	–
	32	14	8,52	1,9	0,098	45 000	30 000	0,053	**2201 ETN9**	–
	37	12	9,36	2,16	0,12	40 000	28 000	0,067	**1301 ETN9**	–
	37	17	11,7	2,7	0,14	38 000	28 000	0,095	**2301**	–
15	35	11	7,41	1,76	0,09	45 000	28 000	0,049	**1202 ETN9**	–
	35	14	8,71	2,04	0,11	38 000	26 000	0,06	**2202 ETN9**	–
	42	13	10,8	2,6	0,14	34 000	24 000	0,094	**1302 ETN9**	–
	42	17	11,9	2,9	0,15	32 000	24 000	0,12	**2302**	–
17	40	12	8,84	2,2	0,12	38 000	24 000	0,073	**1203 ETN9**	–
	40	16	10,6	2,55	0,14	34 000	24 000	0,088	**2203 ETN9**	–
	47	14	12,7	3,4	0,18	28 000	20 000	0,12	**1303 ETN9**	–
	47	19	14,3	3,55	0,19	30 000	22 000	0,16	**2303**	–
20	47	14	12,7	3,4	0,18	32 000	20 000	0,12	**1204 ETN9**	**1204 EKTN9**
	47	18	16,8	4,15	0,22	28 000	20 000	0,14	**2204 ETN9**	–
	52	15	14,3	4	0,21	26 000	18 000	0,16	**1304 ETN9**	–
	52	21	18,2	4,75	0,24	26 000	19 000	0,22	**2304 TN9**	–
25	52	15	14,3	4	0,21	28 000	18 000	0,14	**1205 ETN9**	**1205 EKTN9**
	52	18	16,8	4,4	0,23	26 000	18 000	0,16	**2205 ETN9**	**2205 EKTN9**
	62	17	19	5,4	0,28	22 000	15 000	0,26	**1305 ETN9**	**1305 EKTN9**
	62	24	27	7,1	0,37	22 000	16 000	0,34	**2305 ETN9**	**2305 EKTN9**
30	62	16	15,6	4,65	0,24	24 000	15 000	0,22	**1206 ETN9**	**1206 EKTN9**
	62	20	23,8	6,7	0,35	22 000	15 000	0,26	**2206 ETN9**	**2206 EKTN9**
	72	19	22,5	6,8	0,36	19 000	13 000	0,39	**1306 ETN9**	**1306 EKTN9**
	72	27	31,2	8,8	0,45	18 000	13 000	0,5	**2306**	**2306 K**




Dimensions				Abutment and fillet dimensions			Calculation factors				
d	d_2 ~	D_1 ~	$r_{1,2}$ min.	d_a min.	D_a max.	r_a max.	k_r	e	Y_1	Y_2	Y_0
mm				mm			–				
5	10,3	15,4	0,3	7,4	16,6	0,3	0,045	0,33	1,9	3	2
6	10,3	15,4	0,3	8,4	16,6	0,3	0,04	0,33	1,9	3	2
7	12,6	17,6	0,3	9,4	19,6	0,3	0,04	0,33	1,9	3	2
8	12,6	17,6	0,3	10,4	19,6	0,3	0,03	0,33	1,9	3	2
9	14,8	21,1	0,3	11,4	23,6	0,3	0,04	0,33	1,9	3	2
10	16,7	24,4	0,6	14,2	25,8	0,6	0,04	0,33	1,9	3	2
	15,3	24,3	0,6	14,2	25,8	0,6	0,045	0,54	1,15	1,8	1,3
12	18,2	26,4	0,6	16,2	27,8	0,6	0,04	0,33	1,9	3	2
	17,5	26,5	0,6	16,2	27,8	0,6	0,045	0,5	1,25	2	1,3
	20	30,8	1	17,6	31,4	1	0,04	0,35	1,8	2,8	1,8
	18,6	31	1	17,6	31,4	1	0,05	0,6	1,05	1,6	1,1
15	21,2	29,6	0,6	19,2	30,8	0,6	0,04	0,33	1,9	3	2
	20,9	30,2	0,6	19,2	30,8	0,6	0,045	0,43	1,5	2,3	1,6
	23,9	35,3	1	20,6	36,4	1	0,04	0,31	2	3,1	2,2
	23,2	35,2	1	20,6	36,4	1	0,05	0,52	1,2	1,9	1,3
17	24	33,6	0,6	21,2	35,8	0,6	0,04	0,31	2	3,1	2,2
	23,8	34,1	0,6	21,2	35,8	0,6	0,045	0,43	1,5	2,3	1,6
	28,9	41	1	22,6	41,4	1	0,04	0,3	2,1	3,3	2,2
	25,8	39,4	1	22,6	41,4	1	0,05	0,52	1,2	1,9	1,3
20	28,9	41	1	25,6	41,4	1	0,04	0,3	2,1	3,3	2,2
	27,4	41	1	25,6	41,4	1	0,045	0,4	1,6	2,4	1,6
	33,3	45,6	1,1	27	45	1	0,04	0,28	2,2	3,5	2,5
	28,8	43,7	1,1	27	45	1,1	0,05	0,52	1,2	1,9	1,3
25	33,3	45,6	1	30,6	46,4	1	0,04	0,28	2,2	3,5	2,5
	32,3	46,1	1	30,6	46,4	1	0,045	0,35	1,8	2,8	1,8
	37,8	52,5	1,1	32	55	1,1	0,04	0,28	2,2	3,5	2,5
	35,5	53,5	1,1	32	55	1,1	0,05	0,44	1,4	2,2	1,4
30	40,1	53	1	35,6	56,4	1	0,04	0,25	2,5	3,9	2,5
	38,8	55	1	35,6	56,4	1	0,045	0,33	1,9	3	2
	44,9	60,9	1,1	37	65	1,1	0,04	0,25	2,5	3,9	2,5
	41,7	60,9	1,1	37	65	1,1	0,05	0,44	1,4	2,2	1,4

4.1 Self-aligning ball bearings
d **35 – 70** mm




Cylindrical bore




Tapered bore

Principal dimensions			Basic load ratings dynamic	static	Fatigue load limit	Speed ratings Reference speed	Limiting speed	Mass	Designations Bearing with cylindrical bore	tapered bore
d	D	B	C	C_0	P_u					
mm			kN		kN	r/min		kg	–	
35	72	17	19	6	0,31	20 000	13 000	0,32	**1207 ETN9**	**1207 EKTN9**
	72	23	30,2	8,8	0,455	18 000	12 000	0,4	**2207 ETN9**	**2207 EKTN9**
	80	21	26,5	8,5	0,43	16 000	11 000	0,51	**1307 ETN9**	**1307 EKTN9**
	80	31	39,7	11,2	0,59	16 000	12 000	0,68	**2307 ETN9**	**2307 EKTN9**
40	80	18	19,9	6,95	0,36	18 000	11 000	0,42	**1208 ETN9**	**1208 EKTN9**
	80	23	31,9	10	0,51	16 000	11 000	0,51	**2208 ETN9**	**2208 EKTN9**
	90	23	33,8	11,2	0,57	14 000	9 500	0,68	**1308 ETN9**	**1308 EKTN9**
	90	33	54	16	0,82	14 000	10 000	0,93	**2308 ETN9**	**2308 EKTN9**
45	85	19	22,9	7,8	0,4	17 000	11 000	0,47	**1209 ETN9**	**1209 EKTN9**
	85	23	32,5	10,6	0,54	15 000	10 000	0,55	**2209 ETN9**	**2209 EKTN9**
	100	25	39	13,4	0,7	12 000	8 500	0,96	**1309 ETN9**	**1309 EKTN9**
	100	36	63,7	19,3	1	13 000	9 000	1,25	**2309 ETN9**	**2309 EKTN9**
50	90	20	26,5	9,15	0,48	16 000	10 000	0,53	**1210 ETN9**	**1210 EKTN9**
	90	23	33,8	11,2	0,57	14 000	9 500	0,6	**2210 ETN9**	**2210 EKTN9**
	110	27	43,6	14	0,72	12 000	8 000	1,2	**1310 ETN9**	**1310 EKTN9**
	110	40	63,7	20	1,04	14 000	9 500	1,65	**2310**	**2310 K**
55	100	21	27,6	10,6	0,54	14 000	9 000	0,71	**1211 ETN9**	**1211 EKTN9**
	100	25	39	13,4	0,7	12 000	8 500	0,81	**2211 ETN9**	**2211 EKTN9**
	120	29	50,7	18	0,92	11 000	7 500	1,6	**1311 ETN9**	**1311 EKTN9**
	120	43	76,1	24	1,25	11 000	7 500	2,1	**2311**	**2311 K**
60	110	22	31,2	12,2	0,62	12 000	8 500	0,9	**1212 ETN9**	**1212 EKTN9**
	110	28	48,8	17	0,88	11 000	8 000	1,1	**2212 ETN9**	**2212 EKTN9**
	130	31	58,5	22	1,12	9 000	6 300	1,95	**1312 ETN9**	**1312 EKTN9**
	130	46	87,1	28,5	1,46	9 500	7 000	2,6	**2312**	**2312 K**
65	120	23	35,1	14	0,72	11 000	7 000	1,15	**1213 ETN9**	**1213 EKTN9**
	120	31	57,2	20	1,02	10 000	7 000	1,45	**2213 ETN9**	**2213 EKTN9**
	140	33	65	25,5	1,25	8 500	6 000	2,45	**1313 ETN9**	**1313 EKTN9**
	140	48	95,6	32,5	1,66	9 000	6 300	3,25	**2313**	**2313 K**
70	125	24	35,8	14,6	0,75	11 000	7 000	1,25	**1214 ETN9**	–
	125	31	44,2	17	0,88	10 000	6 700	1,5	**2214**	–
	150	35	74,1	27,5	1,34	8 500	6 000	3	**1314**	–
	150	51	111	37,5	1,86	8 000	6 000	3,9	**2314**	–




Dimensions				Abutment and fillet dimensions			Calculation factors				
d	d_2 ~	D_1 ~	$r_{1,2}$ min.	d_a min.	D_a max.	r_a max.	k_r	e	Y_1	Y_2	Y_0
mm				mm			–				
35	47	62,3	1,1	42	65	1,1	0,04	0,23	2,7	4,2	2,8
	45,3	64,2	1,1	42	65	1,1	0,045	0,31	2	3,1	2,2
	51,5	69,5	1,5	44	71	1,5	0,04	0,25	2,5	3,9	2,5
	46,5	68,4	1,5	44	71	1,5	0,05	0,46	1,35	2,1	1,4
40	53,6	68,8	1,1	47	73	1,1	0,04	0,22	2,9	4,5	2,8
	52,4	71,6	1,1	47	73	1,1	0,045	0,28	2,2	3,5	2,5
	61,5	81,5	1,5	49	81	1,1	0,04	0,23	2,7	4,2	2,8
	53,7	79,2	1,5	49	81	1,5	0,05	0,4	1,6	2,4	1,6
45	57,5	73,7	1,1	52	78	1,1	0,04	0,21	3	4,6	3,2
	55,3	74,6	1,1	52	78	1,1	0,045	0,26	2,4	3,7	2,5
	67,7	89,5	1,5	54	91	1,5	0,04	0,23	2,7	4,2	2,8
	60,1	87,4	1,5	54	91	1,5	0,05	0,33	1,9	3	2
50	61,7	79,5	1,1	57	83	1,1	0,04	0,21	3	4,6	3,2
	61,5	81,5	1,1	57	83	1,1	0,045	0,23	2,7	4,2	2,8
	70,3	95	2	61	99	2	0,04	0,24	2,6	4,1	2,8
	65,8	94,4	2	61	99	2	0,05	0,43	1,5	2,3	1,6
55	70,1	88,4	1,5	64	91	1,5	0,04	0,19	3,3	5,1	3,6
	67,7	89,5	1,5	64	91	1,5	0,045	0,23	2,7	4,2	2,8
	77,7	104	2	66	109	2	0,04	0,23	2,7	4,2	2,8
	72	103	2	66	109	2	0,05	0,4	1,6	2,4	1,6
60	78	97,6	1,5	69	101	1,5	0,04	0,19	3,3	5,1	3,6
	74,5	98,6	1,5	69	101	1,5	0,045	0,24	2,6	4,1	2,8
	91,6	118	2,1	72	118	2	0,04	0,22	2,9	4,5	2,8
	76,9	112	2,1	72	118	2	0,05	0,33	1,9	3	2
65	85,3	106	1,5	74	111	1,5	0,04	0,18	3,5	5,4	3,6
	80,7	107	1,5	74	111	1,5	0,045	0,24	2,6	4,1	2,8
	99	127	2,1	77	128	2	0,04	0,22	2,9	4,5	2,8
	85,5	122	2,1	77	128	2	0,05	0,37	1,7	2,6	1,8
70	87,4	109	1,5	79	116	1,5	0,04	0,18	3,5	5,4	3,6
	87,5	111	1,5	79	116	1,5	0,04	0,27	2,3	3,6	2,5
	97,7	129	2,1	82	138	2	0,045	0,22	2,9	4,5	2,8
	91,6	130	2,1	82	138	2	0,05	0,37	1,7	2,6	1,8

4.1 Self-aligning ball bearings
d **75 – 130** mm




Cylindrical bore



Tapered bore


Principal dimensions			Basic load ratings dynamic	static	Fatigue load limit	Speed ratings Reference speed	Limiting speed	Mass	Designations Bearing with cylindrical bore	tapered bore
d	D	B	C	C_0	P_u					
mm			kN		kN	r/min		kg	–	
75	130	25	39	15,6	0,8	10 000	6 700	1,35	**1215**	**1215 K**
	130	31	58,5	22	1,12	9 000	6 300	1,6	**2215 ETN9**	**2215 EKTN9**
	160	37	79,3	30	1,43	8 000	5 600	3,55	**1315**	**1315 K**
	160	55	124	43	2,04	7 500	5 600	4,7	**2315**	**2315 K**
80	140	26	39,7	17	0,83	9 500	6 000	1,65	**1216**	**1216 K**
	140	33	65	25,5	1,25	8 500	6 000	2	**2216 ETN9**	**2216 EKTN9**
	170	39	88,4	33,5	1,5	7 500	5 300	4,2	**1316**	**1316 K**
	170	58	135	49	2,24	7 000	5 300	6,1	**2316**	**2316 K**
85	150	28	48,8	20,8	0,98	9 000	5 600	2,05	**1217**	**1217 K**
	150	36	58,5	23,6	1,12	8 000	5 600	2,5	**2217**	**2217 K**
	180	41	97,5	38	1,7	7 000	4 800	5	**1317**	**1317 K**
	180	60	140	51	2,28	6 700	4 800	7,05	**2317**	**2317 K**
90	160	30	57,2	23,6	1,08	8 500	5 300	2,5	**1218**	**1218 K**
	160	40	70,2	28,5	1,32	7 500	5 300	3,4	**2218**	**2218 K**
	190	43	117	44	1,93	6 700	4 500	5,8	**1318**	**1318 K**
	190	64	151	57	2,5	6 300	4 500	8,45	**2318**	**2318 K**
95	170	32	63,7	27	1,2	8 000	5 000	3,1	**1219**	**1219 K**
	170	43	83,2	34,5	1,53	7 000	5 000	4,1	**2219**	**2219 K**
	200	45	133	51	2,16	6 300	4 300	6,7	**1319**	**1319 K**
	200	67	165	64	2,75	6 000	4 500	9,8	**2319 M**	**2319 KM**
100	180	34	68,9	30	1,29	7 500	4 800	3,7	**1220**	**1220 K**
	180	46	97,5	40,5	1,76	6 700	4 800	5	**2220**	**2220 K**
	215	47	143	57	2,36	6 000	4 000	8,3	**1320**	**1320 K**
	215	73	190	80	3,25	5 600	4 000	12,5	**2320**	**2320 K**
110	200	38	88,4	39	1,6	6 700	4 300	5,15	**1222**	**1222 K**
	200	53	124	52	2,12	6 000	4 300	7,1	**2222**	**2222 K**
	240	50	163	72	2,75	5 300	3 600	12	**1322 M**	**1322 KM**
120	215	42	119	53	2,12	6 300	4 000	6,75	**1224 M**	**1224 KM**
130	230	46	127	58,5	2,24	5 600	3 600	8,3	**1226 M**	**1226 KM**




Dimensions				Abutment and fillet dimensions			Calculation factors				
d	d_2 ~	D_1 ~	$r_{1,2}$ min.	d_a min.	D_a max.	r_a max.	k_r	e	Y_1	Y_2	Y_0
mm				mm			–				
75	93	116	1,5	84	121	1,5	0,04	0,17	3,7	5,7	4
	91,6	118	1,5	84	121	1,5	0,045	0,22	2,9	4,5	2,8
	104	138	2,1	87	148	2	0,045	0,22	2,9	4,5	2,8
	97,8	139	2,1	87	148	2	0,05	0,37	1,7	2,6	1,8
80	101	125	2	91	129	2	0,04	0,16	3,9	6,1	4
	99	127	2	91	129	2	0,045	0,22	2,9	4,5	2,8
	109	147	2,1	92	158	2	0,045	0,22	2,9	4,5	2,8
	104	148	2,1	92	158	2	0,05	0,37	1,7	2,6	1,8
85	107	134	2	96	139	2	0,04	0,17	3,7	5,7	4
	105	133	2	96	139	2	0,04	0,25	2,5	3,9	2,5
	117	155	3	99	166	3	0,045	0,22	2,9	4,5	2,8
	115	157	3	99	166	3	0,05	0,37	1,7	2,6	1,8
90	112	142	2	101	149	2	0,04	0,17	3,7	5,7	4
	112	142	2	101	149	2	0,04	0,27	2,3	3,6	2,5
	122	165	3	104	176	3	0,045	0,22	2,9	4,5	2,8
	121	164	3	104	176	3	0,05	0,37	1,7	2,6	1,8
95	120	151	2,1	107	158	2	0,04	0,17	3,7	5,7	4
	118	151	2,1	107	158	2	0,04	0,27	2,3	3,6	2,5
	127	174	3	109	186	3	0,045	0,23	2,7	4,2	2,8
	128	172	3	109	186	3	0,05	0,37	1,7	2,6	1,8
100	127	159	2,1	112	168	2	0,04	0,17	3,7	5,7	4
	124	160	2,1	112	168	2	0,04	0,27	2,3	3,6	2,5
	136	185	3	114	201	3	0,045	0,23	2,7	4,2	2,8
	135	186	3	114	201	3	0,05	0,37	1,7	2,6	1,8
110	140	176	2,1	122	188	2	0,04	0,17	3,7	5,7	4
	137	177	2,1	122	188	2	0,04	0,28	2,2	3,5	2,5
	154	206	3	124	226	3	0,045	0,22	2,9	4,5	2,8
120	149	190	2,1	132	203	2	0,04	0,19	3,3	5,1	3,6
130	163	204	3	144	216	3	0,04	0,19	3,3	5,1	3,6

4.1 Self-aligning ball bearings

d **150 – 240** mm

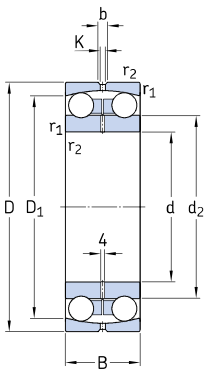


Principal dimensions			**Basic load ratings** dynamic	static	**Fatigue load limit**	**Speed ratings** Reference speed	Limiting speed	**Mass**	**Designation**
d	D	B	C	C_0	P_u				
mm			kN		kN	r/min		kg	–
150	225	56	57,2	23,6	0,88	5 600	3 400	7,5	**13030**
180	280	74	95,6	40	1,34	4 500	2 800	16	**13036**
200	280	60	60,5	29	0,97	4 300	2 600	10,7	**13940**
220	300	60	60,5	30,5	0,97	3 800	2 400	11	**13944**
240	320	60	60,5	32	0,98	3 800	2 200	11,3	**13948**




Dimensions						Abutment and fillet dimensions			Calculation factors				
d	d_2 ~	D_1 ~	b	K	$r_{1,2}$ min.	d_a min.	D_a max.	r_a max.	k_r	e	Y_1	Y_2	Y_0
mm						mm			–				
150	175	203	8,3	4,5	2,1	161	214	2	0,02	0,24	2,6	4,1	2,8
180	212	249	13,9	7,5	2,1	191	269	2	0,02	0,25	2,5	3,9	2,5
200	229	258	8,3	4,5	2,1	211	269	2	0,015	0,19	3,3	5,1	3,6
220	249	278	8,3	4,5	2,1	231	289	2	0,015	0,18	3,5	5,4	3,6
240	269	298	8,3	4,5	2,1	251	309	2	0,015	0,16	3,9	6,1	4

4.2 Sealed self-aligning ball bearings
d **10 – 70** mm

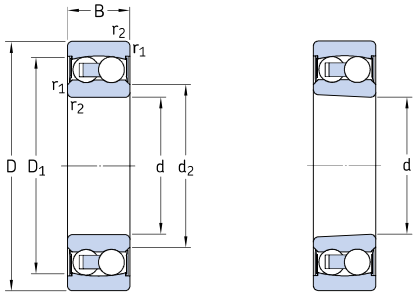


Cylindrical bore Tapered bore

Principal dimensions			Basic load ratings dynamic	static	Fatigue load limit	Limiting speed	Mass	Designations Bearing with cylindrical bore	tapered bore
d	D	B	C	C_0	P_u				
mm			kN		kN	r/min	kg	–	
10	30	14	5,53	1,18	0,06	17 000	0,048	**2200 E-2RS1TN9**	–
12	32	14	6,24	1,43	0,08	16 000	0,053	**2201 E-2RS1TN9**	–
15	35	14	7,41	1,76	0,09	14 000	0,058	**2202 E-2RS1TN9**	–
	42	17	10,8	2,6	0,14	12 000	0,11	**2302 E-2RS1TN9**	–
17	40	16	8,84	2,2	0,12	12 000	0,089	**2203 E-2RS1TN9**	–
	47	19	12,7	3,4	0,18	11 000	0,16	**2303 E-2RS1TN9**	–
20	47	18	12,7	3,4	0,18	10 000	0,14	**2204 E-2RS1TN9**	–
	52	21	14,3	4	0,21	9 000	0,21	**2304 E-2RS1TN9**	–
25	52	18	14,3	4	0,21	9 000	0,16	**2205 E-2RS1TN9**	**2205 E-2RS1KTN9**
	62	24	19	5,4	0,28	7 500	0,34	**2305 E-2RS1TN9**	**2305 E-2RS1KTN9**
30	62	20	15,6	4,65	0,24	7 500	0,26	**2206 E-2RS1TN9**	**2206 E-2RS1KTN9**
	72	27	22,5	6,8	0,36	6 700	0,51	**2306 E-2RS1TN9**	**2306 E-2RS1KTN9**
35	72	23	19	6	0,31	6 300	0,41	**2207 E-2RS1TN9**	**2207 E-2RS1KTN9**
	80	31	26,5	8,5	0,43	5 600	0,7	**2307 E-2RS1TN9**	**2307 E-2RS1KTN9**
40	80	23	19,9	6,95	0,36	5 600	0,5	**2208 E-2RS1TN9**	**2208 E-2RS1KTN9**
	90	33	33,8	11,2	0,57	5 000	0,96	**2308 E-2RS1TN9**	**2308 E-2RS1KTN9**
45	85	23	22,9	7,8	0,4	5 300	0,53	**2209 E-2RS1TN9**	**2209 E-2RS1KTN9**
	100	36	39	13,4	0,7	4 500	1,3	**2309 E-2RS1TN9**	**2309 E-2RS1KTN9**
50	90	23	22,9	8,15	0,42	4 800	0,57	**2210 E-2RS1TN9**	**2210 E-2RS1KTN9**
	110	40	43,6	14	0,72	4 000	1,65	**2310 E-2RS1TN9**	**2310 E-2RS1KTN9**
55	100	25	27,6	10,6	0,54	4 300	0,79	**2211 E-2RS1TN9**	**2211 E-2RS1KTN9**
60	110	28	31,2	12,2	0,62	3 800	1,05	**2212 E-2RS1TN9**	**2212 E-2RS1KTN9**
65	120	31	35,1	14	0,72	3 600	1,4	**2213 E-2RS1TN9**	**2213 E-2RS1KTN9**
70	125	31	35,8	14,6	0,75	3 400	1,45	**2214 E-2RS1TN9**	–




Dimensions				Abutment and fillet dimensions				Calculation factors				
d	d_2 ~	D_1 ~	$r_{1,2}$ min.	d_a min.	d_a max.	D_a max.	r_a max.	k_r	e	Y_1	Y_2	Y_0
mm				mm				–				
10	14	24,8	0,6	14	14	25,8	0,6	0,045	0,33	1,9	3	2
12	15,5	27,4	0,6	15,5	15,5	27,8	0,6	0,045	0,33	1,9	3	2
15	19,1	30,4	0,6	19	19	30,8	0,6	0,045	0,33	1,9	3	2
	20,3	36,3	1	20	20	36,4	1	0,05	0,31	2	3,1	2,2
17	21,1	35	0,6	21	21	35,8	0,6	0,045	0,31	2	3,1	2,2
	25,5	41,3	1	22	25,5	41,4	1	0,05	0,3	2,1	3,3	2,2
20	25,9	41,3	1	25	25,5	41,4	1	0,045	0,3	2,1	3,3	2,2
	28,6	46,3	1,1	26,5	28,5	45	1,1	0,05	0,28	2,2	3,5	2,5
25	31	46,3	1	30,6	31	46,4	1	0,045	0,28	2,2	3,5	2,5
	32,8	52,7	1,1	32	32,5	55	1,1	0,05	0,28	2,2	3,5	2,5
30	36,7	54,1	1	35,6	36,5	56,4	1	0,045	0,25	2,5	3,9	2,5
	40,4	61,9	1,1	37	40	65	1,1	0,05	0,25	2,5	3,9	2,5
35	42,7	62,7	1,1	42	42,5	65	1,1	0,045	0,23	2,7	4,2	2,8
	43,7	69,2	1,5	43,5	43,5	71	1,5	0,05	0,25	2,5	3,9	2,5
40	49	69,8	1,1	47	49	73	1,1	0,045	0,22	2,9	4,5	2,8
	55,4	81,8	1,5	49	55	81	1,5	0,05	0,23	2,7	4,2	2,8
45	53,1	75,3	1,1	52	53	78	1,1	0,045	0,21	3	4,6	3,2
	60,9	90	1,5	54	60,5	91	1,5	0,05	0,23	2,7	4,2	2,8
50	58,1	79,5	1,1	57	58	83	1,1	0,045	0,2	3,2	4,9	3,2
	62,9	95,2	2	61	62,5	99	2	0,05	0,24	2,6	4,1	2,8
55	65,9	88,5	1,5	64	65,5	91	1,5	0,045	0,19	3,3	5,1	3,6
60	73,2	97	1,5	69	73	101	1,5	0,045	0,19	3,3	5,1	3,6
65	79,3	106	1,5	74	79	111	1,5	0,045	0,18	3,5	5,4	3,6
70	81,4	109	1,5	79	81	116	1,5	0,045	0,18	3,5	5,4	3,6

4.3 Self-aligning ball bearings with an extended inner ring
d **20 – 60** mm




Principal dimensions			Basic load ratings dynamic	static	Fatigue load limit	Limiting speed	Mass	Designation
d	D	C	C	C_0	P_u			
mm			kN		kN	r/min	kg	–
20	47	14	12,7	3,4	0,18	9 000	0,18	**11204 ETN9**
25	52	15	14,3	4	0,21	8 000	0,22	**11205 ETN9**
30	62	16	15,6	4,65	0,24	6 700	0,35	**11206 TN9**
35	72	17	19	6	0,305	5 600	0,54	**11207 TN9**
40	80	18	19	6,55	0,335	5 000	0,72	**11208 TN9**
45	85	19	22,9	7,8	0,4	4 500	0,77	**11209 TN9**
50	90	20	26,5	9,15	0,475	4 300	0,85	**11210 TN9**
60	110	22	31,2	12,2	0,62	3 400	1,15	**11212 TN9**




Dimensions					Abutment and fillet dimensions		Calculation factors				
d	d_2 ~	D_1 ~	B	$r_{1,2}$ min.	D_a max.	r_a max.	k_r	e	Y_1	Y_2	Y_0
mm					mm		–				
20	28,9	41	40	1	41,4	1	0,04	0,3	2,1	3,3	2,2
25	33,3	45,6	44	1	46,4	1	0,04	0,28	2,2	3,5	2,5
30	40,1	53,2	48	1	56,4	1	0,04	0,25	2,5	3,9	2,5
35	47,7	60,7	52	1,1	65	1,1	0,04	0,23	2,7	4,2	2,8
40	54	68,8	56	1,1	73	1,1	0,04	0,22	2,9	4,5	2,8
45	57,7	73,7	58	1,1	78	1,1	0,04	0,21	3	4,6	3,2
50	62,7	78,7	58	1,1	83	1,1	0,04	0,21	3	4,6	3,2
60	78	97,5	62	1,5	101	1,5	0,04	0,19	3,3	5,1	3,6


4.4 Self-aligning ball bearings on an adapter sleeve
d_1 **17 – 115** mm



Open bearing on a standard sleeve



Sealed bearing on an E design sleeve



Principal dimensions			Abutment dimensions			Mass Bearing incl. sleeve	Designations Bearing[1]	Adapter sleeve[2]
d_1	D	B	d_a max.	d_b min.	B_a min.			
mm			mm			kg	–	
17	47	14	28,5	23	5	0,16	**1204 EKTN9**	**H 204**
20	52	15	33	28	5	0,21	**1205 EKTN9**	**H 205**
	52	18	31	28	5	0,23	**2205 E-2RS1KTN9**	**H 305 E**
	52	18	32	28	5	0,23	**2205 EKTN9**	**H 305**
	62	17	37	28	6	0,33	**1305 EKTN9**	**H 305**
	62	24	32,5	29	5	0,42	**2305 E-2RS1KTN9**	**H 2305**
	62	24	35,5	29	5	0,42	**2305 EKTN9**	**H 2305**
25	62	16	40	33	5	0,32	**1206 EKTN9**[3]	**H 206**
	62	20	36,5	33	5	0,36	**2206 E-2RS1KTN9**	**H 306 E**
	62	20	38	33	5	0,36	**2206 EKTN9**	**H 306**
	72	19	44	33	6	0,49	**1306 EKTN9**	**H 306**
	72	27	40	35	5	0,62	**2306 E-2RS1KTN9**	**H 2306**
	72	27	41	35	5	0,61	**2306 K**	**H 2306**
30	72	17	47	38	5	0,44	**1207 EKTN9**[3]	**H 207**
	72	23	42,5	39	5	0,55	**2207 E-2RS1KTN9**	**H 307 E**
	72	23	45	39	5	0,54	**2207 EKTN9**	**H 307**
	80	21	51	39	7	0,65	**1307 EKTN9**	**H 307**
	80	31	43,5	40	5	0,86	**2307 E-2RS1KTN9**	**H 2307 E**
	80	31	46	40	5	0,84	**2307 EKTN9**	**H 2307**
35	80	18	53	43	6	0,58	**1208 EKTN9**[3]	**H 208**
	80	23	49	44	6	0,67	**2208 E-2RS1KTN9**	**H 308 E**
	80	23	52	44	6	0,58	**2208 EKTN9**	**H 308**
	90	23	61	44	6	0,85	**1308 EKTN9**	**H 308**
	90	33	55	45	6	1,2	**2308 E-2RS1KTN9**	**H 2308**
	90	33	53	45	6	1,1	**2308 EKTN9**	**H 2308**
40	85	19	57	48	6	0,68	**1209 EKTN9**[3]	**H 209**
	85	23	53	50	8	0,76	**2209 E-2RS1KTN9**	**H 309 E**
	85	23	55	50	8	0,78	**2209 EKTN9**	**H 309**
	100	25	67	50	6	1,2	**1309 EKTN9**	**H 309**
	100	36	60,5	50	6	1,55	**2309 E-2RS1KTN9**	**H 2309**
	100	36	60	50	6	1,4	**2309 EKTN9**	**H 2309**

[1] For additional bearing data → **product tables, page 552** (open bearings) and **page 560** (sealed bearings)
[2] For additional adapter sleeve data → **product tables, page 1290**
[3] Bearings and sleeves also available as KAM self-aligning ball bearing kits (→ **page 547**)

Principal dimensions			Abutment dimensions			Mass	Designations	
						Bearing incl. sleeve	Bearing[1]	Adapter sleeve[2]
d_1	D	B	d_a max.	d_b min.	B_a min.			
mm			mm			kg	–	
45	90	20	62	53	6	0,77	**1210 EKTN9**[3]	**H 210**
	90	23	58	55	10	0,84	**2210 E-2RS1KTN9**	**H 310 E**
	90	23	61	55	10	0,87	**2210 EKTN9**	**H 310**
	110	27	70	55	6	1,45	**1310 EKTN9**	**H 310**
	110	40	62,5	56	6	2	**2310 E-2RS1KTN9**	**H 2310**
	110	40	65	56	6	1,9	**2310 K**	**H 2310**
50	100	21	70	60	7	0,99	**1211 EKTN9**[3]	**H 211**
	100	25	65,5	60	11	1,1	**2211 E-2RS1KTN9**	**H 311 E**
	100	25	67	60	11	1,15	**2211 EKTN9**	**H 311**
	120	29	77	60	7	1,9	**1311 EKTN9**	**H 311**
	120	43	72	61	7	2,4	**2311 K**	**H 2311**
55	110	22	78	64	7	1,2	**1212 EKTN9**	**H 212**
	110	28	73	65	9	1,4	**2212 E-2RS1KTN9**	**H 312 E**
	110	28	74	65	9	1,45	**2212 EKTN9**	**H 312**
	130	31	87	65	7	2,15	**1312 EKTN9**	**H 312**
	130	46	76	66	7	2,95	**2312 K**	**H 2312**
60	120	23	85	70	7	1,45	**1213 EKTN9**	**H 213**
	120	31	79	70	7	1,75	**2213 E-2RS1KTN9**	**H 313 E**
	120	31	80	70	9	1,8	**2213 EKTN9**	**H 313**
	140	33	98	70	7	2,85	**1313 EKTN9**	**H 313**
	140	48	85	72	7	3,6	**2313 K**	**H 2313**
65	130	25	93	80	7	2	**1215 K**	**H 215**
	130	31	93	80	13	2,3	**2215 EKTN9**	**H 315**
	160	37	104	80	7	4,2	**1315 K**	**H 315**
	160	55	97	82	7	5,55	**2315 K**	**H 2315**
70	140	26	101	85	7	2,4	**1216 K**	**H 216**
	140	33	99	85	13	2,85	**2216 EKTN9**	**H 316**
	170	39	109	85	7	5	**1316 K**	**H 316**
	170	58	104	88	7	7,1	**2316 K**	**H 2316**
75	150	28	107	90	8	2,95	**1217 K**	**H 217**
	150	36	105	91	13	3,3	**2217 K**	**H 317**
	180	41	117	91	8	6	**1317 K**	**H 317**
	180	60	111	94	8	8,15	**2317 K**	**H 2317**
80	160	30	112	95	8	3,5	**1218 K**	**H 218**
	160	40	112	96	11	5,5	**2218 K**	**H 318**
	190	43	122	96	8	6,9	**1318 K**	**H 318**
	190	64	115	100	8	9,8	**2318 K**	**H 2318**
85	170	32	120	100	8	4,25	**1219 K**	**H 219**
	170	43	118	102	10	5,3	**2219 K**	**H 319**
	200	45	127	102	8	7,9	**1319 K**	**H 319**
	200	67	128	105	8	11,5	**2319 KM**	**H 2319**
90	180	34	127	106	8	5	**1220 K**	**H 220**
	180	46	124	108	9	6,4	**2220 K**	**H 320**
	215	47	136	108	8	9,65	**1320 K**	**H 320**
	215	73	130	110	8	14	**2320 K**	**H 2320**
100	200	38	140	116	8	6,8	**1222 K**	**H 222**
	200	53	137	118	8	8,85	**2222 K**	**H 322**
	240	50	154	118	10	13,5	**1322 KM**	**H 322**
110	215	42	150	127	12	8,3	**1224 KM**	**H 3024**
115	230	46	163	137	15	11	**1226 KM**	**H 3026**

[1] For additional bearing data → **product tables**, **page 552** (open bearings) and **page 560** (sealed bearings)
[2] For additional adapter sleeve data → **product tables**, **page 1290**
[3] Bearings and sleeves also available as KAM self-aligning ball bearing kits (→ **page 547**)