
Designation system



Prefixes

BS2-..	Bearing, designated by a drawing number
E2.	SKF Energy Efficient bearing
ZE	Bearing with SensorMount feature

Basic designation

Listed in **diagram 2** (→ **page 43**)
Figure with four digits: drawing number identification

Suffixes

Group 1: Internal design


CA, CAC	Retaining flanges on the inner ring, guide ring centred on the inner ring, machined brass cage
CC(J), CJ	Flangeless inner ring, guide ring centred on the inner ring, two stamped steel cages
CCJA, EJA	Flangeless inner ring, guide ring centred on the outer ring raceway, two stamped steel cages
E	Optimized internal design for increased load carrying capacity 213, 222 and 223 series: Flangeless inner ring and two stamped steel cages. Annular groove and three lubrication holes in the outer ring. d ≤ 65 mm: Guide ring centred on the inner ring d > 65 mm: Guide ring centred on the cage

Group 2: External design (seals, snap ring groove etc.)

-CS, -2CS	Contact seal, NBR, on one or both sides
-CS2, -2CS2	Contact seal, FKM, on one or both sides
-CS5, -2CS5	Contact seal, HNBR, on one or both sides
K	Tapered bore, taper 1:12
K30	Tapered bore, taper 1:30


Group 3: Cage design

F	Machined steel cage, inner ring centred
FA	Machined steel cage, outer ring centred
J	Stamped steel cage, inner ring centred
JA	Stamped steel cage, outer ring centred
MA	Machined brass cage, outer ring centred

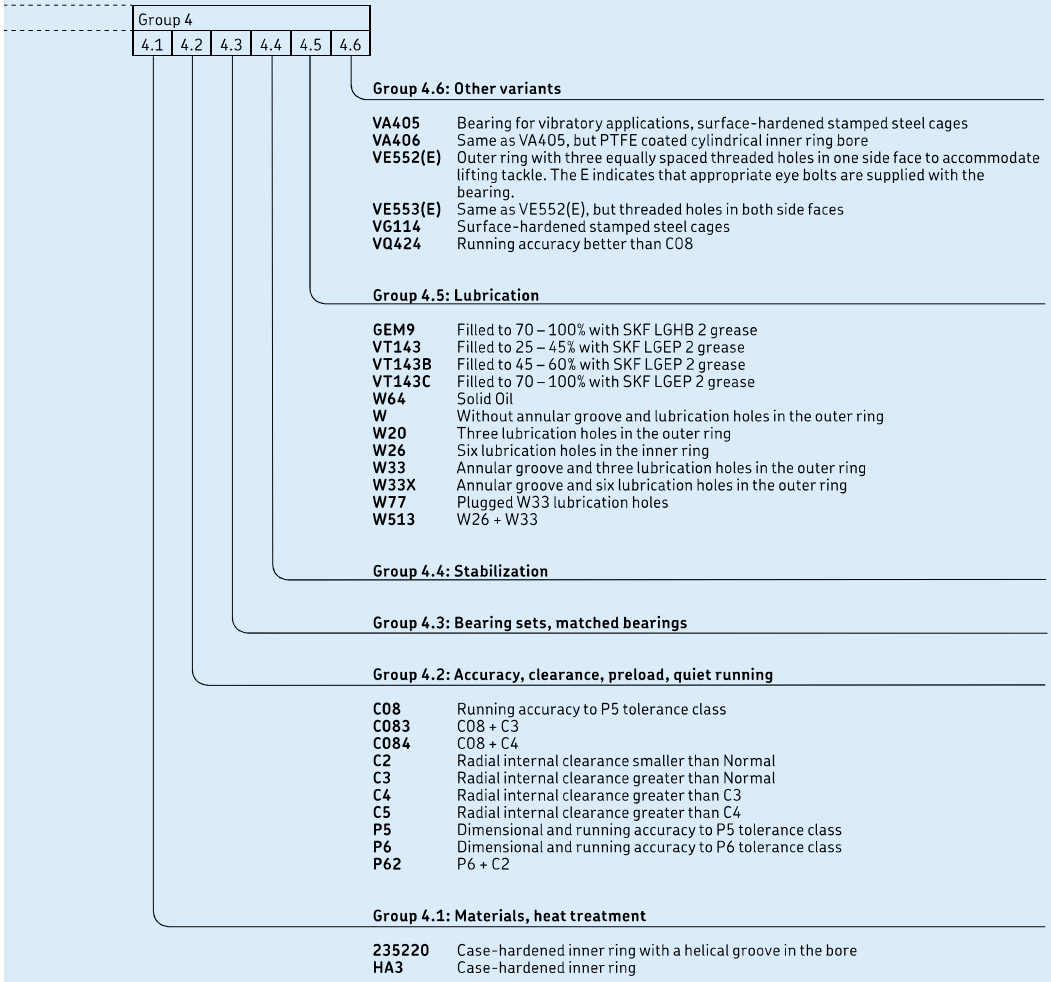
Group 4
4.1
4.2
4.3
4.4
4.5
4.6
Group 4.6: Other variants
VA405 Bearing for vibratory applications, surface-hardened stamped steel cages
VA406 Same as VA405, but PTFE coated cylindrical inner ring bore
VE552(E) Outer ring with three equally spaced threaded holes in one side face to accommodate lifting tackle. The E indicates that appropriate eye bolts are supplied with the bearing.
VE553(E) Same as VE552(E), but threaded holes in both side faces
VG114 Surface-hardened stamped steel cages
VQ424 Running accuracy better than C08
Group 4.5: Lubrication
GEM9 Filled to 70 – 100% with SKF LGHB 2 grease
VT143 Filled to 25 – 45% with SKF LGEP 2 grease
VT143B Filled to 45 – 60% with SKF LGEP 2 grease
VT143C Filled to 70 – 100% with SKF LGEP 2 grease
W64 Solid Oil
W Without annular groove and lubrication holes in the outer ring
W20 Three lubrication holes in the outer ring
W26 Six lubrication holes in the inner ring
W33 Annular groove and three lubrication holes in the outer ring
W33X Annular groove and six lubrication holes in the outer ring
W77 Plugged W33 lubrication holes
W513 W26 + W33
Group 4.4: Stabilization
Group 4.3: Bearing sets, matched bearings
Group 4.2: Accuracy, clearance, preload, quiet running
C08 Running accuracy to P5 tolerance class
C083 C08 + C3
C084 C08 + C4
C2 Radial internal clearance smaller than Normal
C3 Radial internal clearance greater than Normal
C4 Radial internal clearance greater than C3
C5 Radial internal clearance greater than C4
P5 Dimensional and running accuracy to P5 tolerance class
P6 Dimensional and running accuracy to P6 tolerance class
P62 P6 + C2
Group 4.1: Materials, heat treatment
235220 Case-hardened inner ring with a helical groove in the bore
HA3 Case-hardened inner ring

8.1 Spherical roller bearings


d **20 – 60** mm

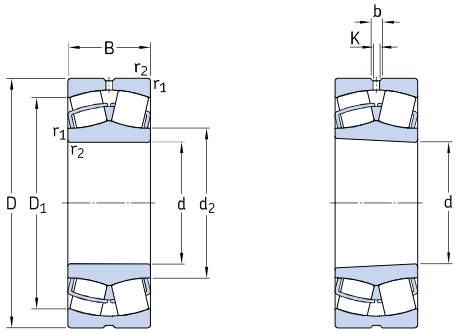

Cylindrical bore | Tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designations	
			dynamic	static		Reference	Limiting		Bearing with cylindrical bore	tapered bore
d	D	B	C	C_0	P_u	speed	speed			
mm			kN		kN	r/min		kg	–	
20	52	18	49	44	4,75	13 000	17 000	0,28	* **22205/20 E**	–
25	52	18	49	44	4,75	13 000	17 000	0,26	* **22205 E**	* **22205 EK**
	62	17	48	41,5	4,55	9 300	12 000	0,28	* **21305 CC**	–
30	62	20	64	60	6,4	10 000	14 000	0,29	* **22206 E**	* **22206 EK**
	72	19	64	61	6,8	8 200	10 000	0,41	* **21306 CC**	* **21306 CCK**
35	72	23	86,5	85	9,3	9 000	12 000	0,45	* **22207 E**	* **22207 EK**
	80	21	76,5	72	8,15	7 300	9 500	0,55	* **21307 CC**	* **21307 CCK**
40	80	23	96,5	90	9,8	8 000	11 000	0,53	* **22208 E**	* **22208 EK**
	90	23	104	108	11,8	7 000	9 500	0,75	* **21308 E**	* **21308 EK**
	90	33	150	140	15	6 000	8 000	1,05	* **22308 E**	* **22308 EK**
45	85	23	102	98	10,8	7 500	10 000	0,58	* **22209 E**	* **22209 EK**
	85	23	96,5	93	9,65	11 000	10 000	0,58	**E2.22209**[1]	**E2.22209 K**[1]
	100	25	125	127	13,7	6 300	8 500	0,99	* **21309 E**	* **21309 EK**
	100	36	183	183	19,6	5 300	7 000	1,4	* **22309 E**	* **22309 EK**
50	90	23	104	108	11,8	7 000	9 500	0,63	* **22210 E**	* **22210 EK**
	90	23	100	102	10,8	10 000	9 500	0,63	**E2.22210**[1]	**E2.22210 K**[1]
	110	27	156	166	18,6	5 600	7 500	1,35	* **21310 E**	* **21310 EK**
	110	40	220	224	24	4 800	6 300	1,9	* **22310 E**	* **22310 EK**
55	100	25	125	127	13,7	6 300	8 500	0,84	* **22211 E**	* **22211 EK**
	100	25	120	120	12,5	9 000	8 500	0,84	**E2.22211**[1]	**E2.22211 K**[1]
	120	29	156	166	18,6	5 600	7 500	1,7	* **21311 E**	* **21311 EK**
	120	43	270	280	30	4 300	5 600	2,45	* **22311 E**	* **22311 EK**
60	110	28	156	166	18,6	5 600	7 500	1,15	* **22212 E**	* **22212 EK**
	110	28	150	156	16,6	8 000	7 500	1,15	**E2.22212**[1]	**E2.22212 K**[1]
	130	31	212	240	26,5	4 800	6 300	2,1	* **21312 E**	* **21312 EK**
	130	46	310	335	36,5	4 000	5 300	3,1	* **22312 E**	* **22312 EK**


[1] Recommended speed > 500 r/min
* SKF Explorer bearing
E2 → **SKF Energy Efficient** bearing



Dimensions						Abutment and fillet dimensions			Calculation factors			
d	d_2 ~	D_1 ~	b	K	$r_{1,2}$ min.	d_a min.	D_a max.	r_a max.	e	Y_1	Y_2	Y_0
mm						mm			–			
20	31,3	44,2	3,7	2	1	25,6	46,4	1	0,35	1,9	2,9	1,8
25	31,3	44,2	3,7	2	1	30,6	46,4	1	0,35	1,9	2,9	1,8
	35,7	50,7	–	–	1,1	32	55	1	0,3	2,3	3,4	2,2
30	37,6	53	3,7	2	1	35,6	56,4	1	0,31	2,2	3,3	2,2
	43,3	58,8	–	–	1,1	37	65	1	0,27	2,5	3,7	2,5
35	44,5	61,8	3,7	2	1,1	42	65	1	0,31	2,2	3,3	2,2
	47,2	65,6	–	–	1,5	44	71	1,5	0,28	2,4	3,6	2,5
40	49,6	69,4	6	3	1,1	47	73	1	0,28	2,4	3,6	2,5
	60	79,8	5,5	3	1,5	49	81	1,5	0,24	2,8	4,2	2,8
	49,9	74,3	6	3	1,5	49	81	1,5	0,37	1,8	2,7	1,8
45	54,4	74,4	5,5	3	1,1	52	78	1	0,26	2,6	3,9	2,5
	54,4	74,4	5,5	3	1,1	52	78	1	0,26	2,6	3,9	2,5
	65,3	88	6	3	1,5	54	91	1,5	0,24	2,8	4,2	2,8
	57,6	83,4	6	3	1,5	54	91	1,5	0,37	1,8	2,7	1,8
50	60	79	5,5	3	1,1	57	83	1	0,24	2,8	4,2	2,8
	59,9	79	5,5	3	1,1	57	83	1	0,24	2,8	4,2	2,8
	72,7	96,8	6	3	2	61	99	2	0,24	2,8	4,2	2,8
	63,9	91,9	6	3	2	61	99	2	0,37	1,8	2,7	1,8
55	65,3	88	6	3	1,5	64	91	1,5	0,24	2,8	4,2	2,8
	65,3	88	6	3	1,5	64	91	1,5	0,24	2,8	4,2	2,8
	72,7	96,2	6	3	2	66	109	2	0,24	2,8	4,2	2,8
	70,1	102	5,5	3	2	66	109	2	0,35	1,9	2,9	1,8
60	72,7	96,5	6	3	1,5	69	101	1,5	0,24	2,8	4,2	2,8
	71,6	96,5	6	3	1,5	69	101	1,5	0,24	2,8	4,2	2,8
	87,8	115	6	3	2,1	72	118	2	0,22	3	4,6	2,8
	77,9	110	8,3	4,5	2,1	72	118	2	0,35	1,9	2,9	1,8

8.1 Spherical roller bearings


d **65 – 95** mm

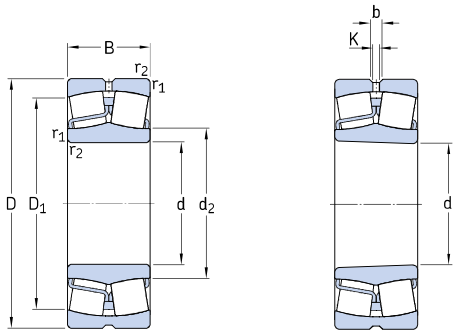

Cylindrical bore | Tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designations	
			dynamic	static		Refer-	Limit-		Bearing with	
d	D	B	C	C_0	P_u	ence speed	ing speed		cylindrical bore	tapered bore
mm			kN		kN	r/min		kg	–	
65	100	35	132	173	20,4	4 300	6 300	0,95	* **24013 CC/W33**	* **24013 CCK30/W33**
	120	31	193	216	24	5 000	7 000	1,55	* **22213 E**	* **22213 EK**
	120	31	168	204	21,2	7 000	7 000	1,55	E2.22213[1)]	E2.22213 K[1)]
	140	33	236	270	29	4 300	6 000	2,55	* **21313 E**	* **21313 EK**
	140	48	340	360	38	3 800	5 000	3,75	* **22313 E**	* **22313 EK**
70	125	31	208	228	25,5	5 000	6 700	1,55	* **22214 E**	* **22214 EK**
	150	35	285	325	34,5	4 000	5 600	3,1	* **21314 E**	* **21314 EK**
	150	51	400	430	45	3 400	4 500	4,55	* **22314 E**	* **22314 EK**
75	115	40	173	232	28,5	3 800	5 300	1,55	* **24015 CC/W33**	* **24015 CCK30/W33**
	130	31	212	240	26,5	4 800	6 300	1,7	* **22215 E**	* **22215 EK**
	160	37	285	325	34,5	4 000	5 600	3,75	* **21315 E**	* **21315 EK**
	160	55	440	475	48	3 200	4 300	5,55	* **22315 E**	* **22315 EK**
80	140	33	236	270	29	4 300	6 000	2,1	* **22216 E**	* **22216 EK**
	170	39	325	375	39	3 800	5 300	4,45	* **21316 E**	* **21316 EK**
	170	58	490	540	54	3 000	4 000	6,6	* **22316 E**	* **22316 EK**
85	150	36	285	325	34,5	4 000	5 600	2,7	* **22217 E**	* **22217 EK**
	180	41	325	375	39	3 800	5 300	5,2	* **21317 E**	* **21317 EK**
	180	60	550	620	61	2 800	3 800	7,65	* **22317 E**	* **22317 EK**
90	160	40	325	375	39	3 800	5 300	3,4	* **22218 E**	* **22218 EK**
	160	52,4	355	440	48	2 800	3 800	4,65	* **23218 CC/W33**	* **23218 CCK/W33**
	190	43	380	450	46,5	3 600	4 800	6,1	* **21318 E**	* **21318 EK**
	190	64	610	695	67	2 600	3 600	9,05	* **22318 E**	* **22318 EK**
95	170	43	380	450	46,5	3 600	4 800	4,15	* **22219 E**	* **22219 EK**
	200	45	425	490	49	3 400	4 500	7,05	* **21319 E**	* **21319 EK**
	200	67	670	765	73,5	2 600	3 400	10,5	* **22319 E**	* **22319 EK**


[1)] Recommended speed > 500 r/min
* SKF Explorer bearing
E2 → **SKF Energy Efficient** bearing



Dimensions						Abutment and fillet dimensions			Calculation factors			
d	d_2 ~	D_1 ~	b	K	$r_{1,2}$ min.	d_a min.	D_a max.	r_a max.	e	Y_1	Y_2	Y_0
mm						mm			–			
65	73,9	87,3	3,7	2	1,1	71	94	1	0,27	2,5	3,7	2,5
	80,1	106	6	3	1,5	74	111	1,5	0,24	2,8	4,2	2,8
	77,6	106	6	3	1,5	74	111	1,5	0,24	2,8	4,2	2,8
	94,7	124	6	3	2,1	77	128	2	0,22	3	4,6	2,8
	81,6	118	8,3	4,5	2,1	77	128	2	0,35	1,9	2,9	1,8
70	83	111	6	3	1,5	79	116	1,5	0,23	2,9	4,4	2,8
	101	133	6	3	2,1	82	138	2	0,22	3	4,6	2,8
	90,3	128	8,3	4,5	2,1	82	138	2	0,33	2	3	2
75	84,2	100	5,5	3	1,1	81	109	1	0,28	2,4	3,6	2,5
	87,8	115	6	3	1,5	84	121	1,5	0,22	3	4,6	2,8
	101	133	6	3	2,1	87	148	2	0,22	3	4,6	2,8
	92,8	135	8,3	4,5	2,1	87	148	2	0,35	1,9	2,9	1,8
80	94,7	124	6	3	2	91	129	2	0,22	3	4,6	2,8
	106	141	6	3	2,1	92	158	2	0,24	2,8	4,2	2,8
	98,3	143	8,3	4,5	2,1	92	158	2	0,35	1,9	2,9	1,8
85	101	133	6	3	2	96	139	2	0,22	3	4,6	2,8
	106	141	6	3	3	99	166	2,5	0,24	2,8	4,2	2,8
	108	154	8,3	4,5	3	99	166	2,5	0,33	2	3	2
90	106	141	6	3	2	101	149	2	0,24	2,8	4,2	2,8
	106	137	5,5	3	2	101	149	2	0,31	2,2	3,3	2,2
	112	150	8,3	4,5	3	104	176	2,5	0,24	2,8	4,2	2,8
	113	161	11,1	6	3	104	176	2,5	0,33	2	3	2
95	112	150	8,3	4,5	2,1	107	158	2	0,24	2,8	4,2	2,8
	118	159	8,3	4,5	3	109	186	2,5	0,24	2,8	4,2	2,8
	118	168	11,1	6	3	109	186	2,5	0,33	2	3	2

8.1 Spherical roller bearings

d **100 – 130** mm

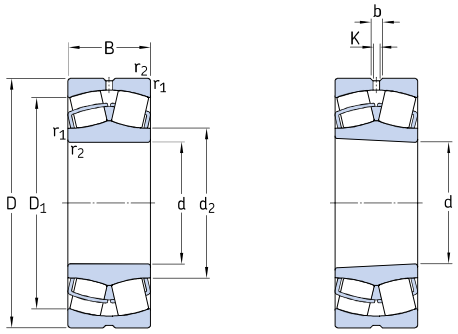


Cylindrical bore

Tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designations	
			dynamic	static		Refer-	Limit-		Bearing with	
d	D	B	C	C_0	P_u	ence speed	ing speed		cylindrical bore	tapered bore
mm			kN		kN	r/min		kg	–	
100	150	50	285	415	45,5	2 800	4 000	3,15	* **24020 CC/W33**	* **24020 CCK30/W33**
	165	52	365	490	53	3 000	4 000	4,55	* **23120 CC/W33**	* **23120 CCK/W33**
	165	65	455	640	68	2 400	3 200	5,65	* **24120 CC/W33**	* **24120 CCK30/W33**
	180	46	425	490	49	3 400	4 500	4,9	* **22220 E**	* **22220 EK**
	180	60,3	475	600	63	2 400	3 400	6,85	* **23220 CC/W33**	* **23220 CCK/W33**
	215	47	425	490	49	3 400	4 500	8,6	* **21320 E**	* **21320 EK**
	215	73	815	950	88	2 400	3 000	13,5	* **22320 E**	* **22320 EK**
110	170	45	310	440	46,5	3 400	4 300	3,8	* **23022 CC/W33**	* **23022 CCK/W33**
	170	60	415	620	67	2 400	3 600	5	* **24022 CC/W33**	* **24022 CCK30/W33**
	180	56	430	585	61	2 800	3 600	5,75	* **23122 CC/W33**	* **23122 CCK/W33**
	180	69	520	750	78	2 000	3 000	7,1	* **24122 CC/W33**	* **24122 CCK30/W33**
	200	53	560	640	63	3 000	4 000	7	* **22222 E**	* **22222 EK**
	200	69,8	600	765	76,5	2 200	3 200	9,85	* **23222 CC/W33**	* **23222 CCK/W33**
	240	80	950	1 120	100	2 000	2 800	18,5	* **22322 E**	* **22322 EK**
120	180	46	355	510	53	3 200	4 000	4,2	* **23024 CC/W33**	* **23024 CCK/W33**
	180	60	430	670	68	2 400	3 400	5,45	* **24024 CC/W33**	* **24024 CCK30/W33**
	200	62	510	695	71	2 600	3 400	8	* **23124 CC/W33**	* **23124 CCK/W33**
	200	80	655	950	95	1 900	2 600	10,5	* **24124 CC/W33**	* **24124 CCK30/W33**
	215	58	630	765	73,5	2 800	3 800	8,7	* **22224 E**	* **22224 EK**
	215	76	695	930	93	2 000	2 800	12	* **23224 CC/W33**	* **23224 CCK/W33**
	260	86	965	1 120	100	2 000	2 600	23	* **22324 CC/W33**	* **22324 CCK/W33**
130	200	52	430	610	62	2 800	3 600	6	* **23026 CC/W33**	* **23026 CCK/W33**
	200	69	540	815	81,5	2 000	3 000	8,05	* **24026 CC/W33**	* **24026 CCK30/W33**
	210	64	560	780	78	2 400	3 200	8,8	* **23126 CC/W33**	* **23126 CCK/W33**
	210	80	680	1 000	100	1 700	2 400	11	* **24126 CC/W33**	* **24126 CCK30/W33**
	230	64	735	930	88	2 600	3 600	11	* **22226 E**	* **22226 EK**
	230	80	780	1 060	104	1 900	2 600	14,5	* **23226 CC/W33**	* **23226 CCK/W33**
	280	93	1 120	1 320	114	1 800	2 400	29	* **22326 CC/W33**	* **22326 CCK/W33**


* SKF Explorer bearing



Dimensions						Abutment and fillet dimensions			Calculation factors			
d	d_2 ~	D_1 ~	b	K	$r_{1,2}$ min.	d_a min.	D_a max.	r_a max.	e	Y_1	Y_2	Y_0
mm						mm			–			
100	111	132	6	3	1,5	107	143	1,5	0,28	2,4	3,6	2,5
	115	144	6	3	2	111	154	2	0,3	2,3	3,4	2,2
	113	141	4,4	2	2	111	154	2	0,37	1,8	2,7	1,8
	118	159	8,3	4,5	2,1	112	168	2	0,24	2,8	4,2	2,8
	117	153	8,3	4,5	2,1	112	168	2	0,33	2	3	2
	118	159	8,3	4,5	3	114	201	2,5	0,24	2,8	4,2	2,8
	130	184	11,1	6	3	114	201	2,5	0,33	2	3	2
110	125	151	6	3	2	119	161	2	0,23	2,9	4,4	2,8
	122	149	5,5	3	2	119	161	2	0,33	2	3	2
	126	157	8,3	4,5	2	121	169	2	0,3	2,3	3,4	2,2
	123	153	6	3	2	121	169	2	0,37	1,8	2,7	1,8
	130	178	8,3	4,5	2,1	122	188	2	0,25	2,7	4	2,5
	130	169	8,3	4,5	2,1	122	188	2	0,33	2	3	2
	143	204	13,9	7,5	3	124	226	2,5	0,33	2	3	2
120	135	163	6	3	2	129	171	2	0,22	3	4,6	2,8
	132	159	6	3	2	129	171	2	0,3	2,3	3,4	2,2
	139	174	8,3	4,5	2	131	189	2	0,28	2,4	3,6	2,5
	135	168	6	3	2	131	189	2	0,37	1,8	2,7	1,8
	141	189	11,1	6	2,1	132	203	2	0,26	2,6	3,9	2,5
	141	182	8,3	4,5	2,1	132	203	2	0,35	1,9	2,9	1,8
	152	216	13,9	7,5	3	134	246	2,5	0,35	1,9	2,9	1,8
130	148	180	8,3	4,5	2	139	191	2	0,23	2,9	4,4	2,8
	145	175	6	3	2	139	191	2	0,31	2,2	3,3	2,2
	148	184	8,3	4,5	2	141	199	2	0,28	2,4	3,6	2,5
	146	180	6	3	2	141	199	2	0,35	1,9	2,9	1,8
	152	201	11,1	6	3	144	216	2,5	0,27	2,5	3,7	2,5
	151	196	8,3	4,5	3	144	216	2,5	0,33	2	3	2
	164	233	16,7	9	4	147	263	3	0,35	1,9	2,9	1,8

8.1 Spherical roller bearings

d **140 – 170** mm

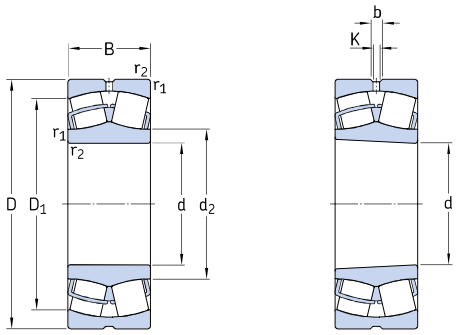


Cylindrical bore

Tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designations	
			dynamic	static		Reference	Limiting		Bearing with	
d	D	B	C	C_0	P_u	speed	speed		cylindrical bore	tapered bore
mm			kN		kN	r/min		kg	–	
140	210	53	465	680	68	2 600	3 400	6,55	* **23028 CC/W33**	* **23028 CCK/W33**
	210	69	570	900	88	2 000	2 800	8,55	* **24028 CC/W33**	* **24028 CCK30/W33**
	225	68	630	900	88	2 200	2 800	10,5	* **23128 CC/W33**	* **23128 CCK/W33**
	225	85	765	1 160	112	1 600	2 200	13,5	* **24128 CC/W33**	* **24128 CCK30/W33**
	250	68	710	900	86,5	2 400	3 200	14	* **22228 CC/W33**	* **22228 CCK/W33**
	250	88	915	1 250	120	1 700	2 400	19	* **23228 CC/W33**	* **23228 CCK/W33**
	300	102	1 290	1 560	132	1 700	2 200	36,5	* **22328 CC/W33**	* **22328 CCK/W33**
150	225	56	510	750	73,5	2 400	3 200	7,95	* **23030 CC/W33**	* **23030 CCK/W33**
	225	75	655	1 040	100	1 800	2 600	10,5	* **24030 CC/W33**	* **24030 CCK30/W33**
	250	80	830	1 200	114	2 000	2 600	16	* **23130 CC/W33**	* **23130 CCK/W33**
	250	100	1 020	1 530	146	1 400	2 000	20	* **24130 CC/W33**	* **24130 CCK30/W33**
	270	73	850	1 080	102	2 200	3 000	18	* **22230 CC/W33**	* **22230 CCK/W33**
	270	96	1 080	1 460	137	1 600	2 200	24,5	* **23230 CC/W33**	* **23230 CCK/W33**
	320	108	1 460	1 760	146	1 600	2 000	43,5	* **22330 CC/W33**	* **22330 CCK/W33**
160	240	60	585	880	83	2 400	3 000	9,7	* **23032 CC/W33**	* **23032 CCK/W33**
	240	80	750	1 200	114	1 700	2 400	13	* **24032 CC/W33**	* **24032 CCK30/W33**
	270	86	980	1 370	129	1 900	2 400	20,5	* **23132 CC/W33**	* **23132 CCK/W33**
	270	109	1 180	1 760	163	1 300	1 900	25	* **24132 CC/W33**	* **24132 CCK30/W33**
	290	80	1 000	1 290	118	2 000	2 800	22,5	* **22232 CC/W33**	* **22232 CCK/W33**
	290	104	1 220	1 660	153	1 500	2 200	31	* **23232 CC/W33**	* **23232 CCK/W33**
	340	114	1 600	1 960	160	1 500	1 900	52	* **22332 CC/W33**	* **22332 CCK/W33**
170	260	67	710	1 060	100	2 200	2 800	13	* **23034 CC/W33**	* **23034 CCK/W33**
	260	90	930	1 460	137	1 600	2 400	17,5	* **24034 CC/W33**	* **24034 CCK30/W33**
	280	88	1 040	1 500	137	1 800	2 400	22	* **23134 CC/W33**	* **23134 CCK/W33**
	280	109	1 220	1 860	170	1 200	1 800	27,5	* **24134 CC/W33**	* **24134 CCK30/W33**
	310	86	1 120	1 460	132	1 900	2 600	28,5	* **22234 CC/W33**	* **22234 CCK/W33**
	310	110	1 400	1 930	173	1 400	2 000	37,5	* **23234 CC/W33**	* **23234 CCK/W33**
	360	120	1 760	2 160	176	1 400	1 800	61	* **22334 CC/W33**	* **22334 CCK/W33**


* SKF Explorer bearing



Dimensions						Abutment and fillet dimensions			Calculation factors			
d	d_2 ~	D_1 ~	b	K	$r_{1,2}$ min.	d_a min.	D_a max.	r_a max.	e	Y_1	Y_2	Y_0
mm						mm			–			
140	158	190	8,3	4,5	2	149	201	2t	0,22	3	4,6	2,8
	155	185	6	3	2	149	201	2	0,3	2,3	3,4	2,2
	159	197	8,3	4,5	2,1	152	213	2	0,28	2,4	3,6	2,5
	156	193	8,3	4,5	2,1	152	213	2	0,35	1,9	2,9	1,8
	166	216	11,1	6	3	154	236	2,5	0,26	2,6	3,9	2,5
	165	212	11,1	6	3	154	236	2,5	0,33	2	3	2
	175	247	16,7	9	4	157	283	3	0,35	1,9	2,9	1,8
150	169	203	8,3	4,5	2,1	161	214	2	0,22	3	4,6	2,8
	165	197	6	3	2,1	161	214	2	0,3	2,3	3,4	2,2
	172	216	11,1	6	2,1	162	238	2	0,3	2,3	3,4	2,2
	169	211	8,3	4,5	2,1	162	238	2	0,37	1,8	2,7	1,8
	178	234	13,9	7,5	3	164	256	2,5	0,26	2,6	3,9	2,5
	175	228	11,1	6	3	164	256	2,5	0,35	1,9	2,9	1,8
	188	266	16,7	9	4	167	303	3	0,35	1,9	2,9	1,8
160	180	217	11,1	6	2,1	171	229	2	0,22	3	4,6	2,8
	176	211	8,3	4,5	2,1	171	229	2	0,3	2,3	3,4	2,2
	184	234	13,9	7,5	2,1	172	258	2	0,3	2,3	3,4	2,2
	181	228	8,3	4,5	2,1	172	258	2	0,4	1,7	2,5	1,6
	191	250	13,9	7,5	3	174	276	2,5	0,26	2,6	3,9	2,5
	188	244	13,9	7,5	3	174	276	2,5	0,35	1,9	2,9	1,8
	200	282	16,7	9	4	177	323	3	0,35	1,9	2,9	1,8
170	191	232	11,1	6	2,1	181	249	2	0,23	2,9	4,4	2,8
	188	226	8,3	4,5	2,1	181	249	2	0,33	2	3	2
	195	244	13,9	7,5	2,1	182	268	2	0,3	2,3	3,4	2,2
	190	237	8,3	4,5	2,1	182	268	2	0,37	1,8	2,7	1,8
	203	267	16,7	9	4	187	293	3	0,27	2,5	3,7	2,5
	200	261	13,9	7,5	4	187	293	3	0,35	1,9	2,9	1,8
	213	300	16,7	9	4	187	343	3	0,33	2	3	2

8.1 Spherical roller bearings


d **180 – 220** mm

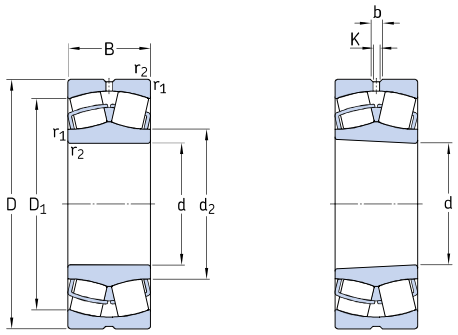

Cylindrical bore | Tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designations	
			dynamic	static		Refer-	Limit-		Bearing with	
d	D	B	C	C_0	P_u	ence speed	ing speed		cylindrical bore	tapered bore
mm			kN		kN	r/min		kg	–	
180	250	52	490	830	76,5	2 600	2 800	7,9	* **23936 CC/W33**	* **23936 CCK/W33**
	280	74	830	1 250	114	2 000	2 600	17	* **23036 CC/W33**	* **23036 CCK/W33**
	280	100	1 080	1 730	156	1 500	2 200	23	* **24036 CC/W33**	* **24036 CCK30/W33**
	300	96	1 200	1 760	160	1 700	2 200	28	* **23136 CC/W33**	* **23136 CCK/W33**
	300	118	1 400	2 160	196	1 100	1 600	34,5	* **24136 CC/W33**	* **24136 CCK30/W33**
	320	86	1 180	1 560	140	1 800	2 600	29,5	* **22236 CC/W33**	* **22236 CCK/W33**
	320	112	1 500	2 120	186	1 300	1 900	39,5	* **23236 CC/W33**	* **23236 CCK/W33**
	380	126	2 000	2 450	193	1 300	1 700	71,5	* **22336 CC/W33**	* **22336 CCK/W33**
190	260	52	475	800	76,5	2 400	2 600	8,3	* **23938 CC/W33**	* **23938 CCK/W33**
	290	75	865	1 340	122	1 900	2 400	18	* **23038 CC/W33**	* **23038 CCK/W33**
	290	100	1 120	1 800	163	1 400	2 000	24,5	* **24038 CC/W33**	* **24038 CCK30/W33**
	320	104	1 370	2 080	183	1 500	2 000	35	* **23138 CC/W33**	* **23138 CCK/W33**
	320	128	1 600	2 500	212	1 100	1 500	43	* **24138 CC/W33**	* **24138 CCK30/W33**
	340	92	1 270	1 700	150	1 700	2 400	36,5	* **22238 CC/W33**	* **22238 CCK/W33**
	340	120	1 660	2 400	208	1 300	1 800	48	* **23238 CC/W33**	* **23238 CCK/W33**
	400	132	2 120	2 650	208	1 200	1 600	82,5	* **22338 CC/W33**	* **22338 CCK/W33**
200	280	60	620	1 040	93	2 200	2 400	11,5	* **23940 CC/W33**	* **23940 CCK/W33**
	310	82	1 000	1 530	137	1 800	2 200	23,5	* **23040 CC/W33**	* **23040 CCK/W33**
	310	109	1 290	2 120	186	1 300	1 900	31	* **24040 CC/W33**	* **24040 CCK30/W33**
	340	112	1 600	2 360	204	1 500	1 900	43	* **23140 CC/W33**	* **23140 CCK/W33**
	340	140	1 800	2 800	232	1 000	1 400	53,5	* **24140 CC/W33**	* **24140 CCK30/W33**
	360	98	1 460	1 930	166	1 600	2 200	43,5	* **22240 CC/W33**	* **22240 CCK/W33**
	360	128	1 860	2 700	228	1 200	1 700	58	* **23240 CC/W33**	* **23240 CCK/W33**
	420	138	2 320	2 900	224	1 200	1 500	95	* **22340 CC/W33**	* **22340 CCK/W33**
220	300	60	630	1 080	93	2 000	2 200	12,5	* **23944 CC/W33**	* **23944 CCK/W33**
	340	90	1 220	1 860	163	1 600	2 000	30,5	* **23044 CC/W33**	* **23044 CCK/W33**
	340	118	1 560	2 600	212	1 200	1 700	40	* **24044 CC/W33**	* **24044 CCK30/W33**
	370	120	1 800	2 750	232	1 300	1 700	53,5	* **23144 CC/W33**	* **23144 CCK/W33**
	370	150	2 120	3 350	285	850	1 200	67	* **24144 CC/W33**	* **24144 CCK30/W33**
	400	108	1 760	2 360	196	1 500	2 000	60,5	* **22244 CC/W33**	* **22244 CCK/W33**
	400	144	2 360	3 450	285	1 100	1 500	81,5	* **23244 CC/W33**	* **23244 CCK/W33**
	460	145	2 700	3 450	260	1 000	1 400	120	* **22344 CC/W33**	* **22344 CCK/W33**


* SKF Explorer bearing



Dimensions						Abutment and fillet dimensions			Calculation factors			
d	d_2 ~	D_1 ~	b	K	$r_{1,2}$ min.	d_a min.	D_a max.	r_a max.	e	Y_1	Y_2	Y_0
mm						mm			–			
180	199	231	6	3	2	189	241	2	0,18	3,8	5,6	3,6
	204	249	13,9	7,5	2,1	191	269	2	0,24	2,8	4,2	2,8
	201	243	8,3	4,5	2,1	191	269	2	0,33	2	3	2
	207	259	13,9	7,5	3	194	286	2,5	0,3	2,3	3,4	2,2
	203	253	11,1	6	3	194	286	2,5	0,37	1,8	2,7	1,8
	213	278	16,7	9	4	197	303	3	0,26	2,6	3,9	2,5
	211	271	13,9	7,5	4	197	303	3	0,35	1,9	2,9	1,8
	224	317	22,3	12	4	197	363	3	0,35	1,9	2,9	1,8
190	209	240	6	3	2	199	251	2	0,16	4,2	6,3	4
	216	261	13,9	7,5	2,1	201	279	2	0,23	2,9	4,4	2,8
	210	253	8,3	4,5	2,1	201	279	2	0,31	2,2	3,3	2,2
	220	275	13,9	7,5	3	204	306	2,5	0,31	2,2	3,3	2,2
	215	268	11,1	6	3	204	306	2,5	0,4	1,7	2,5	1,6
	225	294	16,7	9	4	207	323	3	0,26	2,6	3,9	2,5
	222	287	16,7	9	4	207	323	3	0,35	1,9	2,9	1,8
	236	333	22,3	12	5	210	380	4	0,35	1,9	2,9	1,8
200	222	258	8,3	4,5	2,1	211	269	2	0,19	3,6	5,3	3,6
	228	278	13,9	7,5	2,1	211	299	2	0,24	2,8	4,2	2,8
	223	268	11,1	6	2,1	211	299	2	0,33	2	3	2
	231	293	16,7	9	3	214	326	2,5	0,31	2,2	3,3	2,2
	226	284	11,1	6	3	214	326	2,5	0,4	1,7	2,5	1,6
	238	313	16,7	9	4	217	343	3	0,26	2,6	3,9	2,5
	235	304	16,7	9	4	217	343	3	0,35	1,9	2,9	1,8
	249	351	22,3	12	5	220	400	4	0,33	2	3	2
220	241	278	8,3	4,5	2,1	231	289	2	0,16	4,2	6,3	4
	250	306	13,9	7,5	3	233	327	2,5	0,24	2,8	4,2	2,8
	244	295	11,1	6	3	233	327	2,5	0,33	2	3	2
	255	320	16,7	9	4	237	353	3	0,3	2,3	3,4	2,2
	248	310	11,1	6	4	237	353	3	0,4	1,7	2,5	1,6
	263	346	16,7	9	4	237	383	3	0,27	2,5	3,7	2,5
	259	338	16,7	9	4	237	383	3	0,35	1,9	2,9	1,8
	279	389	22,3	12	5	240	440	4	0,31	2,2	3,3	2,2

8.1 Spherical roller bearings


d **240 – 300** mm

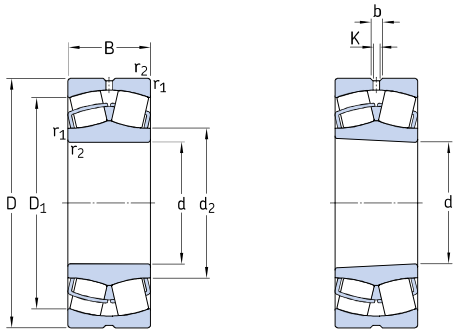

Cylindrical bore | Tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designations	
			dynamic	static		Reference	Limiting		Bearing with cylindrical bore	tapered bore
d	D	B	C	C_0	P_u	speed	speed			
mm			kN		kN	r/min		kg	–	
240	320	60	655	1 160	98	1 900	2 000	13,5	* **23948 CC/W33**	* **23948 CCK/W33**
	360	92	1 290	2 080	176	1 500	1 900	33,5	* **23048 CC/W33**	* **23048 CCK/W33**
	360	118	1 600	2 700	228	1 100	1 600	43	* **24048 CC/W33**	* **24048 CCK30/W33**
	400	128	2 080	3 200	255	1 200	1 600	66,5	* **23148 CC/W33**	* **23148 CCK/W33**
	400	160	2 400	3 900	320	750	1 100	83	* **24148 CC/W33**	* **24148 CCK30/W33**
	440	120	2 200	3 000	245	1 300	1 800	83	* **22248 CC/W33**	* **22248 CCK/W33**
	440	160	2 900	4 300	345	950	1 300	110	* **23248 CC/W33**	* **23248 CCK/W33**
	500	155	3 100	4 000	290	950	1 300	155	* **22348 CC/W33**	* **22348 CCK/W33**
260	360	75	1 000	1 800	156	1 700	1 900	23,5	* **23952 CC/W33**	* **23952 CCK/W33**
	400	104	1 600	2 550	212	1 300	1 700	48,5	* **23052 CC/W33**	* **23052 CCK/W33**
	400	140	2 040	3 450	285	1 000	1 400	65,5	* **24052 CC/W33**	* **24052 CCK30/W33**
	440	144	2 550	3 900	290	1 100	1 400	90,5	* **23152 CC/W33**	* **23152 CCK/W33**
	440	180	3 000	4 800	380	670	950	110	* **24152 CC/W33**	* **24152 CCK30/W33**
	480	130	2 650	3 550	285	1 200	1 600	110	* **22252 CC/W33**	* **22252 CCK/W33**
	480	174	3 250	4 750	360	850	1 200	140	* **23252 CC/W33**	* **23252 CCK/W33**
	540	165	3 550	4 550	325	850	1 100	190	* **22352 CC/W33**	* **22352 CCK/W33**
280	380	75	965	1 760	143	1 600	1 700	25	* **23956 CC/W33**	* **23956 CCK/W33**
	420	106	1 730	2 850	224	1 300	1 600	52,5	* **23056 CC/W33**	* **23056 CCK/W33**
	420	140	2 160	3 800	285	950	1 400	69,5	* **24056 CC/W33**	* **24056 CCK30/W33**
	460	146	2 650	4 250	335	1 000	1 300	97	* **23156 CC/W33**	* **23156 CCK/W33**
	460	180	3 100	5 100	415	630	900	120	* **24156 CC/W33**	* **24156 CCK30/W33**
	500	130	2 700	3 750	300	1 100	1 500	115	* **22256 CC/W33**	* **22256 CCK/W33**
	500	176	3 250	4 900	365	800	1 100	150	* **23256 CC/W33**	* **23256 CCK/W33**
	580	175	4 000	5 200	365	800	1 100	235	* **22356 CC/W33**	* **22356 CCK/W33**
300	420	90	1 370	2 500	200	1 400	1 600	39,5	* **23960 CC/W33**	* **23960 CCK/W33**
	460	118	2 120	3 450	265	1 200	1 500	71,5	* **23060 CC/W33**	* **23060 CCK/W33**
	460	160	2 700	4 750	355	850	1 200	97	* **24060 CC/W33**	* **24060 CCK30/W33**
	500	160	3 200	5 100	380	950	1 200	125	* **23160 CC/W33**	* **23160 CCK/W33**
	500	200	3 750	6 300	465	560	800	160	* **24160 CC/W33**	* **24160 CCK30/W33**
	540	140	3 150	4 250	325	1 000	1 400	135	* **22260 CC/W33**	* **22260 CCK/W33**
	540	192	3 900	5 850	425	750	1 000	190	* **23260 CC/W33**	* **23260 CCK/W33**


* SKF Explorer bearing



Dimensions						Abutment and fillet dimensions			Calculation factors			
d	d_2 ~	D_1 ~	b	K	$r_{1,2}$ min.	d_a min.	D_a max.	r_a max.	e	Y_1	Y_2	Y_0
mm						mm			–			
240	261	298	8,3	4,5	2,1	251	309	2	0,15	4,5	6,7	4,5
	271	326	13,9	7,5	3	253	347	2,5	0,23	2,9	4,4	2,8
	265	316	11,1	6	3	253	347	2,5	0,3	2,3	3,4	2,2
	277	348	16,7	9	4	257	383	3	0,3	2,3	3,4	2,2
	271	336	11,1	6	4	257	383	3	0,4	1,7	2,5	1,6
	290	383	22,3	12	4	257	423	3	0,27	2,5	3,7	2,5
	286	374	22,3	12	4	257	423	3	0,35	1,9	2,9	1,8
	303	423	22,3	12	5	260	480	4	0,31	2,2	3,3	2,2
260	287	331	8,3	4,5	2,1	271	349	2	0,18	3,8	5,6	3,6
	295	360	16,7	9	4	275	385	3	0,23	2,9	4,4	2,8
	289	347	11,1	6	4	275	385	3	0,33	2	3	2
	301	380	16,7	9	4	277	423	3	0,31	2,2	3,3	2,2
	293	368	13,9	7,5	4	277	423	3	0,4	1,7	2,5	1,6
	312	421	22,3	12	5	280	460	4	0,27	2,5	3,7	2,5
	312	408	22,3	12	5	280	460	4	0,35	1,9	2,9	1,8
	328	458	22,3	12	6	286	514	5	0,31	2,2	3,3	2,2
280	308	352	11,1	6	2,1	291	369	2	0,16	4,2	6,3	4
	315	380	16,7	9	4	295	405	3	0,23	2,9	4,4	2,8
	309	368	11,1	6	4	295	405	3	0,31	2,2	3,3	2,2
	321	401	16,7	9	5	300	440	4	0,3	2,3	3,4	2,2
	314	390	13,9	7,5	5	300	440	4	0,4	1,7	2,5	1,6
	333	441	22,3	12	5	300	480	4	0,26	2,6	3,9	2,5
	332	429	22,3	12	5	300	480	4	0,35	1,9	2,9	1,8
	354	492	22,3	12	6	306	554	5	0,3	2,3	3,4	2,2
300	333	385	11,1	6	3	313	407	2,5	0,19	3,6	5,3	3,6
	340	414	16,7	9	4	315	445	3	0,23	2,9	4,4	2,8
	331	400	13,9	7,5	4	315	445	3	0,33	2	3	2
	345	434	16,7	9	5	320	480	4	0,3	2,3	3,4	2,2
	338	422	13,9	7,5	5	320	480	4	0,4	1,7	2,5	1,6
	354	477	22,3	12	5	311	520	4	0,26	2,6	3,9	2,5
	356	461	22,3	12	5	320	520	4	0,35	1,9	2,9	1,8

8.1 Spherical roller bearings

d **320 – 400** mm

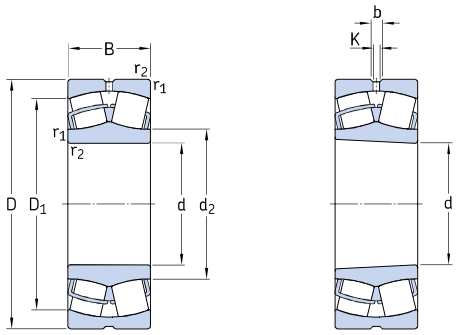


Cylindrical bore

Tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designations	
			dynamic	static		Refer-ence	Limit-ing		Bearing with cylindrical bore	tapered bore
d	D	B	C	C_0	P_u	speed	speed			
mm			kN		kN	r/min		kg	–	
320	440	90	1 430	2 700	212	1 400	1 500	42	* **23964 CC/W33**	* **23964 CCK/W33**
	480	121	2 240	3 800	285	1 100	1 400	78	* **23064 CC/W33**	* **23064 CCK/W33**
	480	160	2 850	5 100	400	800	1 200	100	* **24064 CC/W33**	* **24064 CCK30/W33**
	540	176	3 750	6 000	440	850	1 100	165	* **23164 CC/W33**	* **23164 CCK/W33**
	540	218	4 250	7 100	510	500	700	210	* **24164 CC/W33**	* **24164 CCK30/W33**
	580	150	3 600	4 900	375	950	1 300	175	* **22264 CC/W33**	* **22264 CCK/W33**
	580	208	4 400	6 700	480	700	950	240	* **23264 CC/W33**	* **23264 CCK/W33**
340	460	90	1 460	2 800	216	1 300	1 400	45,5	* **23968 CC/W33**	* **23968 CCK/W33**
	520	133	2 700	4 550	335	1 000	1 300	105	* **23068 CC/W33**	* **23068 CCK/W33**
	520	180	3 450	6 200	475	750	1 100	140	* **24068 CC/W33**	* **24068 CCK30/W33**
	580	190	4 250	6 800	480	800	1 000	210	* **23168 CC/W33**	* **23168 CCK/W33**
	580	243	5 300	8 650	630	430	630	280	* **24168 ECCJ/W33**	* **24168 ECCK30J/W33**
	620	224	5 100	7 800	550	560	800	295	* **23268 CA/W33**	* **23268 CAK/W33**
360	480	90	1 400	2 750	220	1 200	1 300	46	* **23972 CC/W33**	* **23972 CCK/W33**
	540	134	2 750	4 800	345	950	1 200	110	* **23072 CC/W33**	* **23072 CCK/W33**
	540	180	3 550	6 550	490	700	1 000	145	* **24072 CC/W33**	* **24072 CCK30/W33**
	600	192	4 300	6 950	490	750	1 000	220	* **23172 CC/W33**	* **23172 CCK/W33**
	600	243	5 600	9 300	670	400	600	280	* **24172 ECCJ/W33**	* **24172 ECCK30J/W33**
	650	170	4 300	6 200	440	630	850	255	* **22272 CA/W33**	* **22272 CAK/W33**
	650	232	5 400	8 300	570	530	750	335	* **23272 CA/W33**	* **23272 CAK/W33**
380	520	106	1 960	3 800	285	1 100	1 200	69	* **23976 CC/W33**	* **23976 CCK/W33**
	560	135	2 900	5 000	360	900	1 200	115	* **23076 CC/W33**	* **23076 CCK/W33**
	560	180	3 600	6 800	480	670	950	150	* **24076 CC/W33**	* **24076 CCK30/W33**
	620	194	4 400	7 100	500	560	1 000	230	* **23176 CA/W33**	* **23176 CAK/W33**
	620	243	5 700	9 800	710	360	530	300	* **24176 ECA/W33**	* **24176 ECAK30/W33**
	680	240	5 850	9 150	620	500	750	375	* **23276 CA/W33**	* **23276 CAK/W33**
400	540	106	2 000	3 900	290	1 100	1 200	71	* **23980 CC/W33**	* **23980 CCK/W33**
	600	148	3 400	5 850	415	850	1 100	150	* **23080 CC/W33**	* **23080 CCK/W33**
	600	200	4 300	8 000	560	630	900	205	* **24080 ECCJ/W33**	* **24080 ECCK30J/W33**
	650	200	4 650	7 650	530	530	950	265	* **23180 CA/W33**	* **23180 CAK/W33**
	650	250	6 200	10 600	735	340	500	340	* **24180 ECA/W33**	* **24180 ECAK30/W33**
	720	256	6 550	10 400	680	480	670	450	* **23280 CA/W33**	* **23280 CAK/W33**
	820	243	7 500	10 400	670	430	750	650	* **22380 CA/W33**	* **22380 CAK/W33**


* SKF Explorer bearing



Dimensions						Abutment and fillet dimensions			Calculation factors			
d	d_2 ~	D_1 ~	b	K	$r_{1,2}$ min.	d_a min.	D_a max.	r_a max.	e	Y_1	Y_2	Y_0
mm						mm			–			
320	354	406	11,1	6	3	333	427	2,5	0,17	4	5,9	4
	360	434	16,7	9	4	335	465	3	0,23	2,9	4,4	2,8
	354	423	13,9	7,5	4	335	465	3	0,31	2,2	3,3	2,2
	370	465	22,3	12	5	340	520	4	0,31	2,2	3,3	2,2
	364	455	16,7	9	5	340	520	4	0,4	1,7	2,5	1,6
	379	513	22,3	12	5	340	560	4	0,26	2,6	3,9	2,5
	382	493	22,3	12	5	340	560	4	0,35	1,9	2,9	1,8
340	373	426	11,1	6	3	353	447	2,5	0,17	4	5,9	4
	385	468	22,3	12	5	358	502	4	0,24	2,8	4,2	2,8
	377	453	16,7	9	5	358	502	4	0,33	2	3	2
	394	498	22,3	12	5	360	560	4	0,31	2,2	3,3	2,2
	383	491	16,7	9	5	360	560	4	0,4	1,7	2,5	1,6
	427	528	22,3	12	6	366	594	5	0,35	1,9	2,9	1,8
360	394	447	11,1	6	3	373	467	2,5	0,15	4,5	6,7	4,5
	404	483	22,3	12	5	378	522	4	0,23	2,9	4,4	2,8
	397	474	16,7	9	5	378	522	4	0,31	2,2	3,3	2,2
	418	524	22,3	12	5	380	580	4	0,3	2,3	3,4	2,2
	404	511	16,7	9	5	380	580	4	0,4	1,7	2,5	1,6
	454	568	22,3	12	6	386	624	5	0,26	2,6	3,9	2,5
	449	552	22,3	12	6	386	624	5	0,35	1,9	2,9	1,8
380	419	481	13,9	7,5	4	395	505	3	0,17	4	5,9	4
	426	509	22,3	12	5	398	542	4	0,22	3	4,6	2,8
	419	497	16,7	9	5	398	542	4	0,3	2,3	3,4	2,2
	454	541	22,3	12	5	400	600	4	0,3	2,3	3,4	2,2
	444	532	16,7	9	5	400	600	4	0,37	1,8	2,7	1,8
	473	581	22,3	12	6	406	654	5	0,35	1,9	2,9	1,8
400	439	500	13,9	7,5	4	415	525	3	0,16	4,2	6,3	4
	450	543	22,3	12	5	418	582	4	0,23	2,9	4,4	2,8
	442	527	22,3	12	5	418	582	4	0,3	2,3	3,4	2,2
	475	566	22,3	12	6	426	624	5	0,28	2,4	3,6	2,5
	467	559	22,3	12	6	426	624	5	0,37	1,8	2,7	1,8
	500	615	22,3	12	6	426	694	5	0,35	1,9	2,9	1,8
	534	697	22,3	12	7,5	432	788	6	0,3	2,3	3,4	2,2

8.1 Spherical roller bearings


d **420 – 500** mm

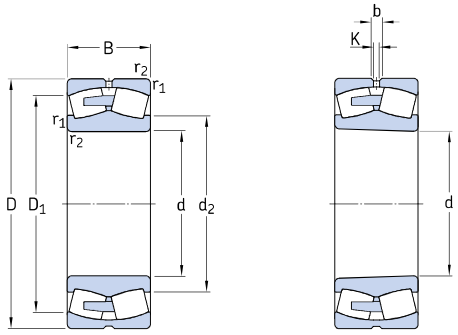

Cylindrical bore | Tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designations	
			dynamic	static		Reference	Limiting		Bearing with cylindrical bore	tapered bore
d	D	B	C	C_0	P_u	speed	speed			
mm			kN		kN	r/min		kg	–	
420	560	106	2 040	4 150	300	1 000	1 100	74,5	* **23984 CC/W33**	* **23984 CCK/W33**
	620	150	3 400	6 000	415	600	1 100	155	* **23084 CA/W33**	* **23084 CAK/W33**
	620	200	4 400	8 300	585	530	900	210	* **24084 ECA/W33**	* **24084 ECAK30/W33**
	700	224	5 600	9 300	620	480	900	350	* **23184 CJ/W33**	* **23184 CKJ/W33**
	700	280	7 350	12 600	850	320	480	445	* **24184 ECA/W33**	* **24184 ECAK30/W33**
	760	272	7 350	11 600	765	450	630	535	* **23284 CA/W33**	* **23284 CAK/W33**
440	600	118	2 450	4 900	345	950	1 000	99,5	* **23988 CC/W33**	* **23988 CCK/W33**
	650	157	3 650	6 550	450	560	1 000	180	* **23088 CA/W33**	* **23088 CAK/W33**
	650	212	4 800	9 150	630	500	850	245	* **24088 ECA/W33**	* **24088 ECAK30/W33**
	720	226	6 000	10 000	670	450	850	360	* **23188 CA/W33**	* **23188 CAK/W33**
	720	280	7 500	13 200	900	300	450	460	* **24188 ECA/W33**	* **24188 ECAK30/W33**
	790	280	7 800	12 500	800	430	600	590	* **23288 CA/W33**	* **23288 CAK/W33**
460	580	118	2 080	4 900	345	630	1 100	75,5	* **24892 CAMA/W20**	* **24892 CAK30MA/W20**
	620	118	2 500	5 000	355	600	1 000	105	* **23992 CA/W33**	* **23992 CAK/W33**
	680	163	3 900	6 950	465	560	950	205	* **23092 CA/W33**	* **23092 CAK/W33**
	680	218	5 200	10 000	670	480	800	275	* **24092 ECA/W33**	* **24092 ECAK30/W33**
	760	240	6 400	10 800	680	430	800	440	* **23192 CA/W33**	* **23192 CAK/W33**
	760	300	8 300	14 600	1 000	280	430	560	* **24192 ECA/W33**	* **24192 ECAK30/W33**
	830	296	8 500	13 700	880	400	560	695	* **23292 CA/W33**	* **23292 CAK/W33**
480	650	128	2 900	5 700	405	560	1 000	125	* **23996 CA/W33**	* **23996 CAK/W33**
	700	165	3 900	6 800	450	530	950	215	* **23096 CA/W33**	* **23096 CAK/W33**
	700	218	5 300	10 400	695	450	750	285	* **24096 ECA/W33**	* **24096 ECAK30/W33**
	790	248	6 950	12 000	780	400	750	485	* **23196 CA/W33**	* **23196 CAK/W33**
	790	308	9 000	15 600	1 040	260	400	605	* **24196 ECA/W33**	* **24196 ECAK30/W33**
	870	310	9 300	15 000	950	380	530	800	* **23296 CA/W33**	* **23296 CAK/W33**
500	670	128	2 900	6 000	415	530	950	130	* **239/500 CA/W33**	* **239/500 CAK/W33**
	720	167	4 150	7 800	510	500	900	225	* **230/500 CA/W33**	* **230/500 CAK/W33**
	720	218	5 500	11 000	735	430	700	295	* **240/500 ECA/W33**	* **240/500 ECAK30/W33**
	830	264	7 650	12 900	830	380	700	580	* **231/500 CA/W33**	* **231/500 CAK/W33**
	830	325	9 800	17 000	1 120	260	380	700	* **241/500 ECA/W33**	* **241/500 ECAK30/W33**
	920	336	10 600	17 300	1 060	360	500	985	* **232/500 CA/W33**	* **232/500 CAK/W33**


* SKF Explorer bearing



Dimensions						Abutment and fillet dimensions			Calculation factors			
d	d_2 ~	D_1 ~	b	K	$r_{1,2}$ min.	d_a min.	D_a max.	r_a max.	e	Y_1	Y_2	Y_0
mm						mm			–			
420	459	520	16,7	9	4	435	545	3	0,16	4,2	6,3	4
	487	563	22,3	12	5	438	602	4	0,22	3	4,6	2,8
	477	547	22,3	12	5	438	602	4	0,3	2,3	3,4	2,2
	483	607	22,3	12	6	446	674	5	0,3	2,3	3,4	2,2
	494	597	22,3	12	6	446	674	5	0,4	1,7	2,5	1,6
	526	649	22,3	12	7,5	452	728	6	0,35	1,9	2,9	1,8
440	484	553	16,7	9	4	455	585	3	0,16	4,2	6,3	4
	511	590	22,3	12	6	463	627	5	0,22	3	4,6	2,8
	499	572	22,3	12	6	463	627	5	0,3	2,3	3,4	2,2
	529	632	22,3	12	6	466	694	5	0,3	2,3	3,4	2,2
	516	618	22,3	12	6	466	694	5	0,37	1,8	2,7	1,8
	549	676	22,3	12	7,5	472	758	6	0,35	1,9	2,9	1,8
460	505	541	–	7,5	3	473	567	2,5	0,17	4	5,9	4
	516	574	16,7	9	4	475	605	3	0,16	4,2	6,3	4
	533	617	22,3	12	6	483	657	5	0,22	3	4,6	2,8
	524	601	22,3	12	6	483	657	5	0,28	2,4	3,6	2,5
	555	666	22,3	12	7,5	492	728	6	0,3	2,3	3,4	2,2
	543	649	22,3	12	7,5	492	728	6	0,37	1,8	2,7	1,8
	574	706	22,3	12	7,5	492	798	6	0,35	1,9	2,9	1,8
480	537	602	16,7	9	5	498	632	4	0,18	3,8	5,6	3,6
	549	633	22,3	12	6	503	677	5	0,21	3,2	4,8	3,2
	542	619	22,3	12	6	503	677	5	0,28	2,4	3,6	2,5
	579	692	22,3	12	7,5	512	758	6	0,3	2,3	3,4	2,2
	564	678	22,3	12	7,5	512	758	6	0,37	1,8	2,7	1,8
	602	741	22,3	12	7,5	512	838	6	0,35	1,9	2,9	1,8
500	561	622	22,3	12	5	518	652	4	0,17	4	5,9	4
	573	658	22,3	12	6	523	697	5	0,21	3,2	4,8	3,2
	566	644	22,3	12	6	523	697	5	0,26	2,6	3,9	2,5
	605	726	22,3	12	7,5	532	798	6	0,3	2,3	3,4	2,2
	588	713	22,3	12	7,5	532	798	6	0,37	1,8	2,7	1,8
	633	779	22,3	12	7,5	532	888	6	0,35	1,9	2,9	1,8

8.1 Spherical roller bearings


d **530 – 670** mm

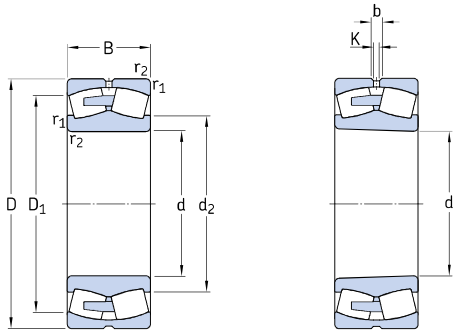

Cylindrical bore | Tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designations	
			dynamic	static		Reference	Limiting		Bearing with	
d	D	B	C	C_0	P_u	speed	speed		cylindrical bore	tapered bore
mm			kN		kN	r/min		kg	–	
530	650	118	2 120	5 300	380	530	950	86	* **248/530 CAMA/W20**	* **248/530 CAK30MA/W20**
	710	136	3 200	6 700	480	500	900	155	* **239/530 CA/W33**	* **239/530 CAK/W33**
	780	185	5 100	9 300	630	450	800	310	* **230/530 CA/W33**	* **230/530 CAK/W33**
	780	250	6 700	13 200	830	400	670	410	* **240/530 ECA/W33**	* **240/530 ECAK30/W33**
	870	272	8 150	14 000	915	360	670	645	* **231/530 CA/W33**	* **231/530 CAK/W33**
	870	335	10 600	19 000	1 220	240	360	830	* **241/530 ECA/W33**	* **241/530 ECAK30/W33**
	980	355	12 700	20 400	1 220	320	480	1 200	* **232/530 CA/W33**	* **232/530 CAK/W33**
560	750	140	3 450	7 200	510	450	850	175	* **239/560 CA/W33**	* **239/560 CAK/W33**
	820	195	5 600	10 200	680	430	750	355	* **230/560 CA/W33**	* **230/560 CAK/W33**
	820	258	7 350	14 600	960	380	630	465	* **240/560 ECA/W33**	* **240/560 ECAK30/W33**
	920	280	9 150	16 000	980	340	630	740	* **231/560 CA/W33**	* **231/560 CAK/W33**
	920	355	12 000	21 600	1 340	220	320	985	* **241/560 ECJ/W33**	* **241/560 ECK30J/W33**
	1 030	365	13 400	22 000	1 320	280	430	1 350	* **232/560 CA/W33**	* **232/560 CAK/W33**
600	800	150	3 900	8 300	585	430	750	220	* **239/600 CA/W33**	* **239/600 CAK/W33**
	870	200	6 000	11 400	750	400	700	405	* **230/600 CA/W33**	* **230/600 CAK/W33**
	870	272	8 150	17 000	1 100	340	560	520	* **240/600 ECA/W33**	* **240/600 ECAK30/W33**
	980	300	10 200	18 000	1 100	320	560	895	* **231/600 CA/W33**	* **231/600 CAK/W33**
	980	375	13 200	23 600	1 460	200	300	1 200	* **241/600 ECA/W33**	* **241/600 ECAK30/W33**
	1 090	388	15 000	25 500	1 460	260	400	1 600	* **232/600 CA/W33**	* **232/600 CAK/W33**
630	780	112	2 500	6 100	415	430	750	120	* **238/630 CAMA/W20**	* **238/630 CAKMA/W20**
	850	165	4 650	9 800	640	400	700	280	* **239/630 CA/W33**	* **239/630 CAK/W33**
	920	212	6 700	12 500	800	380	670	485	* **230/630 CA/W33**	* **230/630 CAK/W33**
	920	290	8 800	18 000	1 140	320	530	645	* **240/630 ECJ/W33**	* **240/630 ECK30J/W33**
	1 030	315	12 000	20 800	1 220	260	530	1 050	* **231/630 CA/W33**	* **231/630 CAK/W33**
	1 030	400	14 600	27 000	1 630	190	280	1 400	* **241/630 ECA/W33**	* **241/630 ECAK30/W33**
670	820	112	2 600	6 400	430	400	700	130	* **238/670 CAMA/W20**	* **238/670 CAKMA/W20**
	900	170	5 000	10 800	695	360	670	315	* **239/670 CA/W33**	* **239/670 CAK/W33**
	980	230	7 650	14 600	915	340	600	600	* **230/670 CA/W33**	* **230/670 CAK/W33**
	980	308	10 000	20 400	1 320	300	500	790	* **240/670 ECA/W33**	* **240/670 ECAK30/W33**
	1 090	336	12 500	22 400	1 320	240	500	1 250	* **231/670 CA/W33**	* **231/670 CAK/W33**
	1 090	412	16 000	29 000	1 760	180	260	1 600	* **241/670 ECA/W33**	* **241/670 ECAK30/W33**
	1 220	438	18 000	30 500	1 700	220	360	2 270	* **232/670 CA/W33**	* **232/670 CAK/W33**


* SKF Explorer bearing



Dimensions						Abutment and fillet dimensions			Calculation factors			
d	d_2 ~	D_1 ~	b	K	$r_{1,2}$ min.	d_a min.	D_a max.	r_a max.	e	Y_1	Y_2	Y_0
mm						mm			–			
530	573	612	–	7,5	3	543	637	2,5	0,15	4,5	6,7	4,5
	594	661	22,3	12	5	548	692	4	0,17	4	5,9	4
	613	710	22,3	12	6	553	757	5	0,22	3	4,6	2,8
	601	687	22,3	12	6	553	757	5	0,28	2,4	3,6	2,5
	638	763	22,3	12	7,5	562	838	6	0,3	2,3	3,4	2,2
	623	748	22,3	12	7,5	562	838	6	0,37	1,8	2,7	1,8
	670	836	22,3	12	9,5	570	940	8	0,35	1,9	2,9	1,8
560	627	697	22,3	12	5	578	732	4	0,16	4,2	6,3	4
	646	746	22,3	12	6	583	797	5	0,22	3	4,6	2,8
	637	728	22,3	12	6	583	797	5	0,28	2,4	3,6	2,5
	675	809	22,3	12	7,5	592	888	6	0,3	2,3	3,4	2,2
	634	796	22,3	12	7,5	592	888	6	0,35	1,9	2,9	1,8
	706	878	22,3	12	9,5	600	990	8	0,35	1,9	2,9	1,8
600	671	744	22,3	12	5	618	782	4	0,17	4	5,9	4
	685	789	22,3	12	6	623	847	5	0,22	3	4,6	2,8
	675	774	22,3	12	6	623	847	5	0,3	2,3	3,4	2,2
	722	863	22,3	12	7,5	632	948	6	0,3	2,3	3,4	2,2
	702	845	22,3	12	7,5	632	948	6	0,37	1,8	2,7	1,8
	754	929	22,3	12	9,5	640	1 050	8	0,35	1,9	2,9	1,8
630	682	738	–	9	4	645	765	3	0,12	5,6	8,4	5,6
	708	787	22,3	12	6	653	827	5	0,17	4	5,9	4
	727	839	22,3	12	7,5	658	892	6	0,21	3,2	4,8	3,2
	697	823	22,3	12	7,5	658	892	6	0,28	2,4	3,6	2,5
	755	918	22,3	12	7,5	662	998	6	0,3	2,3	3,4	2,2
	738	885	22,3	12	7,5	662	998	6	0,37	1,8	2,7	1,8
670	724	778	–	9	4	685	805	3	0,11	6,1	9,1	6,3
	752	835	22,3	12	6	693	877	5	0,17	4	5,9	4
	772	892	22,3	12	7,5	698	952	6	0,21	3,2	4,8	3,2
	758	866	22,3	12	7,5	698	952	6	0,28	2,4	3,6	2,5
	804	959	22,3	12	7,5	702	1 058	6	0,3	2,3	3,4	2,2
	782	942	22,3	12	7,5	702	1 058	6	0,37	1,8	2,7	1,8
	832	1 028	22,3	12	12	718	1 172	10	0,35	1,9	2,9	1,8

8.1 Spherical roller bearings


d **710 – 850** mm

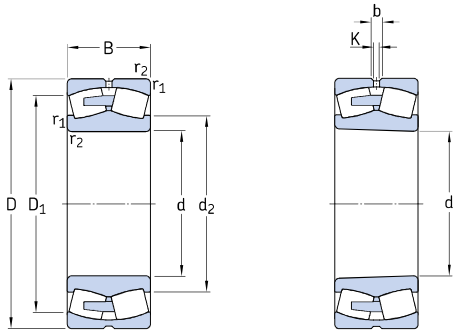

Cylindrical bore | Tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designations	
			dynamic	static		Reference	Limiting		Bearing with	
d	D	B	C	C_0	P_u	speed	speed		cylindrical bore	tapered bore
mm			kN		kN	r/min		kg	–	
710	870	118	3 000	7 500	500	360	670	153	* **238/710 CAMA/W20**	* **238/710 CAKMA/W20**
	950	180	5 600	12 000	765	340	600	365	* **239/710 CA/W33**	* **239/710 CAK/W33**
	950	243	6 800	15 600	930	300	500	495	* **249/710 CA/W33**	* **249/710 CAK30/W33**
	1 030	236	8 300	16 300	1 000	300	560	670	* **230/710 CA/W33**	* **230/710 CAK/W33**
	1 030	315	10 600	22 800	1 370	260	450	895	* **240/710 ECA/W33**	* **240/710 ECAK30/W33**
	1 150	345	14 000	26 000	1 530	240	450	1 450	* **231/710 CA/W33**	* **231/710 CAK/W33**
	1 150	438	17 300	32 500	1 900	160	240	1 900	* **241/710 ECA/W33**	* **241/710 ECAK30/W33**
	1 280	450	20 400	34 500	2 000	200	320	2 610	* **232/710 CA/W33**	* **232/710 CAK/W33**
750	920	128	3 350	8 500	550	340	600	185	* **238/750 CAMA/W20**	* **238/750 CAKMA/W20**
	1 000	185	6 000	13 200	815	320	560	420	* **239/750 CA/W33**	* **239/750 CAK/W33**
	1 000	250	7 650	18 000	1 100	280	480	560	* **249/750 CA/W33**	* **249/750 CAK30/W33**
	1 090	250	9 650	18 600	1 100	280	530	795	* **230/750 CA/W33**	* **230/750 CAK/W33**
	1 090	335	11 800	25 000	1 460	240	430	1 070	* **240/750 ECA/W33**	* **240/750 ECAK30/W33**
	1 220	365	15 600	29 000	1 700	220	430	1 700	* **231/750 CA/W33**	* **231/750 CAK/W33**
	1 220	475	20 000	37 500	2 160	150	220	2 100	* **241/750 ECA/W33**	* **241/750 ECAK30/W33**
	1 360	475	21 600	36 500	2 000	190	300	3 050	* **232/750 CAF/W33**	* **232/750 CAKF/W33**
800	980	180	4 750	12 900	830	320	560	300	* **248/800 CAMA/W20**	* **248/800 CAK30MA/W20**
	1 060	195	6 400	14 300	880	280	530	470	* **239/800 CA/W33**	* **239/800 CAK/W33**
	1 060	258	8 000	19 300	1 060	240	430	640	* **249/800 CA/W33**	* **249/800 CAK30/W33**
	1 150	258	10 000	20 000	1 160	260	480	895	* **230/800 CA/W33**	* **230/800 CAK/W33**
	1 150	345	12 900	28 500	1 730	220	400	1 200	* **240/800 ECA/W33**	* **240/800 ECAK30/W33**
	1 280	375	17 300	31 500	1 800	200	400	1 920	* **231/800 CA/W33**	* **231/800 CAK/W33**
	1 280	475	20 800	40 500	2 320	140	200	2 300	* **241/800 ECA/W33**	* **241/800 ECAK30/W33**
	1 420	488	24 000	43 000	2 360	180	280	3 280	* **232/800 CAF/W33**	* **232/800 CAKF/W33**
850	1 030	136	3 800	10 000	630	260	530	240	* **238/850 CAMA/W20**	* **238/850 CAKMA/W20**
	1 120	200	6 950	15 600	930	260	480	560	* **239/850 CA/W33**	* **239/850 CAK/W33**
	1 120	272	9 300	22 800	1 370	220	400	740	* **249/850 CA/W33**	* **249/850 CAK30/W33**
	1 220	272	10 800	21 600	1 250	240	450	1 050	* **230/850 CA/W33**	* **230/850 CAK/W33**
	1 220	365	14 600	31 500	1 900	200	360	1 410	* **240/850 ECA/W33**	* **240/850 ECAK30/W33**
	1 360	400	18 300	34 500	1 900	180	360	2 200	* **231/850 CA/W33**	* **231/850 CAK/W33**
	1 360	500	23 200	45 000	2 500	130	190	2 770	* **241/850 ECAF/W33**	* **241/850 ECAK30F/W33**


* SKF Explorer bearing



Dimensions						Abutment and fillet dimensions			Calculation factors			
d	d_2 ~	D_1 ~	b	K	$r_{1,2}$ min.	d_a min.	D_a max.	r_a max.	e	Y_1	Y_2	Y_0
mm						mm			–			
710	766	826	–	12	4	725	855	3	0,11	6,1	9,1	6,3
	794	882	22,3	12	6	733	927	5	0,17	4	5,9	4
	792	868	22,3	12	6	733	927	5	0,22	3	4,6	2,8
	816	941	22,3	12	7,5	738	1 002	6	0,21	3,2	4,8	3,2
	809	918	22,3	12	7,5	738	1 002	6	0,27	2,5	3,7	2,5
	851	1 017	22,3	12	9,5	750	1 110	8	0,28	2,4	3,6	2,5
	826	989	22,3	12	9,5	750	1 110	8	0,37	1,8	2,7	1,8
	875	1 097	22,3	12	12	758	1 232	10	0,35	1,9	2,9	1,8
750	812	873	–	12	5	768	902	4	0,11	6,1	9,1	6,3
	838	930	22,3	12	6	773	977	5	0,16	4,2	6,3	4
	830	916	22,3	12	6	773	977	5	0,22	3	4,6	2,8
	859	998	22,3	12	7,5	778	1 062	6	0,21	3,2	4,8	3,2
	855	970	22,3	12	7,5	778	1 062	6	0,28	2,4	3,6	2,5
	900	1 080	22,3	12	9,5	790	1 180	8	0,28	2,4	3,6	2,5
	875	1 050	22,3	12	9,5	790	1 180	8	0,37	1,8	2,7	1,8
	938	1 163	22,3	12	15	808	1 302	12	0,35	1,9	2,9	1,8
800	865	921	–	12	5	818	962	4	0,15	4,5	6,7	4,5
	891	986	22,3	12	6	823	1 037	5	0,16	4,2	6,3	4
	887	973	22,3	12	6	823	1 037	5	0,21	3,2	4,8	3,2
	917	1 053	22,3	12	7,5	828	1 122	6	0,2	3,4	5	3,2
	910	1 028	22,3	12	7,5	828	1 122	6	0,27	2,5	3,7	2,5
	949	1 141	22,3	12	9,5	840	1 240	8	0,28	2,4	3,6	2,5
	930	1 111	22,3	12	9,5	840	1 240	8	0,35	1,9	2,9	1,8
	995	1 238	22,3	12	15	858	1 362	12	0,33	2	3	2
850	912	981	–	12	5	868	1 012	4	0,11	6,1	9,1	6,3
	946	1 046	22,3	12	6	873	1 097	5	0,16	4,2	6,3	4
	940	1 029	22,3	12	6	873	1 097	5	0,22	3	4,6	2,8
	972	1 117	22,3	12	7,5	878	1 192	6	0,2	3,4	5	3,2
	957	1 088	22,3	12	7,5	878	1 192	6	0,27	2,5	3,7	2,5
	1 013	1 205	22,3	12	12	898	1 312	10	0,28	2,4	3,6	2,5
	988	1 182	22,3	12	12	898	1 312	10	0,35	1,9	2,9	1,8

8.1 Spherical roller bearings


d **900 – 1 250** mm

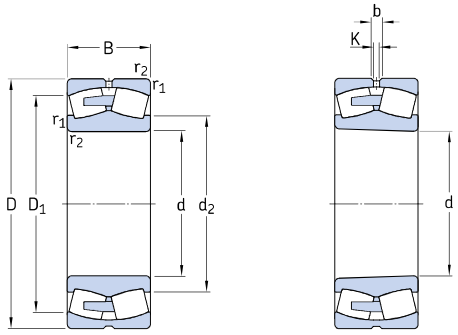

Cylindrical bore | Tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designations	
			dynamic	static		Reference	Limiting		Bearing with	
d	D	B	C	C_0	P_u	speed	speed		cylindrical bore	tapered bore
mm			kN		kN	r/min		kg	–	
900	1 090	190	5 400	15 300	950	240	480	370	* **248/900 CAMA/W20**	* **248/900 CAK30MA/W20**
	1 180	206	7 500	17 000	1 020	240	450	605	* **239/900 CA/W33**	* **239/900 CAK/W33**
	1 280	280	11 600	23 200	1 320	220	400	1 200	* **230/900 CA/W33**	* **230/900 CAK/W33**
	1 280	375	15 600	34 500	2 040	190	340	1 570	* **240/900 ECA/W33**	* **240/900 ECAK30/W33**
	1 420	515	24 500	49 000	2 700	120	180	3 350	* **241/900 ECAF/W33**	* **241/900 ECAK30F/W33**
950	1 250	224	8 300	19 600	1 120	220	430	755	* **239/950 CA/W33**	* **239/950 CAK/W33**
	1 250	300	10 600	26 000	1 500	180	340	1 020	* **249/950 CA/W33**	* **249/950 CAK30/W33**
	1 360	300	13 700	28 500	1 600	200	380	1 450	* **230/950 CA/W33**	* **230/950 CAK/W33**
	1 360	412	17 000	39 000	2 240	170	300	1 990	* **240/950 CAF/W33**	* **240/950 CAK30F/W33**
	1 500	545	27 000	55 000	3 000	110	160	3 540	* **241/950 ECAF/W33**	* **241/950 ECAK30F/W33**
1 000	1 220	165	5 400	14 300	850	220	400	410	* **238/1000 CAMA/W20**	* **238/1000 CAKMA/W20**
	1 320	315	11 800	29 000	1 460	170	320	1 200	* **249/1000 CA/W33**	* **249/1000 CAK30/W33**
	1 420	308	14 600	30 500	1 700	180	360	1 600	* **230/1000 CAF/W33**	* **230/1000 CAKF/W33**
	1 420	412	17 600	40 500	2 240	160	280	2 140	* **240/1000 CAF/W33**	* **240/1000 CAK30F/W33**
	1 580	462	24 500	48 000	2 550	140	280	3 500	* **231/1000 CAF/W33**	* **231/1000 CAKF/W33**
	1 580	580	30 500	62 000	3 350	100	150	4 300	* **241/1000 ECAF/W33**	* **241/1000 ECAK30F/W33**
1 060	1 280	165	5 500	15 000	865	200	380	435	* **238/1060 CAMA/W20**	* **238/1060 CAKMA/W20**
	1 280	218	6 950	20 000	1 200	200	380	570	* **248/1060 CAMA/W20**	* **248/1060 CAK30MA/W20**
	1 400	250	11 000	26 000	1 430	180	360	1 100	* **239/1060 CAF/W33**	* **239/1060 CAKF/W33**
	1 400	335	13 200	32 500	1 800	160	280	1 400	* **249/1060 CAF/W33**	* **249/1060 CAK30F/W33**
	1 500	325	16 000	34 000	1 830	170	320	1 840	* **230/1060 CAF/W33**	* **230/1060 CAKF/W33**
	1 500	438	20 000	45 500	2 450	150	260	2 520	* **240/1060 CAF/W33**	* **240/1060 CAK30F/W33**
1 120	1 360	243	8 300	24 000	1 400	180	340	735	* **248/1120 CAFA/W20**	* **248/1120 CAK30FA/W20**
	1 460	335	13 700	34 500	1 830	140	260	1 500	* **249/1120 CAF/W33**	* **249/1120 CAK30F/W33**
	1 580	462	21 200	50 000	2 700	130	240	2 930	* **240/1120 CAF/W33**	* **240/1120 CAK30F/W33**
1 180	1 420	180	6 700	18 600	1 080	170	320	575	* **238/1180 CAFA/W20**	* **238/1180 CAKFA/W20**
	1 420	243	8 800	27 000	1 560	170	320	770	* **248/1180 CAFA/W20**	* **248/1180 CAK30FA/W20**
	1 540	272	12 700	31 000	1 660	150	300	1 400	* **239/1180 CAF/W33**	* **239/1180 CAKF/W33**
	1 540	355	15 600	40 500	2 160	130	240	1 800	* **249/1180 CAF/W33**	* **249/1180 CAK30F/W33**
	1 660	475	24 500	58 500	3 050	130	220	3 320	* **240/1180 CAF/W33**	* **240/1180 CAK30F/W33**
1 250	1 750	375	20 400	45 000	2 320	130	240	2 840	* **230/1250 CAF/W33**	* **230/1250 CAKF/W33**


* SKF Explorer bearing



Dimensions						Abutment and fillet dimensions			Calculation factors			
d	d_2 ~	D_1 ~	b	K	$r_{1,2}$ min.	d_a min.	D_a max.	r_a max.	e	Y_1	Y_2	Y_0
mm						mm			–			
900	969	1 029	–	12	5	918	1 072	4	0,14	4,8	7,2	4,5
	996	1 101	22,3	12	6	923	1 157	5	0,15	4,5	6,7	4,5
	1 025	1 176	22,3	12	7,5	928	1 252	6	0,2	3,4	5	3,2
	1 015	1 149	22,3	12	7,5	928	1 252	6	0,26	2,6	3,9	2,5
	1 043	1 235	22,3	12	12	948	1 372	10	0,35	1,9	2,9	1,8
950	1 056	1 164	22,3	12	7,5	978	1 222	6	0,15	4,5	6,7	4,5
	1 051	1 150	22,3	12	7,5	978	1 222	6	0,21	3,2	4,8	3,2
	1 086	1 246	22,3	12	7,5	978	1 332	6	0,2	3,4	5	3,2
	1 077	1 214	22,3	12	7,5	978	1 332	6	0,27	2,5	3,7	2,5
	1 102	1 305	22,3	12	12	998	1 452	10	0,35	1,9	2,9	1,8
1 000	1 079	1 161	–	12	6	1 023	1 197	5	0,12	5,6	8,4	5,6
	1 109	1 212	22,3	12	7,5	1 028	1 292	6	0,21	3,2	4,8	3,2
	1 139	1 305	22,3	12	7,5	1 028	1 392	6	0,19	3,6	5,3	3,6
	1 136	1 278	22,3	12	7,5	1 028	1 392	6	0,26	2,6	3,9	2,5
	1 185	1 403	22,3	12	12	1 048	1 532	10	0,28	2,4	3,6	2,5
	1 159	1 373	22,3	12	12	1 048	1 532	10	0,35	1,9	2,9	1,8
1 060	1 137	1 219	–	12	6	1 083	1 257	5	0,11	6,1	9,1	6,3
	1 139	1 210	–	12	6	1 083	1 257	5	0,14	4,8	7,2	4,5
	1 171	1 305	22,3	12	7,5	1 088	1 372	6	0,16	4,2	6,3	4
	1 168	1 286	22,3	12	7,5	1 088	1 372	6	0,21	3,2	4,8	3,2
	1 205	1 378	22,3	12	9,5	1 094	1 466	8	0,19	3,6	5,3	3,6
	1 199	1 349	22,3	12	9,5	1 094	1 466	8	0,26	2,6	3,9	2,5
1 120	1 207	1 282	–	12	6	1 143	1 337	5	0,15	4,5	6,7	4,5
	1 231	1 350	22,3	12	7,5	1 148	1 432	6	0,2	3,4	5	3,2
	1 268	1 423	22,3	12	9,5	1 154	1 546	8	0,26	2,6	3,9	2,5
1 180	1 264	1 355	–	12	6	1 203	1 397	5	0,11	6,1	9,1	6,3
	1 268	1 344	–	12	6	1 203	1 397	5	0,14	4,8	7,2	4,5
	1 305	1 439	22,3	12	7,5	1 208	1 512	6	0,16	4,2	6,3	4
	1 297	1 422	22,3	12	7,5	1 208	1 512	6	0,2	3,4	5	3,2
	1 325	1 507	22,3	12	9,5	1 200	1 626	8	0,26	2,6	3,9	2,5
1 250	1 415	1 611	22,3	12	9,5	1 284	1 716	8	0,19	3,6	5,3	3,6

8.1 Spherical roller bearings


d **1 320 – 1 800** mm

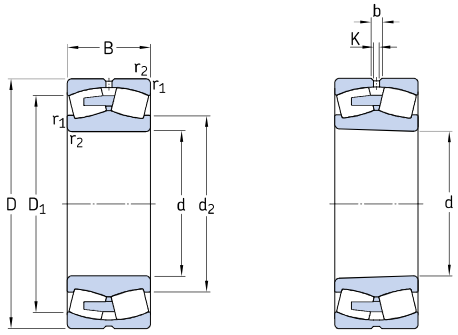

Cylindrical bore Tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designations	
			dynamic	static		Refer-	Limit-		Bearing with	
d	D	B	C	C_0	P_u	ence speed	ing speed		cylindrical bore	tapered bore
mm			kN		kN	r/min		kg	–	
1 320	1 600	280	11 200	33 500	1 860	140	260	1 160	* **248/1320 CAFA/W20**	* **248/1320 CAK30FA/W20**
	1 720	400	18 600	49 000	2 500	110	200	2 500	* **249/1320 CAF/W33**	* **249/1320 CAK30F/W33**
1 500	1 820	315	14 600	45 000	2 400	110	220	1 710	* **248/1500 CAFA/W20**	* **248/1500 CAK30FA/W20**
1 800	2 180	375	20 000	63 000	3 050	75	140	2 900	* **248/1800 CAFA/W20**	* **248/1800 CAK30FA/W20**


* SKF Explorer bearing



Dimensions						Abutment and fillet dimensions			Calculation factors			
d	d_2 ~	D_1 ~	b	K	$r_{1,2}$ min.	d_a min.	D_a max.	r_a max.	e	Y_1	Y_2	Y_0
mm						mm			–			
1 320	1 422	1 511	–	12	6	1 343	1 577	5	0,15	4,5	6,7	4,5
	1 449	1 589	22,3	12	7,5	1 348	1 692	6	0,21	3,2	4,8	3,2
1 500	1 612	1 719	–	12	7,5	1 528	1 792	6	0,15	4,5	6,7	4,5
1 800	1 932	2 060	–	12	9,5	1 834	2 146	8	0,15	4,5	6,7	4,5

8.2 Sealed spherical roller bearings


d **25 – 90** mm

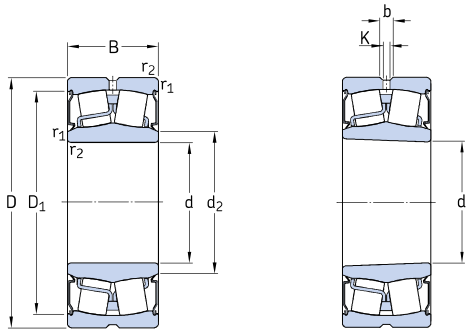

Cylindrical bore Tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit	Limiting speed	Mass	Designations Bearing with	
			dynamic	static				cylindrical bore	tapered bore
d	D	B	C	C_0	P_u				
mm			kN		kN	r/min	kg	–	
25	52	23	49	44	4,75	3 600	0,26	* **BS2-2205-2CS/VT143**	–
30	62	25	64	60	6,4	2 800	0,34	* **BS2-2206-2CS/VT143**	–
35	72	28	86,5	85	9,3	2 400	0,52	* **BS2-2207-2CS/VT143**	–
40	80	28	96,5	90	9,8	2 200	0,57	* **BS2-2208-2CS/VT143**	* **BS2-2208-2CSK/VT143**
	90	38	150	140	15	1 900	1,2	* **BS2-2308-2CS/VT143**	–
45	85	28	102	98	10,8	2 000	0,66	* **BS2-2209-2CS/VT143**	* **BS2-2209-2CSK/VT143**
	100	42	183	183	19,6	1 500	1,6	* **BS2-2309-2CS/VT143**	–
50	90	28	104	108	11,8	1 900	0,7	* **BS2-2210-2CS/VT143**	* **BS2-2210-2CSK/VT143**
	110	45	220	224	24	1 400	2,1	* **BS2-2310-2CS/VT143**	–
55	100	31	125	127	13,7	1 700	1	* **BS2-2211-2CS/VT143**	* **BS2-2211-2CSK/VT143**
	120	49	270	280	30	1 400	2,8	* **BS2-2311-2CS/VT143**	–
60	110	34	156	166	18,6	1 600	1,3	* **BS2-2212-2CS/VT143**	* **BS2-2212-2CSK/VT143**
	130	53	310	335	36,5	1 100	3,4	* **BS2-2312-2CS/VT143**	–
65	100	35	132	173	20,4	1 200	0,95	* **24013-2CS5W/VT143**	–
	120	38	193	216	24	1 500	1,6	* **BS2-2213-2CS/VT143**	* **BS2-2213-2CSK/VT143**
	140	56	340	360	38	1 000	4,15	* **BS2-2313-2CS/VT143**	–
70	125	38	208	228	25,5	1 400	1,8	* **BS2-2214-2CS/VT143**	* **BS2-2214-2CSK/VT143**
	150	60	400	430	45	900	5,1	* **BS2-2314-2CS/VT143**	–
75	115	40	173	232	28,5	1 000	1,55	* **24015-2CS2/VT143**	–
	130	38	212	240	26,5	1 300	2,1	* **BS2-2215-2CS/VT143**	* **BS2-2215-2CSK/VT143**
	160	64	440	475	48	950	6,5	* **BS2-2315-2CS/VT143**	–
80	140	40	236	270	29	1 200	2,4	* **BS2-2216-2CS/VT143**	* **BS2-2216-2CSK/VT143**
	170	67	490	540	54	800	7,2	* **BS2-2316-2CS/VT143**	–
85	150	44	285	325	34,5	1 100	3	* **BS2-2217-2CS/VT143**	* **BS2-2217-2CSK/VT143**
90	160	48	325	375	39	1 000	3,7	* **BS2-2218-2CS/VT143**	* **BS2-2218-2CSK/VT143**
	160	52,4	355	440	48	750	4,65	* **23218-2CS/VT143**	–


* SKF Explorer bearing



Dimensions						Abutment and fillet dimensions				Calculation factors			
d	d_2 ~	D_1 ~	b	K	$r_{1,2}$ min.	d_a min.	d_a max.	D_a max.	r_a max.	e	Y_1	Y_2	Y_0
mm						mm				–			
25	30	46,6	3,7	2	1	30	30	46,4	1	0,35	1,9	2,9	1,8
30	36,2	55,7	3,7	2	1	35,6	36	56,4	1	0,31	2,2	3,3	2,2
35	43	63,7	3,7	2	1,1	42	43	65	1	0,31	2,2	3,3	2,2
40	47,2	73	5,5	3	1,1	47	47	73	1	0,28	2,4	3,6	2,5
	47,5	81	5,5	3	1,5	47,5	47,5	81	1,5	0,37	1,8	2,7	1,8
45	53	77,1	5,5	3	1,1	52	53	78	1	0,26	2,6	3,9	2,5
	55	89,1	6	3	1,5	54	55	91	1,5	0,37	1,8	2,7	1,8
50	58,1	82,1	5,5	3	1,1	57	58	83	1	0,24	2,8	4,2	2,8
	61,5	97,6	6	3	2	61	61,5	99	2	0,37	1,8	2,7	1,8
55	64	91,9	6	3	1,5	64	64	91	1,5	0,24	2,8	4,2	2,8
	67,5	109	5,5	3	2	66	67,5	109	2	0,35	1,9	2,9	1,8
60	69,1	102	6	3	1,5	69	69	101	1,5	0,24	2,8	4,2	2,8
	75	118	8,3	4,5	2,1	72	75	118	2	0,35	1,9	2,9	1,8
65	71,6	92,8	–	–	1,1	71	71,5	94	1	0,27	2,5	3,7	2,5
	76,5	111	5,5	3	1,5	74	76,5	111	1,5	0,24	2,8	4,2	2,8
	78,7	126	8,3	4,5	2,1	77	78,5	128	2	0,35	1,9	2,9	1,8
70	80,1	115	6	3	1,5	79	80	116	1,5	0,23	2,9	4,4	2,8
	86,7	137	8,3	4,5	2,1	82	86,5	138	2	0,33	2	3	2
75	81,8	105	5,5	3	1,1	81	81,5	109	1	0,28	2,4	3,6	2,5
	84,3	119	6	3	1,5	84	84	121	1,5	0,22	3	4,6	2,8
	88,2	144	8,3	4,5	2,1	87	88	148	2	0,35	1,9	2,9	1,8
80	91,7	128	6	3	2	91	91,5	129	2	0,22	3	4,6	2,8
	94,2	153	8,3	4,5	2,1	92	94	158	2	0,35	1,9	2,9	1,8
85	98,2	138	6	3	2	96	98	139	2	0,22	3	4,6	2,8
90	102	148	6	3	2	101	102	149	2	0,24	2,8	4,2	2,8
	103	148	6	3	2	101	103	149	2	0,31	2,2	3,3	2,2

8.2 Sealed spherical roller bearings

d **95 – 140** mm

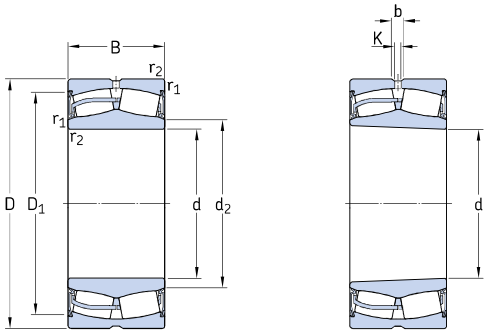


Cylindrical bore

Tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit	Limiting speed	Mass	Designations Bearing with	
			dynamic	static				cylindrical bore	tapered bore
d	D	B	C	C_0	P_u				
mm			kN		kN	r/min	kg	–	
95	170	51	380	450	46,5	950	4,65	* **BS2-2219-2CS5/VT143**	* **BS2-2219-2CS5K/VT143**
100	150	50	285	415	45,5	800	3,15	* **24020-2CS2/VT143**	–
	165	52	365	490	53	850	4,55	* **23120-2CS5/VT143**	–
	165	65	455	640	68	670	5,65	* **24120-2CS5/VT143**	–
	180	55	425	490	49	900	5,5	* **BS2-2220-2CS5/VT143**	* **BS2-2220-2CS5K/VT143**
	180	60,3	475	600	63	700	6,85	* **23220-2CS/VT143**	–
110	170	45	310	440	46,5	900	3,8	* **23022-2CS/VT143**	–
	170	60	415	620	67	670	5	* **24022-2CS5/VT143**	–
	180	56	430	585	61	800	5,75	* **23122-2CS5/VT143**	* **23122-2CS5K/VT143**
	180	69	520	750	78	630	7,1	* **24122-2CS5/VT143**	–
	200	63	560	640	63	800	7,6	* **BS2-2222-2CS5/VT143**	* **BS2-2222-2CS5K/VT143**
	200	69,8	600	765	76,5	640	9,85	* **23222-2CS5/VT143**	* **23222-2CS5K/VT143**
120	180	46	355	510	52	850	4,2	* **23024-2CS5/VT143**	–
	180	60	430	670	68	670	5,45	* **24024-2CS5/VT143**	–
	200	80	655	950	95	560	10,5	* **24124-2CS5/VT143**	–
	215	69	630	765	73,5	750	9,75	* **BS2-2224-2CS5/VT143**	* **BS2-2224-2CS5K/VT143**
	215	76	695	930	93	600	12	* **23224-2CS5/VT143**	* **23224-2CS5K/VT143**
	260	86	980	1 120	100	600	23	* **22324-2CS5/VT143**	* **22324-2CS5K/VT143**
130	200	52	430	610	62	800	6	* **23026-2CS5/VT143**	* **23026-2CS5K/VT143**
	200	69	540	815	81,5	600	8,05	* **24026-2CS5/VT143**	–
	210	80	680	1 000	100	530	11	* **24126-2CS5/VT143**	–
	230	75	735	930	88	700	11	* **BS2-2226-2CS5/VT143**	* **BS2-2226-2CS5K/VT143**
	230	80	780	1 060	104	530	14,5	* **23226-2CS5/VT143**	* **23226-2CS5K/VT143**
	280	93	1 120	1 320	114	500	29	* **22326-2CS5/VT143**	* **22326-2CS5K/VT143**
140	210	53	465	680	68	700	6,55	* **23028-2CS5/VT143**	* **23028-2CS5K/VT143**
	210	69	570	900	88	560	8,55	* **24028-2CS5/VT143**	–
	225	85	765	1 160	112	450	13,5	* **24128-2CS5/VT143**	–
	250	68	710	900	86,5	670	14	* **22228-2CS5/VT143**	* **22228-2CS5K/VT143**
	250	88	915	1 250	120	480	19	* **23228-2CS5/VT143**	* **23228-2CS5K/VT143**
	300	102	1 290	1 560	132	430	36,5	* **22328-2CS5/VT143**	* **22328-2CS5K/VT143**


* SKF Explorer bearing



Dimensions						Abutment and fillet dimensions				Calculation factors			
d	d_2 ~	D_1 ~	b	K	$r_{1,2}$ min.	d_a min.	d_a max.	D_a max.	r_a max.	e	Y_1	Y_2	Y_0
mm						mm				–			
95	108	158	8,3	4,5	2,1	107	108	158	2	0,24	2,8	4,2	2,8
100	108	139	6	3	1,5	107	108	143	1,5	0,28	2,4	3,6	2,5
	112	152	6	3	2	111	112	154	2	0,27	2,5	3,7	2,5
	110	152	4,4	2	2	110	110	154	2	0,35	1,9	2,9	1,8
	114	162	8,3	4,5	2,1	112	114	168	2	0,24	2,8	4,2	2,8
	114	161	8,3	4,5	2,1	112	114	168	2	0,3	2,3	3,4	2,2
110	122	157	6	3	2	119	122	161	2	0,23	2,9	4,4	2,8
	120	158	6	3	2	119	119	161	2	0,33	2	3	2
	122	166	8,3	4,5	2	121	122	169	2	0,27	2,5	3,7	2,5
	120	163	6	3	2	121	121	169	2	0,35	1,9	2,9	1,8
	126	182	8,3	4,5	2,1	122	126	188	2	0,25	2,7	4	2,5
	126	178	8,3	4,5	2,1	122	126	188	2	0,33	2	3	2
120	132	172	6	3	2	129	132	171	2	0,2	3,4	5	3,2
	130	166	6	3	2	129	130	171	2	0,28	2,4	3,6	2,5
	132	179	6	3	2	131	132	189	2	0,37	1,8	2,7	1,8
	136	193	11,1	6	2,1	132	136	203	2	0,26	2,6	3,9	2,5
	137	193	8,3	4,5	2,1	132	137	203	2	0,33	2	3	2
	147	229	13,9	7,5	3	134	147	246	2,5	0,33	2	3	2
130	145	186	8,3	4,5	2	139	145	191	2	0,21	3,2	4,8	3,2
	140	183	6	3	2	139	140	191	2	0,3	2,3	3,4	2,2
	141	190	6	3	2	141	141	199	2	0,33	2	3	2
	147	205	11,1	6	3	144	147	216	2,5	0,27	2,5	3,7	2,5
	147	209	8,3	4,5	3	144	147	216	2,5	0,31	2,2	3,3	2,2
	159	246	16,7	9	4	147	159	263	3	0,33	2	3	2
140	155	197	8,3	4,5	2	149	155	201	2	0,2	3,4	5	3,2
	151	195	6	3	2	149	151	201	2	0,28	2,4	3,6	2,5
	153	203	8,3	4,5	2,1	152	153	213	2	0,35	1,9	2,9	1,8
	161	225	11,1	6	3	154	161	236	2,5	0,24	2,8	4,2	2,8
	161	225	11,1	6	3	154	161	236	2,5	0,33	2	3	2
	169	261	16,7	9	4	157	169	283	3	0,33	2	3	2

8.2 Sealed spherical roller bearings

d **150 – 200** mm

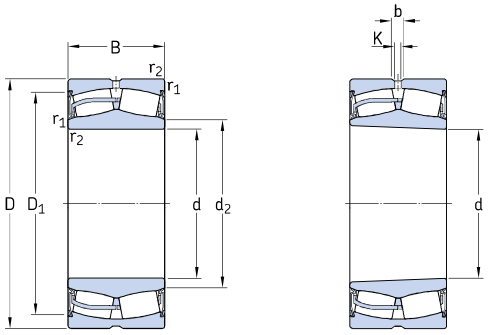


Cylindrical bore

Tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit	Limiting speed	Mass	Designations Bearing with	
			dynamic	static				cylindrical bore	tapered bore
d	D	B	C	C_0	P_u				
mm			kN		kN	r/min	kg	–	
150	225	56	510	750	73,5	670	7,95	* **23030-2CS5/VT143**	* **23030-2CS5K/VT143**
	225	75	655	1 040	100	530	10,5	* **24030-2CS5/VT143**	–
	250	80	850	1 200	114	560	16	* **23130-2CS5/VT143**	* **23130-2CS5K/VT143**
	250	100	1 020	1 530	146	400	20	* **24130-2CS5/VT143**	–
	270	73	850	1 080	102	630	18	* **22230-2CS5/VT143**	* **22230-2CS5K/VT143**
	270	96	1 080	1 460	137	430	24,5	* **23230-2CS5/VT143**	* **23230-2CS5K/VT143**
	320	108	1 460	1 760	146	400	43,5	* **22330-2CS5/VT143**	* **22330-2CS5K/VT143**
160	240	60	585	880	83	670	9,7	* **23032-2CS5/VT143**	* **23032-2CS5K/VT143**
	240	80	750	1 200	114	450	13	* **24032-2CS5/VT143**	–
	270	86	980	1 370	129	530	20,5	* **23132-2CS5/VT143**	* **23132-2CS5K/VT143**
	270	109	1 200	1 760	163	380	25	* **24132-2CS5/VT143**	–
	290	80	1 000	1 290	118	600	22,5	* **22232-2CS5/VT143**	* **22232-2CS5K/VT143**
	340	114	1 600	1 960	160	380	52	* **22332-2CS5/VT143**	* **22332-2CS5K/VT143**
170	260	67	710	1 080	100	630	13	* **23034-2CS5/VT143**	* **23034-2CS5K/VT143**
	260	90	930	1 460	137	400	17,5	* **24034-2CS5/VT143**	–
	280	88	1 040	1 500	137	480	22	* **23134-2CS5/VT143**	* **23134-2CS5K/VT143**
	280	109	1 220	1 860	170	360	27,5	* **24134-2CS5/VT143**	–
	310	86	1 120	1 460	134	500	28,5	* **22234-2CS5/VT143**	* **22234-2CS5K/VT143**
180	280	74	850	1 270	114	560	17	* **23036-2CS5/VT143**	* **23036-2CS5K/VT143**
	280	100	1 080	1 730	156	380	23	* **24036-2CS5/VT143**	–
	300	96	1 200	1 800	160	430	28	* **23136-2CS5/VT143**	* **23136-2CS5K/VT143**
	300	118	1 400	2 160	196	360	34,5	* **24136-2CS5/VT143**	–
	320	86	1 180	1 560	140	530	29	* **22236-2CS5/VT143**	* **22236-2CS5K/VT143**
190	320	104	1 400	2 080	183	400	35	* **23138-2CS5/VT143**	* **23138-2CS5K/VT143**
	320	128	1 600	2 500	212	340	43	* **24138-2CS5/VT143**	–
	340	92	1 290	1 700	150	480	35	* **22238-2CS5/VT143**	* **22238-2CS5K/VT143**
200	310	82	1 000	1 530	137	480	22	* **23040-2CS5/VT143**	* **23040-2CS5K/VT143**
	340	112	1 600	2 360	204	380	43	* **23140-2CS5/VT143**	* **23140-2CS5K/VT143**
	340	140	1 800	2 800	232	320	53,5	* **24140-2CS5/VT143**	–
	360	98	1 460	1 930	166	430	42	* **22240-2CS5/VT143**	* **22240-2CS5K/VT143**
	360	128	1 860	2 700	228	340	58	* **23240-2CS5/VT143**	* **23240-2CS5K/VT143**


* SKF Explorer bearing



Dimensions						Abutment and fillet dimensions				Calculation factors			
d	d_2 ~	D_1 ~	b	K	$r_{1,2}$ min.	d_a min.	d_a max.	D_a max.	r_a max.	e	Y_1	Y_2	Y_0
mm						mm				–			
150	165	211	8,3	4,5	2,1	161	165	214	2	0,2	3,4	5	3,2
	162	206	6	3	2,1	161	162	214	2	0,28	2,4	3,6	2,5
	168	226	11,1	6	2,1	162	168	238	2	0,28	2,4	3,6	2,5
	163	222	8,3	4,5	2,1	162	163	238	2	0,37	1,8	2,7	1,8
	174	248	13,9	7,5	3	164	174	256	2,5	0,24	2,8	4,2	2,8
	171	243	11,1	6	3	164	171	256	2,5	0,33	2	3	2
	181	281	16,7	9	4	167	181	303	3	0,33	2	3	2
160	177	225	11,1	6	2,1	171	177	229	2	0,2	3,4	5	3,2
	173	218	8,3	4,5	2,1	171	173	229	2	0,28	2,4	3,6	2,5
	180	244	13,9	7,5	2,1	172	180	258	2	0,28	2,4	3,6	2,5
	176	239	8,3	4,5	2,1	172	176	258	2	0,37	1,8	2,7	1,8
	185	264	13,9	7,5	3	174	185	276	2,5	0,25	2,7	4	2,5
	193	296	16,7	9	4	177	193	323	3	0,33	2	3	2
170	188	243	11,1	6	2,1	181	188	249	2	0,22	3	4,6	2,8
	184	235	8,3	4,5	2,1	181	184	249	2	0,3	2,3	3,4	2,2
	190	256	13,9	7,5	2,1	182	190	268	2	0,28	2,4	3,6	2,5
	185	248	8,3	4,5	2,1	182	185	268	2	0,37	1,8	2,7	1,8
	198	282	16,7	9	4	187	198	293	3	0,25	2,7	4	2,5
180	199	262	13,9	7,5	2,1	191	199	269	2	0,22	3	4,6	2,8
	194	251	8,3	4,5	2,1	191	194	269	2	0,31	2,2	3,3	2,2
	202	272	13,9	7,5	3	194	202	286	2,5	0,28	2,4	3,6	2,5
	198	266	11,1	6	3	194	198	286	2,5	0,37	1,8	2,7	1,8
	208	289	16,7	9	4	197	208	303	3	0,24	2,8	4,2	2,8
190	215	288	13,9	7,5	3	204	215	306	2,5	0,3	2,3	3,4	2,2
	210	282	11,1	6	3	204	210	306	2,5	0,4	1,7	2,5	1,6
	220	306	16,7	9	4	207	220	323	3	0,24	2,8	4,2	2,8
200	223	286	13,9	7,5	2,1	211	223	299	2	0,22	3	4,6	2,8
	227	306	16,7	9	3	214	227	326	2,5	0,3	2,3	3,4	2,2
	221	294	11,1	6	3	214	221	326	2,5	0,4	1,7	2,5	1,6
	232	324	16,7	9	4	217	232	343	3	0,24	2,8	4,2	2,8
	230	320	16,7	9	4	217	230	343	3	0,35	1,9	2,9	1,8

8.2 Sealed spherical roller bearings

d **220 – 400** mm

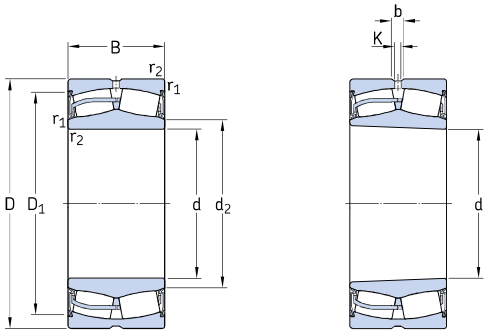


Cylindrical bore

Tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit	Limiting speed	Mass	Designations Bearing with	
			dynamic	static				cylindrical bore	tapered bore
d	D	B	C	C_0	P_u				
mm			kN		kN	r/min	kg	–	
220	300	60	630	1 080	93	600	12,5	* **23944-2CS/VT143**	–
	340	90	1 220	1 860	163	430	29	* **23044-2CS5/VT143**	* **23044-2CS5K/VT143**
	370	120	1 800	2 750	232	360	53,5	* **23144-2CS5/VT143**	* **23144-2CS5K/VT143**
	400	108	1 760	2 360	200	380	58	* **22244-2CS5/VT143**	* **22244-2CS5K/VT143**
	460	145	2 700	3 450	260	300	115	* **22344-2CS5/VT143**	* **22344-2CS5K/VT143**
240	360	92	1 290	2 080	176	400	32	* **23048-2CS5/VT143**	* **23048-2CS5K/VT143**
	400	128	2 080	3 200	255	340	66,5	* **23148-2CS5/VT143**	* **23148-2CS5K/VT143**
260	400	104	1 600	2 550	212	360	46	* **23052-2CS5/VT143**	* **23052-2CS5K/VT143**
	440	144	2 550	3 900	290	320	90,5	* **23152-2CS5/VT143**	* **23152-2CS5K/VT143**
280	460	146	2 650	4 250	335	300	97	* **23156-2CS5/VT143**	* **23156-2CS5K/VT143**
300	500	160	3 200	5 100	380	260	125	* **23160-2CS5/VT143**	* **23160-2CS5K/VT143**
320	540	176	3 750	6 100	440	260	165	* **23164-2CS5/VT143**	* **23164-2CS5K/VT143**
340	580	190	4 250	6 800	490	240	210	* **23168-2CS5/VT143**	* **23168-2CS5K/VT143**
360	600	192	4 300	6 950	490	220	214	* **23172-2CS5/VT143**	* **23172-2CS5K/VT143**
400	650	200	4 650	7 650	530	150	255	* **23180-2CS5/VT143**	* **23180-2CS5K/VT143**


* SKF Explorer bearing



Dimensions						Abutment and fillet dimensions				Calculation factors			
d	d_2 ~	D_1 ~	b	K	$r_{1,2}$ min.	d_a min.	d_a max.	D_a max.	r_a max.	e	Y_1	Y_2	Y_0
mm						mm				–			
220	238	284	8,3	4,5	2,1	231	238	289	2	0,15	4,5	6,7	4,5
	245	314	13,9	7,5	3	233	245	327	2,5	0,22	2,8	4,2	2,8
	249	332	16,7	9	4	237	249	353	3	0,28	2,4	3,6	2,5
	257	359	16,7	9	4	237	257	383	3	0,25	2,7	4	2,5
	270	406	22,3	12	5	240	270	440	4	0,3	2,3	3,4	2,2
240	265	333	13,9	7,5	3	253	265	347	2,5	0,21	3,2	4,8	3,2
	270	360	16,7	9	4	257	270	383	3	0,28	2,4	3,6	2,5
260	289	369	16,7	9	4	275	289	385	3	0,22	3	4,6	2,8
	293	398	16,7	9	4	277	293	423	3	0,3	2,3	3,4	2,2
280	314	417	16,7	9	5	300	314	440	4	0,28	2,4	3,6	2,5
300	337	451	16,7	9	5	320	337	480	4	0,28	2,4	3,6	2,5
320	361	483	22,3	12	5	340	361	520	4	0,3	2,3	3,4	2,2
340	385	515	22,3	12	5	360	385	560	4	0,3	2,3	3,4	2,2
360	408	541	22,3	12	5	380	408	580	4	0,28	2,4	3,6	2,5
400	458	587	22,3	12	6	426	458	624	5	0,28	2,4	3,6	2,5

8.3 Spherical roller bearings for vibratory applications


d **40 – 140** mm

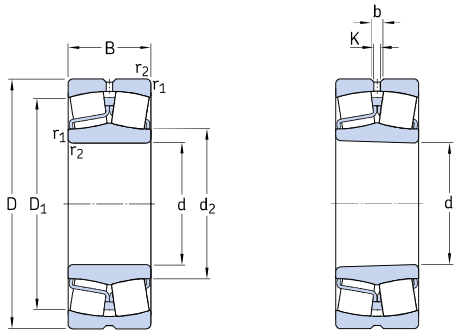

Cylindrical bore Tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designations	
			dynamic	static		Reference	Limiting		Bearing with	
d	D	B	C	C_0	P_u	speed	speed		cylindrical bore	tapered bore
mm			kN		kN	r/min		kg	–	
40	90	33	150	140	15	6 000	8 000	1,05	* **22308 E/VA405**	–
45	100	36	183	183	19,6	5 300	7 000	1,4	* **22309 E/VA405**	–
50	110	40	220	224	24	4 800	6 300	1,9	* **22310 E/VA405**	–
55	120	43	270	280	30	4 300	5 600	2,45	* **22311 E/VA405**	* **22311 EK/VA405**
60	130	46	310	335	36,5	4 000	5 300	3,1	* **22312 E/VA405**	* **22312 EK/VA405**
65	140	48	340	360	38	3 800	5 000	3,75	* **22313 E/VA405**	* **22313 EK/VA405**
70	150	51	400	430	45	3 400	4 500	4,55	* **22314 E/VA405**	* **22314 EK/VA405**
75	160	55	440	475	48	3 200	4 300	5,55	* **22315 EJA/VA405**	* **22315 EKJA/VA405**
80	170	58	490	540	54	3 000	4 000	6,6	* **22316 EJA/VA405**	* **22316 EKJA/VA405**
85	180	60	550	620	61	2 800	3 800	7,65	* **22317 EJA/VA405**	* **22317 EKJA/VA405**
	180	60	550	620	61	2 800	3 800	7,65	* **22317 EJA/VA406**	–
90	190	64	610	695	67	2 600	3 600	9,05	* **22318 EJA/VA405**	* **22318 EKJA/VA405**
95	200	67	670	765	73,5	2 600	3 400	10,5	* **22319 EJA/VA405**	* **22319 EKJA/VA405**
100	215	73	815	950	88	2 400	3 000	13,5	* **22320 EJA/VA405**	* **22320 EKJA/VA405**
	215	73	815	950	88	2 400	3 000	13,5	* **22320 EJA/VA406**	–
110	240	80	950	1 120	100	2 000	2 800	18,5	* **22322 EJA/VA405**	* **22322 EKJA/VA405**
	240	80	950	1 120	100	2 000	2 800	18,5	* **22322 EJA/VA406**	–
120	260	86	965	1 120	100	2 000	2 600	23	* **22324 CCJA/W33VA405**	* **22324 CCKJA/W33VA405**
	260	86	965	1 120	100	2 000	2 600	23	* **22324 CCJA/W33VA406**	–
130	280	93	1 120	1 320	114	1 800	2 400	29	* **22326 CCJA/W33VA405**	* **22326 CCKJA/W33VA405**
	280	93	1 120	1 320	114	1 800	2 400	29	* **22326 CCJA/W33VA406**	–
140	300	102	1 290	1 560	132	1 700	2 200	36,5	* **22328 CCJA/W33VA405**	* **22328 CCKJA/W33VA405**
	300	102	1 290	1 560	132	1 700	2 200	36,5	* **22328 CCJA/W33VA406**	–


* SKF Explorer bearing



Dimensions						Abutment and fillet dimensions			Calculation factors				Permissible accelerations[1] for oil lubrication	
d	d_2 ~	D_1 ~	b	K	$r_{1,2}$ min.	d_a min.	D_a max.	r_a max.	e	Y_1	Y_2	Y_0	rotational	linear
mm						mm			–				m/s^2	
40	49,9	74,3	6	3	1,5	49	81	1,5	0,37	1,8	2,7	1,8	115 g	31 g
45	57,6	83,4	6	3	1,5	54	91	1,5	0,37	1,8	2,7	1,8	97 g	29 g
50	63,9	91,9	6	3	2	61	99	2	0,37	1,8	2,7	1,8	85 g	28 g
55	70,1	102	5,5	3	2	66	109	2	0,35	1,9	2,9	1,8	78 g	26 g
60	77,9	110	8,3	4,5	2,1	72	118	2	0,35	1,9	2,9	1,8	70 g	25 g
65	81,6	118	8,3	4,5	2,1	77	128	2	0,35	1,9	2,9	1,8	69 g	24 g
70	90,3	128	8,3	4,5	2,1	82	138	2	0,33	2	3	2	61 g	23 g
75	92,8	135	8,3	4,5	2,1	87	148	2	0,35	1,9	2,9	1,8	88 g	23 g
80	98,3	143	8,3	4,5	2,1	92	158	2	0,35	1,9	2,9	1,8	80 g	22 g
85	108	154	8,3	4,5	3	99	166	2,5	0,33	2	3	2	74 g	21 g
	108	154	8,3	4,5	3	99	166	2,5	0,33	2	3	2	74 g	21 g
90	113	161	11,1	6	3	104	176	2,5	0,33	2	3	2	68 g	21 g
95	118	168	11,1	6	3	109	186	2,5	0,33	2	3	2	64 g	20 g
100	130	184	11,1	6	3	114	201	2,5	0,33	2	3	2	56 g	20 g
	130	184	11,1	6	3	114	201	2,5	0,33	2	3	2	56 g	20 g
110	143	204	13,9	7,5	3	124	226	2,5	0,33	2	3	2	53 g	19 g
	143	204	13,9	7,5	3	124	226	2,5	0,33	2	3	2	53 g	19 g
120	152	216	13,9	7,5	3	134	246	2,5	0,35	1,9	2,9	1,8	96 g	21 g
	152	216	13,9	7,5	3	134	246	2,5	0,35	1,9	2,9	1,8	96 g	21 g
130	164	233	16,7	9	4	147	263	3	0,35	1,9	2,9	1,8	87 g	20 g
	164	233	16,7	9	4	147	263	3	0,35	1,9	2,9	1,8	87 g	20 g
140	175	247	16,7	9	4	157	283	3	0,35	1,9	2,9	1,8	78 g	20 g
	175	247	16,7	9	4	157	283	3	0,35	1,9	2,9	1,8	78 g	20 g

[1] For details about permissible accelerations → **page 888**

8.3 Spherical roller bearings for vibratory applications
d **150 – 240** mm

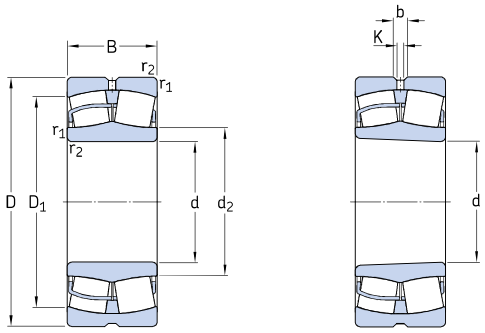


Cylindrical bore

Tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designations	
			dynamic	static		Refer-	Limit-		Bearing with	
d	D	B	C	C_0	P_u	ence speed	ing speed		cylindrical bore	tapered bore
mm			kN		kN	r/min		kg	–	
150	320	108	1 460	1 760	146	1 600	2 000	43,5	* **22330 CCJA/W33VA405**	* **22330 CCKJA/W33VA405**
	320	108	1 460	1 760	146	1 600	2 000	43,5	* **22330 CCJA/W33VA406**	**–**
160	340	114	1 600	1 960	160	1 500	1 900	52	* **22332 CCJA/W33VA405**	* **22332 CCKJA/W33VA405**
	340	114	1 600	1 960	160	1 500	1 900	52	* **22332 CCJA/W33VA406**	**–**
170	360	120	1 760	2 160	176	1 400	1 800	61	* **22334 CCJA/W33VA405**	* **22334 CCKJA/W33VA405**
	360	120	1 760	2 160	176	1 400	1 800	61	* **22334 CCJA/W33VA406**	**–**
180	380	126	2 000	2 450	193	1 300	1 700	71,5	* **22336 CCJA/W33VA405**	* **22336 CCKJA/W33VA405**
	380	126	2 000	2 450	193	1 300	1 700	71,5	* **22336 CCJA/W33VA406**	**–**
190	400	132	2 120	2 650	208	1 200	1 600	82,5	* **22338 CCJA/W33VA405**	* **22338 CCKJA/W33VA405**
	400	132	2 120	2 650	208	1 200	1 600	82,5	* **22338 CCJA/W33VA406**	**–**
200	420	138	2 320	2 900	224	1 200	1 500	95	* **22340 CCJA/W33VA405**	* **22340 CCKJA/W33VA405**
	420	138	2 320	2 900	224	1 200	1 500	95	* **22340 CCJA/W33VA406**	**–**
220	460	145	2 700	3 450	260	1 000	1 400	120	* **22344 CCJA/W33VA405**	* **22344 CCKJA/W33VA405**
240	500	155	3 100	4 000	290	950	1 300	155	* **22348 CCJA/W33VA405**	* **22348 CCKJA/W33VA405**

* SKF Explorer bearing




Dimensions						Abutment and fillet dimensions			Calculation factors				Permissible accelerations[1] for oil lubrication	
d	d_2 ~	D_1 ~	b	K	$r_{1,2}$ min.	d_a min.	D_a max.	r_a max.	e	Y_1	Y_2	Y_0	rotational	linear
mm						mm			–				m/s^2	
150	188	266	16,7	9	4	167	303	3	0,35	1,9	2,9	1,8	72 g	19 g
	188	266	16,7	9	4	167	303	3	0,35	1,9	2,9	1,8	72 g	19 g
160	200	282	16,7	9	4	177	323	3	0,35	1,9	2,9	1,8	69 g	18 g
	200	282	16,7	9	4	177	323	3	0,35	1,9	2,9	1,8	69 g	18 g
170	213	300	16,7	9	4	187	343	3	0,33	2	3	2	65 g	18 g
	213	300	16,7	9	4	187	343	3	0,33	2	3	2	65 g	18 g
180	224	317	22,3	12	4	197	363	3	0,35	1,9	2,9	1,8	59 g	17 g
	224	317	22,3	12	4	197	363	3	0,35	1,9	2,9	1,8	59 g	17 g
190	236	333	22,3	12	5	210	380	4	0,35	1,9	2,9	1,8	57 g	17 g
	236	333	22,3	12	5	210	380	4	0,35	1,9	2,9	1,8	57 g	17 g
200	249	351	22,3	12	5	220	400	4	0,33	2	3	2	55 g	17 g
	249	351	22,3	12	5	220	400	4	0,33	2	3	2	55 g	17 g
220	279	389	22,3	12	5	240	440	4	0,31	2,2	3,3	2,2	49 g	16 g
240	303	423	22,3	12	5	260	480	4	0,31	2,2	3,3	2,2	45 g	15 g

[1] For details about permissible accelerations → **page 888**

8.4 Spherical roller bearings on an adapter sleeve

d_1 **20 – 125** mm

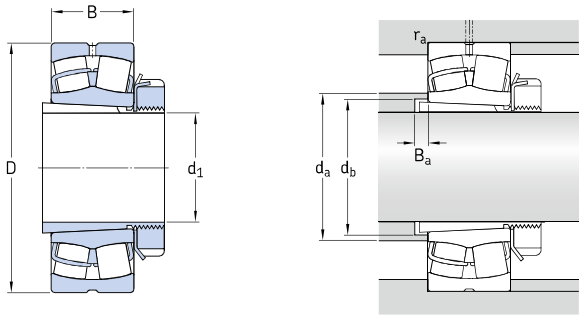

Principal dimensions			Abutment and fillet dimensions			Mass Bearing incl. sleeve	Designations Bearing[1]	Adapter sleeve[2]
d_1	D	B	d_a max.	d_b min.	B_a min.			
mm			mm			kg	–	
20	52	18	31	28	5	0,33	* **22205 EK**	**H 305**
25	62	20	37	33	5	0,39	* **22206 EK**	**H 306**
	72	19	43	33	6	0,51	* **21306 CCK**	**H 306**
30	72	23	44	39	5	0,59	* **22207 EK**	**H 307**
	80	21	47	39	7	0,69	* **21307 CCK**	**H 307**
35	80	23	49	44	5	0,68	* **22208 EK**	**H 308**
	90	23	60	44	5	0,92	* **21308 EK**	**H 308**
	90	33	49	45	6	1,25	* **22308 EK**	**H 2308**
40	85	23	54	50	7	0,81	* **22209 EK**	**H 309**
	85	23	54	50	7	0,8	**E2.22209 K**	**H 309**
	100	25	65	50	5	1,2	* **21309 EK**	**H 309**
	100	36	57	50	6	1,7	* **22309 EK**	**H 2309**
45	90	23	60	55	9	0,9	* **22210 EK**	**H 310**
	90	23	59	55	9	0,89	**E2.22210 K**	**H 310**
	110	27	72	55	6	1,6	* **21310 EK**	**H 310**
	110	40	63	56	5	2,25	* **22310 EK**	**H 2310**
50	100	25	65	60	10	1,1	* **22211 EK**	**H 311**
	100	25	65	60	10	1,15	**E2.22211 K**	**H 311**
	120	29	72	60	6	1,95	* **21311 EK**	**H 311**
	120	43	70	61	6	2,85	* **22311 EK**	**H 2311**
55	110	28	72	65	9	1,45	* **22212 EK**	**H 312**
	110	28	71	65	9	1,5	**E2.22212 K**	**H 312**
	130	31	87	65	6	2,35	* **21312 EK**	**H 312**
	130	46	77	66	6	3,5	* **22312 EK**	**H 2312**


[1] For additional bearing data → **product tables, page 904**
[2] For additional adapter sleeve data → **product tables, page 1290**
* SKF Explorer bearing
E2 → **SKF Energy Efficient** bearing

Principal dimensions			Abutment and fillet dimensions			Mass	Designations	
						Bearing incl. sleeve	Bearing[1]	Adapter sleeve[2]
d_1	D	B	d_a max.	d_b min.	B_a min.			
mm			mm			kg	–	
60	120	31	80	70	8	1,95	* **22213 EK**	**H 313**
	120	31	77	70	8	1,9	**E2.22213 K**	**H 313**
	125	31	83	75	9	2,15	* **22214 EK**	**H 314**
	140	33	94	70	6	2,9	* **21313 EK**	**H 313**
	140	48	81	72	5	4,2	* **22313 EK**	**H 2313**
	150	35	101	75	6	3,7	* **21314 EK**	**H 314**
	150	51	90	76	6	5,35	* **22314 EK**	**H 2314**
65	130	31	87	80	12	2,45	* **22215 EK**	**H 315**
	160	37	101	80	6	4,5	* **21315 EK**	**H 315**
	160	55	92	82	5	6,5	* **22315 EK**	**H 2315**
70	140	33	94	85	12	3	* **22216 EK**	**H 316**
	170	39	106	85	6	5,3	* **21316 EK**	**H 316**
	170	58	98	88	6	7,65	* **22316 EK**	**H 2316**
75	150	36	101	91	12	3,7	* **22217 EK**	**H 317**
	180	41	106	91	7	6,2	* **21317 EK**	**H 317**
	180	60	108	94	7	8,85	* **22317 EK**	**H 2317**
80	160	40	106	96	10	4,55	* **22218 EK**	**H 318**
	160	52,4	106	100	18	6	* **23218 CCK/W33**	**H 2318**
	190	43	112	96	7	7,25	* **21318 EK**	**H 318**
	190	64	113	100	7	10,5	* **22318 EK**	**H 2318**
85	170	43	112	102	9	5,45	* **22219 EK**	**H 319**
	200	45	118	102	7	8,25	* **21319 EK**	**H 319**
	200	67	118	105	7	12	* **22319 EK**	**H 2319**
90	165	52	115	107	6	6,15	* **23120 CCK/W33**	**H 3120**
	180	46	118	108	8	6,4	* **22220 EK**	**H 320**
	180	60,3	117	110	19	8,75	* **23220 CCK/W33**	**H 2320**
	215	47	118	108	7	10,5	* **21320 EK**	**H 320**
	215	73	130	110	7	15	* **22320 EK**	**H 2320**
100	170	45	125	118	14	5,75	* **23022 CCK/W33**	**H 322**
	180	56	126	117	7	7,7	* **23122 CCK/W33**	**H 3122**
	200	53	130	118	6	8,9	* **22222 EK**	**H 322**
	200	69,8	130	121	17	12,5	* **23222 CCK/W33**	**H 2322**
	240	80	143	121	7	21	* **22322 EK**	**H 2322**
110	180	46	135	127	7	5,95	* **23024 CCK/W33**	**H 3024**
	200	62	139	128	7	10	* **23124 CCK/W33**	**H 3124**
	215	58	141	128	11	11	* **22224 EK**	**H 3124**
	215	76	141	131	17	14,5	* **23224 CCK/W33**	**H 2324**
	260	86	152	131	7	25,5	* **22324 CCK/W33**	**H 2324**
115	200	52	148	137	8	8,6	* **23026 CCK/W33**	**H 3026**
	210	64	148	138	8	12	* **23126 CCK/W33**	**H 3126**
	230	64	152	138	8	14	* **22226 EK**	**H 3126**
	230	80	151	142	21	18,5	* **23226 CCK/W33**	**H 2326**
	280	93	164	142	8	33	* **22326 CCK/W33**	**H 2326**
125	210	53	158	147	8	9,4	* **23028 CCK/W33**	**H 3028**
	225	68	159	149	8	14,5	* **23128 CCK/W33**	**H 3128**
	250	68	166	149	8	18	* **22228 CCK/W33**	**H 3128**
	250	88	165	152	22	24	* **23228 CCK/W33**	**H 2328**
	300	102	175	152	8	41	* **22328 CCK/W33**	**H 2328**


[1] For additional bearing data → **product tables, page 904**
[2] For additional adapter sleeve data → **product tables, page 1290**
* SKF Explorer bearing
E2 → **SKF Energy Efficient** bearing

8.4 Spherical roller bearings on an adapter sleeve


d_1 **135 – 380** mm



Bearing on a standard sleeve



Bearing on an OH .. H design sleeve



Principal dimensions			Abutment and fillet dimensions			Mass	Designations	
						Bearing incl. sleeve	Bearing[1]	Adapter sleeve[2]
d_1	D	B	d_a max.	d_b min.	B_a min.			
mm			mm			kg	–	
135	225	56	169	158	8	11	* **23030 CCK/W33**	**H 3030**
	250	80	172	160	8	21	* **23130 CCK/W33**	**H 3130**
	270	73	178	160	15	23	* **22230 CCK/W33**	**H 3130**
	270	96	175	163	20	30	* **23230 CCK/W33**	**H 2330**
	320	108	188	163	8	47,5	* **22330 CCK/W33**	**H 2330**
140	240	60	180	168	9	14,5	* **23032 CCK/W33**	**H 3032**
	270	86	184	170	8	27,5	* **23132 CCK/W33**	**H 3132**
	290	80	191	170	14	29,5	* **22232 CCK/W33**	**H 3132**
	290	104	188	174	18	39	* **23232 CCK/W33**	**H 2332**
	340	114	200	174	8	60	* **22332 CCK/W33**	**H 2332**
150	260	67	191	179	9	18,5	* **23034 CCK/W33**	**H 3034**
	280	88	195	180	8	29,5	* **23134 CCK/W33**	**H 3134**
	310	86	203	180	10	36	* **22234 CCK/W33**	**H 3134**
	310	110	200	185	18	46,5	* **23234 CCK/W33**	**H 2334**
	360	120	213	185	8	69,5	* **22334 CCK/W33**	**H 2334**
160	250	52	199	188	9	13,5	* **23936 CCK/W33**	**H 3936**
	280	74	204	189	9	23	* **23036 CCK/W33**	**H 3036**
	300	96	207	191	8	37	* **23136 CCK/W33**	**H 3136**
	320	86	213	191	18	38	* **22236 CCK/W33**	**H 3136**
	320	112	211	195	22	49,5	* **23236 CCK/W33**	**H 2336**
	380	126	224	195	8	80	* **22336 CCK/W33**	**H 2336**
170	260	52	209	198	10	14,5	* **23938 CCK/W33**	**H 3938**
	290	75	216	199	10	25	* **23038 CCK/W33**	**H 3038**
	320	104	220	202	9	44,5	* **23138 CCK/W33**	**H 3138**
	340	92	225	202	21	46	* **22238 CCK/W33**	**H 3138**
	340	120	222	206	21	59	* **23238 CCK/W33**	**H 2338**
	400	132	236	206	9	93	* **22338 CCK/W33**	**H 2338**
180	280	60	222	208	10	19	* **23940 CCK/W33**	**H 3940**
	310	82	228	210	10	31,5	* **23040 CCK/W33**	**OH 3040 H**
	340	112	231	212	9	55,5	* **23140 CCK/W33**	**OH 3140 H**
	360	98	238	212	24	66	* **22240 CCK/W33**	**OH 3140 H**
	360	128	235	216	19	70	* **23240 CCK/W33**	**OH 2340 H**
	420	138	249	216	9	107	* **22340 CCK/W33**	**OH 2340 H**


[1] For additional bearing data → **product tables, page 904**
[2] For additional adapter sleeve data → **product tables, page 1290**
* SKF Explorer bearing

Principal dimensions			Abutment and fillet dimensions			Mass	Designations	
						Bearing incl. sleeve	Bearing[1]	Adapter sleeve[2]
d_1	D	B	d_a max.	d_b min.	B_a min.			
mm			mm			kg	–	
200	300	60	241	229	12	22,5	* **23944 CCK/W33**	**OH 3944 H**
	340	90	250	231	10	39,5	* **23044 CCK/W33**	**OH 3044 H**
	370	120	255	233	10	67,5	* **23144 CCK/W33**	**OH 3144 H**
	400	108	263	233	21	74	* **22244 CCK/W33**	**OH 3144 H**
	400	144	259	236	11	96,5	* **23244 CCK/W33**	**OH 2344 H**
	460	145	279	236	10	135	* **22344 CCK/W33**	**OH 2344 H**
220	320	60	261	249	12	24,5	* **23948 CCK/W33**	**OH 3948 H**
	360	92	271	251	11	44,5	* **23048 CCK/W33**	**OH 3048 H**
	400	128	277	254	11	80,5	* **23148 CCK/W33**	**OH 3148 H**
	440	120	290	254	19	99	* **22248 CCK/W33**	**OH 3148 H**
	440	160	286	257	6	125	* **23248 CCK/W33**	**OH 2348 H**
	500	155	303	257	11	170	* **22348 CCK/W33**	**OH 2348 H**
240	360	75	287	270	12	35	* **23952 CCK/W33**	**OH 3952 H**
	400	104	295	272	11	60,5	* **23052 CCK/W33**	**OH 3052 H**
	440	144	301	276	11	109	* **23152 CCK/W33**	**OH 3152 H**
	480	130	312	276	25	130	* **22252 CCK/W33**	**OH 3152 H**
	480	174	312	278	2	160	* **23252 CCK/W33**	**OH 2352 H**
	540	165	328	278	11	215	* **22352 CCK/W33**	**OH 2352 H**
260	380	75	308	290	12	40	* **23956 CCK/W33**	**OH 3956 H**
	420	106	315	292	12	67	* **23056 CCK/W33**	**OH 3056 H**
	460	146	321	296	12	115	* **23156 CCK/W33**	**OH 3156 H**
	500	130	333	296	28	135	* **22256 CCK/W33**	**OH 3156 H**
	500	176	332	299	11	165	* **23256 CCK/W33**	**OH 2356 H**
	580	175	354	299	12	250	* **22356 CCK/W33**	**OH 2356 H**
280	420	90	333	312	13	58,5	* **23960 CCK/W33**	**OH 3960 H**
	460	118	340	313	12	90	* **23060 CCK/W33**	**OH 3060 H**
	500	160	345	318	12	150	* **23160 CCK/W33**	**OH 3160 H**
	540	140	354	318	32	170	* **22260 CCK/W33**	**OH 3160 H**
	540	192	356	321	12	210	* **23260 CCK/W33**	**OH 3260 H**
300	440	90	354	332	13	61	* **23964 CCK/W33**	**OH 3964 H**
	480	121	360	334	13	97	* **23064 CCK/W33**	**OH 3064 H**
	540	176	370	338	13	185	* **23164 CCK/W33**	**OH 3164 H**
	580	150	379	338	39	200	* **22264 CCK/W33**	**OH 3164 H**
	580	208	382	343	13	260	* **23264 CCK/W33**	**OH 3264 H**
320	460	90	373	352	14	67,5	* **23968 CCK/W33**	**OH 3968 H**
	520	133	385	355	14	130	* **23068 CCK/W33**	**OH 3068 H**
	580	190	394	360	14	250	* **23168 CCK/W33**	**OH 3168 H**
	620	224	427	364	14	335	* **23268 CAK/W33**	**OH 3268 H**
340	480	90	394	372	14	70,5	* **23972 CCK/W33**	**OH 3972 H**
	540	134	404	375	14	135	* **23072 CCK/W33**	**OH 3072 H**
	600	192	418	380	14	260	* **23172 CCK/W33**	**OH 3172 H**
	650	170	454	380	36	375	* **22272 CAK/W33**	**OH 3172 H**
	650	232	449	385	14	375	* **23272 CAK/W33**	**OH 3272 H**
360	520	106	419	393	15	95	* **23976 CCK/W33**	**OH 3976 H**
	560	135	426	396	15	145	* **23076 CCK/W33**	**OH 3076 H**
	620	194	454	401	15	275	* **23176 CAK/W33**	**OH 3176 H**
	680	240	473	405	15	420	* **23276 CAK/W33**	**OH 3276 H**
380	540	106	439	413	15	100	* **23980 CCK/W33**	**OH 3980 H**
	600	148	450	417	15	180	* **23080 CCK/W33**	**OH 3080 H**
	650	200	475	421	15	325	* **23180 CAK/W33**	**OH 3180 H**
	720	256	500	427	15	505	* **23280 CAK/W33**	**OH 3280 H**
	820	243	534	427	28	735	* **22380 CAK/W33**	**OH 3280 H**

[1] For additional bearing data → **product tables, page 904**
[2] For additional adapter sleeve data → **product tables, page 1290**
* SKF Explorer bearing

8.4 Spherical roller bearings on an adapter sleeve

d_1 **400 – 1 000** mm

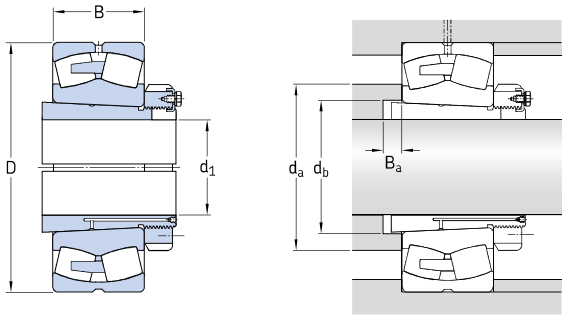


Principal dimensions			Abutment and fillet dimensions			Mass	Designations	
						Bearing incl. sleeve	Bearing[1]	Adapter sleeve[2]
d_1	D	B	d_a max.	d_b min.	B_a min.			
mm			mm			kg	–	
400	560	106	459	433	15	105	* **23984 CCK/W33**	**OH 3984 H**
	620	150	487	437	16	190	* **23084 CAK/W33**	**OH 3084 H**
	700	224	483	443	16	410	* **23184 CKJ/W33**	**OH 3184 H**
	760	272	526	446	16	590	* **23284 CAK/W33**	**OH 3284 H**
410	600	118	484	454	17	150	* **23988 CCK/W33**	**OH 3988 H**
	650	157	511	458	17	235	* **23088 CAK/W33**	**OH 3088 H**
	720	226	529	463	17	430	* **23188 CAK/W33**	**OH 3188 H**
	790	280	549	469	17	670	* **23288 CAK/W33**	**OH 3288 H**
430	620	118	516	474	17	160	* **23992 CAK/W33**	**OH 3992 H**
	680	163	533	478	17	265	* **23092 CAK/W33**	**OH 3092 H**
	760	240	555	484	17	530	* **23192 CAK/W33**	**OH 3192 H**
	830	296	574	490	17	790	* **23292 CAK/W33**	**OH 3292 H**
450	650	128	537	496	18	185	* **23996 CAK/W33**	**OH 3996 H**
	700	165	549	499	18	275	* **23096 CAK/W33**	**OH 3096 H**
	790	248	579	505	18	590	* **23196 CAK/W33**	**OH 3196 H**
	870	310	602	512	18	935	* **23296 CAK/W33**	**OH 3296 H**
470	670	128	561	516	18	195	* **239/500 CAK/W33**	**OH 39/500 H**
	720	167	573	519	18	290	* **230/500 CAK/W33**	**OH 30/500 H**
	830	264	720	527	18	690	* **231/500 CA/W33**	**OH 31/500 H**
	920	336	633	534	18	1 100	* **232/500 CAK/W33**	**OH 32/500 H**
500	710	136	594	547	20	255	* **239/530 CAK/W33**	**OH 39/530 H**
	780	185	613	551	20	405	* **230/530 CAK/W33**	**OH 30/530 H**
	870	272	638	558	20	785	* **231/530 CAK/W33**	**OH 31/530 H**
	980	355	670	566	20	1 360	* **232/530 CAK/W33**	**OH 32/530 H**
530	750	140	627	577	20	260	* **239/560 CAK/W33**	**OH 39/560 H**
	820	195	646	582	20	445	* **230/560 CAK/W33**	**OH 30/560 H**
	920	280	675	589	20	880	* **231/560 CAK/W33**	**OH 31/560 H**
	1 030	365	706	595	20	1 490	* **232/560 CAK/W33**	**OH 32/560 H**

[1] For additional bearing data → **product tables, page 904**
[2] For additional adapter sleeve data → **product tables, page 1290**
* SKF Explorer bearing

Principal dimensions			Abutment and fillet dimensions			Mass	Designations	
						Bearing incl. sleeve	Bearing[1]	Adapter sleeve[2]
d_1	D	B	d_a max.	d_b min.	B_a min.			
mm			mm			kg	–	
560	800	150	671	619	22	330	* **239/600 CAK/W33**	**OH 39/600 H**
	870	200	685	623	22	525	* **230/600 CAK/W33**	**OH 30/600 H**
	980	300	722	629	22	1 070	* **231/600 CAK/W33**	**OH 31/600 H**
	1 090	388	754	639	22	1 780	* **232/600 CAK/W33**	**OH 32/600 H**
600	850	165	708	650	22	385	* **239/630 CAK/W33**	**OH 39/630 H**
	920	212	727	654	22	595	* **230/630 CAK/W33**	**OH 30/630 H**
	1 030	315	755	663	22	1 240	* **231/630 CAK/W33**	**OH 31/630 H**
630	900	170	752	691	22	455	* **239/670 CAK/W33**	**OH 39/670 H**
	980	230	772	696	22	755	* **230/670 CAK/W33**	**OH 30/670 H**
	1 090	336	804	705	22	1 510	* **231/670 CAK/W33**	**OH 31/670 H**
	1 220	438	832	711	22	2 540	* **232/670 CAK/W33**	**OH 32/670 H**
670	950	180	794	732	26	525	* **239/710 CAK/W33**	**OH 39/710 H**
	1 030	236	816	736	26	860	* **230/710 CAK/W33**	**OH 30/710 H**
	1 150	345	851	745	26	1 750	* **231/710 CAK/W33**	**OH 31/710 H**
	1 280	450	875	753	26	3 000	* **232/710 CAK/W33**	**OH 32/710 H**
710	1 000	185	838	772	26	605	* **239/750 CAK/W33**	**OH 39/750 H**
	1 090	250	859	778	26	990	* **230/750 CAK/W33**	**OH 30/750 H**
	1 220	365	900	787	26	2 050	* **231/750 CAK/W33**	**OH 31/750 H**
	1 360	475	940	795	26	3 490	* **232/750 CAKF/W33**	**OH 32/750 H**
750	1 060	195	891	822	28	730	* **239/800 CAK/W33**	**OH 39/800 H**
	1 150	258	917	829	28	1 200	* **230/800 CAK/W33**	**OH 30/800 H**
	1 280	375	949	838	28	2 430	* **231/800 CAK/W33**	**OH 31/800 H**
800	1 120	200	946	872	28	950	* **239/850 CAK/W33**	**OH 39/850 H**
	1 220	272	972	880	28	1 390	* **230/850 CAK/W33**	**OH 30/850 H**
	1 360	400	1 013	890	28	2 800	* **231/850 CAK/W33**	**OH 31/850 H**
850	1 180	206	996	924	30	930	* **239/900 CAK/W33**	**OH 39/900 H**
	1 280	280	1 025	931	30	1 580	* **230/900 CAK/W33**	**OH 30/900 H**
900	1 250	224	1 056	976	30	1 120	* **239/950 CAK/W33**	**OH 39/950 H**
	1 360	300	1 086	983	30	1 870	* **230/950 CAK/W33**	**OH 30/950 H**
950	1 420	308	1 139	1 034	33	2 070	* **230/1000 CAKF/W33**	**OH 30/1000 H**
	1 580	462	1 185	1 047	33	4 340	* **231/1000 CAKF/W33**	**OH 31/1000 H**
1 000	1 400	250	1 171	1 087	33	1 590	* **239/1060 CAK/W33**	**OH 39/1060 H**
	1 500	325	1 205	1 087	33	2 800	* **230/1060 CAKF/W33**	**OH 30/1060 H**

[1] For additional bearing data → **product tables, page 904**
[2] For additional adapter sleeve data → **product tables, page 1290**
* SKF Explorer bearing

8.5 Spherical roller bearings on a withdrawal sleeve
d_1 **35 – 135** mm




Principal dimensions				Mass	Designations	
				Bearing incl. sleeve	Bearing[1]	Withdrawal sleeve[2]
d_1	D	B	B_2[3] ~			
mm				kg	–	
35	80	23	32	0,6	* **22208 EK**	**AH 308**
	90	23	32	0,84	* **21308 EK**	**AH 308**
	90	33	43	1,2	* **22308 EK**	**AH 2308**
40	85	23	34	0,7	* **22209 EK**	**AH 309**
	85	23	34	0,69	**E2.22209 K**	**AH 309**
	100	25	34	1,1	* **21309 EK**	**AH 309**
	100	36	47	1,55	* **22309 EK**	**AH 2309**
45	90	23	38	0,75	* **22210 EK**	**AHX 310**
	90	23	38	0,75	**E2.22210 K**	**AHX 310**
	110	27	38	1,45	* **21310 EK**	**AHX 310**
	110	40	53	2,1	* **22310 EK**	**AHX 2310**
50	100	25	40	0,95	* **22211 EK**	**AHX 311**
	100	25	40	0,98	**E2.22211 K**	**AHX 311**
	120	29	40	1,8	* **21311 EK**	**AHX 311**
	120	43	57	2,7	* **22311 EK**	**AHX 2311**
55	110	28	43	1,3	* **22212 EK**	**AHX 312**
	110	28	43	1,35	**E2.22212 K**	**AHX 312**
	130	31	43	2,2	* **21312 EK**	**AHX 312**
	130	46	61	3,3	* **22312 EK**	**AHX 2312**
60	120	31	45	1,7	* **22213 EK**	**AH 313 G**
	120	31	45	1,7	**E2.22213 K**	**AH 313 G**
	140	33	45	2,75	* **21313 EK**	**AH 313 G**
	140	48	64	4,1	* **22313 EK**	**AH 2313 G**
65	125	31	47	1,8	* **22214 EK**	**AH 314 G**
	150	35	47	3,35	* **21314 EK**	**AH 314 G**
	150	51	68	4,9	* **22314 EK**	**AHX 2314 G**

[1] For additional bearing data → **product tables, page 904**
[2] For additional withdrawal sleeve data → **product tables, page 1310**
[3] Width before the sleeve is driven into the bearing bore
* SKF Explorer bearing
E2 → **SKF Energy Efficient** bearing


Principal dimensions				Mass	Designations	
				Bearing incl. sleeve	Bearing[1]	Withdrawal sleeve[2]
d_1	D	B	B_2[3] ~			
mm				kg	–	
70	130	31	49	1,95	* 22215 EK	AH 315 G
	160	37	49	4,15	* 21315 EK	AH 315 G
	160	55	72	6	* 22315 EK	AHX 2315 G
75	140	33	52	2,4	* 22216 EK	AH 316
	170	39	52	4,75	* 21316 EK	AH 316
	170	58	75	7	* 22316 EK	AHX 2316
80	150	36	56	3,05	* 22217 EK	AHX 317
	180	41	56	5,55	* 21317 EK	AHX 317
	180	60	78	8,15	* 22317 EK	AHX 2317
85	160	40	57	3,7	* 22218 EK	AHX 318
	160	52,4	67	5	* 23218 CCK/W33	AHX 3218
	190	43	57	6,4	* 21318 EK	AHX 318
	190	64	83	9,5	* 22318 EK	AHX 2318
90	170	43	61	4,6	* 22219 EK	AHX 319
	200	45	61	7,4	* 21319 EK	AHX 319
	200	67	89	11	* 22319 EK	AHX 2319
95	165	52	68	5	* 23120 CCK/W33	AHX 3120
	180	46	63	5,4	* 22220 EK	AHX 320
	180	60,3	77	7,3	* 23220 CCK/W33	AHX 3220
	215	47	63	9,1	* 21320 EK	AHX 320
	215	73	94	14	* 22320 EK	AHX 2320
105	180	56	72	6,35	* 23122 CCK/W33	AHX 3122
	180	69	91	7,7	* 24122 CCK30/W33	AH 24122
	200	53	72	7,5	* 22222 EK	AHX 3122
	200	69,8	86	10,5	* 23222 CCK/W33	AHX 3222 G
	240	80	102	19,5	* 22322 EK	AHX 2322 G
115	180	46	64	4,8	* 23024 CCK/W33	AHX 3024
	180	60	82	5,95	* 24024 CCK30/W33	AH 24024
	200	62	79	8,7	* 23124 CCK/W33	AHX 3124
	200	80	102	11	* 24124 CCK30/W33	AH 24124
	215	58	79	9,55	* 22224 EK	AHX 3124
	215	76	94	13	* 23224 CCK/W33	AHX 3224 G
	260	86	109	24	* 22324 CCK/W33	AHX 2324 G
125	200	52	71	6,75	* 23026 CCK/W33	AHX 3026
	200	69	93	8,65	* 24026 CCK30/W33	AH 24026
	210	64	82	9,6	* 23126 CCK/W33	AHX 3126
	210	80	104	11,5	* 24126 CCK30/W33	AH 24126
	230	64	82	11,5	* 22226 EK	AHX 3126
	230	80	102	15,5	* 23226 CCK/W33	AHX 3226 G
	280	93	119	30,5	* 22326 CCK/W33	AHX 2326 G
135	210	53	73	7,35	* 23028 CCK/W33	AHX 3028
	210	69	93	9,2	* 24028 CCK30/W33	AH 24028
	225	68	88	11,5	* 23128 CCK/W33	AHX 3128
	225	85	109	14,5	* 24128 CCK30/W33	AH 24128
	250	68	88	15	* 22228 CCK/W33	AHX 3128
	250	88	109	20,5	* 23228 CCK/W33	AHX 3228 G
	300	102	130	38	* 22328 CCK/W33	AHX 2328 G

[1] For additional bearing data → **product tables, page 904**
[2] For additional withdrawal sleeve data → **product tables, page 1310**
[3] Width before the sleeve is driven into the bearing bore
* SKF Explorer bearing

8.5 Spherical roller bearings on a withdrawal sleeve
d_1 **145 – 280** mm



Bearing on an AH sleeve



Bearing on an AOH sleeve

Principal dimensions				Mass	Designations	
				Bearing incl. sleeve	Bearing[1]	Withdrawal sleeve[2]
d_1	D	B	B_2[3] ~			
mm				kg	–	
145	225	56	77	8,85	* **23030 CCK/W33**	**AHX 3030**
	225	75	101	11,5	* **24030 CCK30/W33**	**AH 24030**
	250	80	101	17	* **23130 CCK/W33**	**AHX 3130 G**
	250	100	126	21	* **24130 CCK30/W33**	**AH 24130**
	270	73	101	19	* **22230 CCK/W33**	**AHX 3130 G**
	270	96	119	26	* **23230 CCK/W33**	**AHX 3230 G**
	320	108	140	45,5	* **22330 CCK/W33**	**AHX 2330 G**
150	240	60	82	11,5	* **23032 CCK/W33**	**AH 3032**
	240	80	106	15	* **24032 CCK30/W33**	**AH 24032**
	270	86	108	23	* **23132 CCK/W33**	**AH 3132 G**
	270	109	135	28,5	* **24132 CCK30/W33**	**AH 24132**
	290	80	108	25	* **22232 CCK/W33**	**AH 3132 G**
	290	104	130	34,5	* **23232 CCK/W33**	**AH 3232 G**
	340	114	146	56	* **22332 CCK/W33**	**AH 2332 G**
160	260	67	90	15	* **23034 CCK/W33**	**AH 3034**
	260	90	117	20	* **24034 CCK30/W33**	**AH 24034**
	280	88	109	25	* **23134 CCK/W33**	**AH 3134 G**
	280	109	136	30	* **24134 CCK30/W33**	**AH 24134**
	310	86	109	31	* **22234 CCK/W33**	**AH 3134 G**
	310	110	140	41	* **23234 CCK/W33**	**AH 3234 G**
	360	120	152	65	* **22334 CCK/W33**	**AH 2334 G**
170	280	74	98	19,5	* **23036 CCK/W33**	**AH 3036**
	280	100	127	25,5	* **24036 CCK30/W33**	**AH 24036**
	300	96	122	32	* **23136 CCK/W33**	**AH 3136 G**
	300	118	145	37	* **24136 CCK30/W33**	**AH 24136**
	320	86	110	32,5	* **22236 CCK/W33**	**AH 2236 G**
	320	112	146	43,5	* **23236 CCK/W33**	**AH 3236 G**
	380	126	160	76	* **22336 CCK/W33**	**AH 2336 G**


[1] For additional bearing data → **product tables, page 904**
[2] For additional withdrawal sleeve data → **product tables, page 1310**
[3] Width before the sleeve is driven into the bearing bore
* SKF Explorer bearing

Principal dimensions				Mass	Designations	
				Bearing incl. sleeve	Bearing[1]	Withdrawal sleeve[2]
d_1	D	B	B_2[3] ~			
mm				kg	–	
180	290	75	102	21	* **23038 CCK/W33**	**AH 3038 G**
	290	100	131	27,5	* **24038 CCK30/W33**	**AH 24038**
	320	104	131	38,5	* **23138 CCK/W33**	**AH 3138 G**
	320	128	159	46,5	* **24138 CCK30/W33**	**AH 24138**
	340	92	117	39,5	* **22238 CCK/W33**	**AH 2238 G**
	340	120	152	52,5	* **23238 CCK/W33**	**AH 3238 G**
	400	132	167	87,5	* **22338 CCK/W33**	**AH 2338 G**
190	310	82	108	26,5	* **23040 CCK/W33**	**AH 3040 G**
	310	109	140	34,5	* **24040 CCK30/W33**	**AH 24040**
	340	112	140	48,5	* **23140 CCK/W33**	**AH 3140**
	340	140	171	57,5	* **24140 CCK30/W33**	**AH 24140**
	360	98	123	47	* **22240 CCK/W33**	**AH 2240**
	360	128	160	63	* **23240 CCK/W33**	**AH 3240**
	420	138	177	100	* **22340 CCK/W33**	**AH 2340**
200	340	90	117	36,5	* **23044 CCK/W33**	**AOH 3044 G**
	340	118	152	47,5	* **24044 CCK30/W33**	**AOH 24044**
	370	120	151	61,5	* **23144 CCK/W33**	**AOH 3144**
	370	150	184	76	* **24144 CCK30/W33**	**AOH 24144**
	400	108	136	68	* **22244 CCK/W33**	**AOH 2244**
	400	144	189	93	* **23244 CCK/W33**	**AOH 2344**
	460	145	189	130	* **22344 CCK/W33**	**AOH 2344**
220	360	92	123	40,5	* **23048 CCK/W33**	**AOH 3048**
	360	118	153	50,5	* **24048 CCK30/W33**	**AOH 24048**
	400	128	161	76,5	* **23148 CCK/W33**	**AOH 3148**
	400	160	195	91,5	* **24148 CCK30/W33**	**AOH 24148**
	440	120	150	95	* **22248 CCK/W33**	**AOH 2248**
	440	160	197	120	* **23248 CCK/W33**	**AOH 2348**
	500	155	197	165	* **22348 CCK/W33**	**AOH 2348**
240	400	104	135	56,5	* **23052 CCK/W33**	**AOH 3052**
	400	140	178	75	* **24052 CCK30/W33**	**AOH 24052 G**
	440	144	179	105	* **23152 CCK/W33**	**AOH 3152 G**
	440	180	218	120	* **24152 CCK30/W33**	**AOH 24152**
	480	130	161	120	* **22252 CCK/W33**	**AOH 2252 G**
	480	174	213	155	* **23252 CCK/W33**	**AOH 2352 G**
	540	165	213	205	* **22352 CCK/W33**	**AOH 2352 G**
260	420	106	139	62	* **23056 CCK/W33**	**AOH 3056**
	420	140	179	79	* **24056 CCK30/W33**	**AOH 24056 G**
	460	146	183	110	* **23156 CCK/W33**	**AOH 3156 G**
	460	180	219	130	* **24156 CCK30/W33**	**AOH 24156**
	500	130	163	125	* **22256 CCK/W33**	**AOH 2256 G**
	500	176	220	160	* **23256 CCK/W33**	**AOH 2356 G**
	580	175	220	245	* **22356 CCK/W33**	**AOH 2356 G**
280	460	118	153	82,5	* **23060 CCK/W33**	**AOH 3060**
	460	160	202	110	* **24060 CCK30/W33**	**AOH 24060 G**
	500	160	200	140	* **23160 CCK/W33**	**AOH 3160 G**
	500	200	242	180	* **24160 CCK30/W33**	**AOH 24160**
	540	140	178	155	* **22260 CCK/W33**	**AOH 2260 G**
	540	192	236	200	* **23260 CCK/W33**	**AOH 3260 G**

[1] For additional bearing data → **product tables, page 904**
[2] For additional withdrawal sleeve data → **product tables, page 1310**
[3] Width before the sleeve is driven into the bearing bore
* SKF Explorer bearing

8.5 Spherical roller bearings on a withdrawal sleeve

d_1 **300 – 670** mm



Principal dimensions				Mass	Designations	
				Bearing incl. sleeve	Bearing[1]	Withdrawal sleeve[2]
d_1	D	B	B_2[3] ~			
mm				kg	–	
300	480	121	157	89	* **23064 CCK/W33**	**AOH 3064 G**
	480	160	202	115	* **24064 CCK30/W33**	**AOH 24064 G**
	540	176	217	175	* **23164 CCK/W33**	**AOH 3164 G**
	540	218	260	225	* **24164 CCK30/W33**	**AOH 24164**
	580	150	190	185	**22264 CACK/W33**	**AOH 2264 G**
	580	208	254	250	* **23264 CCK/W33**	**AOH 3264 G**
320	520	133	171	120	* **23068 CCK/W33**	**AOH 3068 G**
	520	180	225	160	* **24068 CCK30/W33**	**AOH 24068**
	580	190	234	225	* **23168 CCK/W33**	**AOH 3168 G**
	580	243	288	295	* **24168 ECCK30J/W33**	**AOH 24168**
	620	224	273	315	* **23268 CAK/W33**	**AOH 3268 G**
340	540	134	176	125	* **23072 CCK/W33**	**AOH 3072 G**
	540	180	226	165	* **24072 CCK30/W33**	**AOH 24072**
	600	192	238	235	* **23172 CCK/W33**	**AOH 3172 G**
	600	243	289	295	* **24172 ECCK30J/W33**	**AOH 24172**
	650	170	238	275	* **22272 CAK/W33**	**AOH 3172 G**
	650	232	283	345	* **23272 CAK/W33**	**AOH 3272 G**
360	560	135	180	135	* **23076 CCK/W33**	**AOH 3076 G**
	560	180	228	170	* **24076 CCK30/W33**	**AOH 24076**
	620	194	242	250	* **23176 CAK/W33**	**AOH 3176 G**
	620	243	291	325	* **24176 ECAK30/W33**	**AOH 24176**
	680	240	294	390	* **23276 CAK/W33**	**AOH 3276 G**
380	600	148	193	165	* **23080 CCK/W33**	**AOH 3080 G**
	600	200	248	220	* **24080 ECCK30J/W33**	**AOH 24080**
	650	200	250	290	* **23180 CAK/W33**	**AOH 3180 G**
	650	250	298	365	* **24180 ECAK30/W33**	**AOH 24180**
	720	256	312	470	* **23280 CAK/W33**	**AOH 3280 G**
	820	243	312	675	* **22380 CAK/W33**	**AOH 3280 G**


[1] For additional bearing data → **product tables, page 904**
[2] For additional withdrawal sleeve data → **product tables, page 1310**
[3] Width before the sleeve is driven into the bearing bore
* SKF Explorer bearing

Principal dimensions				Mass	Designations	
				Bearing incl. sleeve	Bearing[1]	Withdrawal sleeve[2]
d_1	D	B	B_2[3] ~			
mm				kg	–	
400	620	150	196	175	* 23084 CAK/W33	AOH 3084 G
	620	200	252	230	* 24084 ECAK30/W33	AOH 24084
	700	224	276	375	* 23184 CKJ/W33	AOH 3184 G
	700	280	332	470	* 24184 ECAK30/W33	AOH 24184
	760	272	331	550	* 23284 CAK/W33	AOH 3284 G
420	650	157	205	200	* 23088 CAK/W33	AOHX 3088 G
	650	212	264	275	* 24088 ECAK30/W33	AOH 24088
	720	226	281	380	* 23188 CAK/W33	AOHX 3188 G
	720	280	332	490	* 24188 ECAK30/W33	AOH 24188
	790	280	341	620	* 23288 CAK/W33	AOHX 3288 G
440	680	163	213	225	* 23092 CAK/W33	AOHX 3092 G
	680	218	273	300	* 24092 ECAK30/W33	AOH 24092
	760	240	296	465	* 23192 CAK/W33	AOHX 3192 G
	760	300	355	590	* 24192 ECAK30/W33	AOH 24192
	830	296	360	725	* 23292 CAK/W33	AOHX 3292 G
460	700	165	217	235	* 23096 CAK/W33	AOHX 3096 G
	700	218	273	310	* 24096 ECAK30/W33	AOH 24096
	790	248	307	515	* 23196 CAK/W33	AOHX 3196 G
	790	308	363	635	* 24196 ECAK30/W33	AOH 24196
	870	310	376	860	* 23296 CAK/W33	AOHX 3296 G
480	720	167	221	250	* 230/500 CAK/W33	AOHX 30/500 G
	720	218	276	325	* 240/500 ECAK30/W33	AOH 240/500
	830	264	325	610	* 231/500 CAK/W33	AOHX 31/500 G
	830	325	383	735	* 241/500 ECAK30/W33	AOH 241/500
	920	336	405	1 020	* 232/500 CAK/W33	AOHX 32/500 G
500	780	185	242	365	* 230/530 CAK/W33	AOH 30/530
	780	250	309	455	* 240/530 ECAK30/W33	AOH 240/530 G
	870	272	337	720	* 231/530 CAK/W33	AOH 31/530
	870	335	394	885	* 241/530 ECAK30/W33	AOH 241/530 G
	980	355	424	1 290	* 232/530 CAK/W33	AOH 32/530 G
530	820	195	252	430	* 230/560 CAK/W33	AOHX 30/560
	820	258	320	515	* 240/560 ECAK30/W33	AOH 240/560 G
	920	280	347	850	* 231/560 CAK/W33	AOH 31/560
	920	355	417	1 060	* 241/560 ECK30J/W33	AOH 241/560 G
	1 030	365	434	1 500	* 232/560 CAK/W33	AOHX 32/560
570	870	200	259	480	* 230/600 CAK/W33	AOHX 30/600
	870	272	336	600	* 240/600 ECAK30/W33	AOHX 240/600
	980	300	369	1 010	* 231/600 CAK/W33	AOHX 31/600
	980	375	439	1 290	* 241/600 ECAK30/W33	AOHX 241/600
	1 090	388	459	1 760	* 232/600 CAK/W33	AOHX 32/600 G
600	920	212	272	575	* 230/630 CAK/W33	AOH 30/630
	920	290	356	730	* 240/630 ECK30J/W33	AOH 240/630 G
	1 030	315	389	1 190	* 231/630 CAK/W33	AOH 31/630
	1 030	400	466	1 500	* 241/630 ECAK30/W33	AOH 241/630 G
630	980	230	294	720	* 230/670 CAK/W33	AOH 30/670
	980	308	374	900	* 240/670 ECAK30/W33	AOH 240/670 G
	1 090	412	478	1 730	* 241/670 ECAK30/W33	AOH 241/670
	1 220	438	514	2 500	* 232/670 CAK/W33	AOH 32/670 G
670	1 030	236	302	800	* 230/710 CAK/W33	AOHX 30/710
	1 030	315	386	1 010	* 240/710 ECAK30/W33	AOH 240/710 G
	1 150	438	509	2 040	* 241/710 ECAK30/W33	AOH 241/710
	1 280	450	531	2 810	* 232/710 CAK/W33	AOH 32/710 G

[1] For additional bearing data → **product tables, page 904**
[2] For additional withdrawal sleeve data → **product tables, page 1310**
[3] Width before the sleeve is driven into the bearing bore
* SKF Explorer bearing

8.5 Spherical roller bearings on a withdrawal sleeve

d_1 **710 – 1 000** mm




Principal dimensions				Mass	Designations	
				Bearing incl. sleeve	Bearing[1]	Withdrawal sleeve[2]
d_1	D	B	B_2[3] ~			
mm				kg	–	
710	1 090	250	316	950	* **230/750 CAK/W33**	**AOH 30/750**
	1 090	335	408	1 200	* **240/750 ECAK30/W33**	**AOH 240/750 G**
	1 220	365	441	1 930	* **231/750 CAK/W33**	**AOH 31/750**
	1 220	475	548	2 280	* **241/750 ECAK30/W33**	**AOH 241/750 G**
	1 360	475	556	3 280	* **232/750 CAKF/W33**	**AOH 32/750**
750	1 150	258	326	1 100	* **230/800 CAK/W33**	**AOH 30/800**
	1 150	345	423	1 380	* **240/800 ECAK30/W33**	**AOH 240/800 G**
	1 280	375	456	2 200	* **231/800 CAK/W33**	**AOH 31/800**
	1 280	475	553	2 540	* **241/800 ECAK30/W33**	**AOH 241/800 G**
800	1 220	272	343	1 250	* **230/850 CAK/W33**	**AOH 30/850**
	1 220	365	445	1 670	* **240/850 ECAK30/W33**	**AOH 240/850 G**
	1 360	400	480	2 500	* **231/850 CAK/W33**	**AOH 31/850**
	1 360	500	600	3 050	* **241/850 ECAK30F/W33**	**AOH 241/850**
850	1 280	280	355	1 450	* **230/900 CAK/W33**	**AOH 30/900**
	1 280	375	475	1 850	* **240/900 ECAK30/W33**	**AOH 240/900**
	1 420	515	620	3 700	* **241/900 ECAK30F/W33**	**AOH 241/900**
900	1 360	300	375	1 720	* **230/950 CAK/W33**	**AOH 30/950**
	1 360	412	512	2 300	* **240/950 CAK30F/W33**	**AOH 240/950**
	1 500	545	650	3 950	* **241/950 ECAK30F/W33**	**AOH 241/950**
950	1 420	308	387	1 900	* **230/1000 CAKF/W33**	**AOH 30/1000**
	1 420	412	519	2 500	* **240/1000 CAK30F/W33**	**AOH 240/1000**
	1 580	462	547	3 950	* **231/1000 CAKF/W33**	**AOH 31/1000**
	1 580	580	695	4 800	* **241/1000 ECAK30F/W33**	**AOH 241/1000**
1 000	1 500	325	407	2 600	* **230/1060 CAKF/W33**	**AOH 30/1060**
	1 500	438	548	2 950	* **240/1060 CAK30F/W33**	**AOH 240/1060**


[1] For additional bearing data → **product tables, page 904**
[2] For additional withdrawal sleeve data → **product tables, page 1310**
[3] Width before the sleeve is driven into the bearing bore
* SKF Explorer bearing

8.5


8.6 Sealed spherical roller bearings on an adapter sleeve
d_1 **35 – 380** mm



Bearing on an
E design sleeve



Bearing on an
OH .. H design sleeve



Principal dimensions			Abutment and fillet dimensions			Mass	Designations Bearing[1]	Adapter sleeve[2]
d_1	D	B	d_a max.	d_b min.	B_a min.			
mm			mm			kg	–	
35	80	28	47	44	5	0,8	* **BS2-2208-2CSK/VT143**	**H 2308 E**
40	85	28	53	50	7	24,5	* **BS2-2209-2CSK/VT143**	**H 309 E**
45	90	28	58	55	9	1	* **BS2-2210-2CSK/VT143**	**H 310 E**
50	100	31	64	55	9	1,3	* **BS2-2211-2CSK/VT143**	**H 311 E**
55	110	34	69	60	10	1,7	* **BS2-2212-2CSK/VT143**	**H 312 E**
60	120	38	76,5	70	6	2,1	* **BS2-2213-2CSK/VT143**	**H 2313 E**
	125	38	80	70	8	2,4	* **BS2-2214-2CSK/VT143**	**H 314 E**
65	130	38	84	80	12	2,8	* **BS2-2215-2CSK/VT143**	**H 315 E**
70	140	40	91,5	85	12	3,3	* **BS2-2216-2CSK/VT143**	**H 316 E**
75	150	44	98	91	12	4,1	* **BS2-2217-2CSK/VT143**	**H 317 E**
80	160	48	102	96	10	5,1	* **BS2-2218-2CSK/VT143**	**H 2318 E/L73**[3]
85	170	51	108	102	9	6,5	* **BS2-2219-2CS5K/VT143**	**H 2319 EL**
90	180	55	114	108	8	7,4	* **BS2-2220-2CS5K/VT143**	**H 2320 E**
100	180	56	122	65	9	7,7	* **23122-2CS5K/VT143**	**H 3122 E**
	200	63	126	118	6	10	* **BS2-2222-2CS5K/VT143**	**H 2322 E**
	200	69,8	126	121	17	12,5	* **23222-2CS5K/VT143**	**H 2322 E**
110	215	69	136	128	11	12,5	* **BS2-2224-2CS5K/VT143**	**H 2324 EH**
	215	76	137	131	17	14,5	* **23224-2CS5K/VT143**	**H 2324 L**
	260	86	147	131	7	25,5	* **22324-2CS5K/VT143**	**H 2324**

[1] For additional bearing data → **product tables, page 928**
[2] For additional adapter sleeve data → **product tables, page 1290**
[3] Width reduced to 73 mm
* SKF Explorer bearing

Principal dimensions			Abutment and fillet dimensions			Mass	Designations Bearing[1]	Adapter sleeve[2]
d_1	D	B	d_a max.	d_b min.	B_a min.			
mm			mm			kg	–	
115	200	52	145	137	8	8,7	* **23026-2CS5K/VT143**	**H 3026 E**
	230	75	147	138	8	14,5	* **BS2-2226-2CS5K/VT143**	**H 2326 L**
	230	80	147	142	21	18	* **23226-2CS5K/VT143**	**H 2326 L**
	280	93	159	142	8	33	* **22326-2CS5K/VT143**	**H 2326**
125	210	53	155	147	8	9,4	* **23028-2CS5K/VT143**	**H 3028 E**
	250	68	161	149	8	17,5	* **22228-2CS5K/VT143**	**H 3128 L**
	250	88	161	152	22	24	* **23228-2CS5K/VT143**	**H 2328**
	300	102	169	152	8	41	* **22328-2CS5K/VT143**	**H 2328**
135	225	56	165	158	8	11,5	* **23030-2CS5K/VT143**	**H 3030 E**
	250	80	168	160	8	20	* **23130-2CS5K/VT143**	**H 3130 E**
	270	73	174	160	15	23	* **22230-2CS5K/VT143**	**H 3130**
	270	96	171	163	20	30	* **23230-2CS5K/VT143**	**H 2330 L**
	320	108	181	163	8	49	* **22330-2CS5K/VT143**	**H 2330**
140	240	60	177	168	9	14,5	* **23032-2CS5K/VT143**	**H 3032 E**
	270	86	180	170	8	27,5	* **23132-2CS5K/VT143**	**H 3132 E**
	290	80	185	170	14	29,5	* **22232-2CS5K/VT143**	**H 3132**
	340	114	193	174	8	60	* **22332-2CS5K/VT143**	**H 2332**
150	260	67	188	179	9	18,5	* **23034-2CS5K/VT143**	**H 3034 E**
	280	88	190	180	8	29,5	* **23134-2CS5K/VT143**	**H 3134 E**
	310	86	198	180	10	36	* **22234-2CS5K/VT143**	**H 3134**
160	280	74	199	189	9	23	* **23036-2CS5K/VT143**	**H 3036 E**
	300	96	202	191	8	35	* **23136-2CS5K/VT143**	**H 3136 L**
	320	86	208	191	18	37,5	* **22236-2CS5K/VT143**	**H 3136**
170	320	104	215	202	9	44,5	* **23138-2CS5K/VT143**	**H 3138**
	340	92	220	202	21	44,5	* **22238-2CS5K/VT143**	**H 3138**
180	310	82	223	210	10	30	* **23040-2CS5K/VT143**	**H 3040**
	340	112	227	212	9	53,5	* **23140-2CS5K/VT143**	**H 3140**
	360	98	232	212	24	53	* **22240-2CS5K/VT143**	**H 3140**
	360	128	229	216	19	69,5	* **23240-2CS5K/VT143**	**H 2340 L**
200	340	90	245	231	10	38	* **23044-2CS5K/VT143**	**OH 3044 H**
	370	120	249	233	10	66,5	* **23144-2CS5K/VT143**	**OH 3144 HTL**
	400	108	257	233	21	71,5	* **22244-2CS5K/VT143**	**OH 3144 H**
	460	145	270	236	10	131	* **22344-2CS5K/VT143**	**OH 2344 H**
220	360	92	265	251	11	42,5	* **23048-2CS5K/VT143**	**OH 3048 HE**
	400	128	270	254	11	79,5	* **23148-2CS5K/VT143**	**OH 3148 HTL**
240	400	104	289	272	11	58	* **23052-2CS5K/VT143**	**OH 3052 HE**
	440	144	293	276	11	105	* **23152-2CS5K/VT143**	**OH 3152 HTL**
260	460	146	314	296	12	114	* **23156-2CS5K/VT143**	**OH 3156 HTL**
280	500	160	337	318	12	153	* **23160-2CS5K/VT143**	**OH 3160 HE**
300	540	176	361	338	13	192	* **23164-2CS5K/VT143**	**OH 3164 H**
320	580	190	385	360	14	252	* **23168-2CS5K/VT143**	**OH 3168 HE**
340	600	192	408	380	14	265	* **23172-2CS5K/VT143**	**OH 3172 HE**
380	650	200	458	421	15	312	* **23180-2CS5K/VT143**	**OH 3180 HE**

[1] For additional bearing data → **product tables, page 928**
[2] For additional adapter sleeve data → **product tables, page 1290**
* SKF Explorer bearing