
Designation system



Prefixes

Basic designation

Listed in **diagram 2** (→ **page 43**)

Suffixes

Group 1: Internal design

E	Optimized internal design

Group 2: External design (seals, snap ring groove etc.)

N1	One locating slot in the housing washer
N2	Two locating slots in the housing washer, 180° apart

Group 3: Cage design

–	Stamped steel cage, roller centred, for E design bearings size ≤ 68 or machined brass cage, shaft washer centred, for bearings without any designation suffix
F	Machined steel cage, shaft washer centred
F3	Machined cage of spheroidal cast iron, shaft washer centred
M	Machined brass cage, shaft washer centred

Group 4.1: Materials, heat treatment

Group 4.2: Accuracy, clearance, preload, quiet running

Group 4.3: Bearing sets, matched bearings


Group 4.4: Stabilization

Group 4.5: Lubrication

Group 4.6: Other variants


VE447(E)	Shaft washer with three equally spaced threaded holes in one side face to accommodate hoisting tackle. The E indicates that appropriate eye bolts are supplied with the bearing.
VE632	Housing washer with three equally spaced threaded holes in one side face to accommodate hoisting tackle
VU029	Shaft washer modified for applications with small axial clearance

13.1 Spherical roller thrust bearings
d **60 – 170** mm




Principal dimensions			Basic load ratings dynamic	static	Fatigue load limit	Minimum load factor	Speed ratings Reference speed	Limiting speed	Mass	Designation
d	D	H	C	C_0	P_u	A				
mm			kN		kN	–	r/min		kg	–
60	130	42	390	915	114	0,08	2 800	5 000	2,6	* **29412 E**
65	140	45	455	1 080	137	0,11	2 600	4 800	3,2	* **29413 E**
70	150	48	520	1 250	153	0,15	2 400	4 300	3,9	* **29414 E**
75	160	51	600	1 430	173	0,19	2 400	4 000	4,7	* **29415 E**
80	170	54	670	1 630	193	0,25	2 200	3 800	5,6	* **29416 E**
85	150	39	380	1 060	129	0,11	2 400	4 000	2,75	* **29317 E**
	180	58	735	1 800	212	0,31	2 000	3 600	6,75	* **29417 E**
90	155	39	400	1 080	132	0,11	2 400	4 000	2,85	* **29318 E**
	190	60	815	2 000	232	0,38	1 900	3 400	7,75	* **29418 E**
100	170	42	465	1 290	156	0,16	2 200	3 600	3,65	* **29320 E**
	210	67	980	2 500	275	0,59	1 700	3 000	10,5	* **29420 E**
110	190	48	610	1 730	204	0,28	1 900	3 200	5,3	* **29322 E**
	230	73	1 180	3 000	325	0,86	1 600	2 800	13,5	* **29422 E**
120	210	54	765	2 120	245	0,43	1 700	2 800	7,35	* **29324 E**
	250	78	1 370	3 450	375	1,1	1 500	2 600	17,5	* **29424 E**
130	225	58	865	2 500	280	0,59	1 600	2 600	9	* **29326 E**
	270	85	1 560	4 050	430	1,6	1 300	2 400	22	* **29426 E**
140	240	60	980	2 850	315	0,77	1 500	2 600	10,5	* **29328 E**
	280	85	1 630	4 300	455	1,8	1 300	2 400	23	* **29428 E**
150	215	39	408	1 600	180	0,24	1 800	2 800	4,3	**29230 E**
	250	60	1 000	2 850	315	0,77	1 500	2 400	11	* **29330 E**
	300	90	1 860	5 100	520	2,5	1 200	2 200	28	* **29430 E**
160	270	67	1 180	3 450	375	1,1	1 300	2 200	14,5	* **29332 E**
	320	95	2 080	5 600	570	3	1 100	2 000	32	* **29432 E**
170	280	67	1 200	3 550	365	1,2	1 300	2 200	15	* **29334 E**
	340	103	2 360	6 550	640	4,1	1 100	1 900	44,5	* **29434 E**

* SKF Explorer bearing

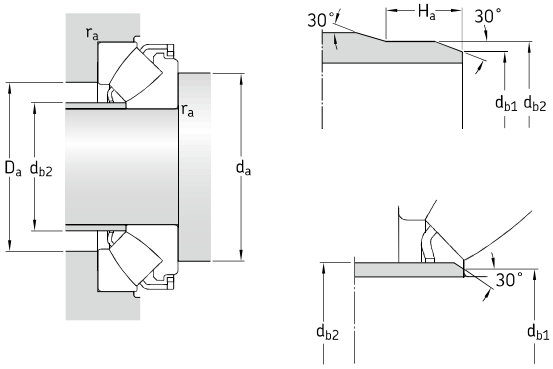

Dimensions								Abutment and fillet dimensions					
d	d_1 ~	D_1 ~	B	B_1	C	$r_{1,2}$ min.	s	d_a min.	d_{b1} max.	d_{b2} max.	H_a min.	D_a max.	r_a max.
mm								mm					
60	112	85,5	27	36,7	21	1,5	38	90	67	67	–	107	1,5
65	120	91,5	29,5	39,8	22	2	42	100	72	72	–	117	2
70	129	99	31	41	23,8	2	44,8	105	77,5	77,5	–	125	2
75	138	106	33,5	45,7	24,5	2	47	115	82,5	82,5	–	133	2
80	147	113	35	48,1	26,5	2,1	50	120	88	88	–	141	2
85	134	110	24,5	33,8	20	1,5	50	115	90	90	–	129	1,5
	155	121	37	51,1	28	2,1	54	130	94	94	–	151	2
90	138	115	24,5	34,5	19,5	1,5	53	120	95	95	–	134	1,5
	164	128	39	54	28,5	2,1	56	135	99	99	–	158	2
100	152	128	26,2	36,3	20,5	1,5	58	130	107	107	–	147	1,5
	182	142	43	57,3	32	3	62	150	110	110	–	175	2,5
110	171	140	30,3	41,7	24,8	2	63,8	145	117	117	–	164	2
	199	156	47	64,7	34,7	3	69	165	120,5	129	–	193	2,5
120	188	155	34	48,2	27	2,1	70	160	128	128	–	181	2
	216	171	50,5	70,3	36,5	4	74	180	132	142	–	209	3
130	203	166	36,7	50,6	30,1	2,1	75,6	175	138	143	–	194	2
	234	185	54	76	40,9	4	81	195	142,5	153	–	227	3
140	216	177	38,5	54	30	2,1	82	185	148	154	–	208	2
	245	195	54	75,6	41	4	86	205	153	162	–	236	3
150	200	176	24	34,3	20,5	1,5	82	180	154	154	14	193	1,5
	223	190	38	54,9	28	2,1	87	195	158	163	–	219	2
	262	208	58	80,8	43,4	4	92	220	163	175	–	253	3
160	243	203	42	60	33	3	92	210	169	176	–	235	2,5
	279	224	60,5	84,3	45,5	5	99	235	175	189	–	270	4
170	251	215	42,2	61,1	30,5	3	96	220	178	188	–	245	2,5
	297	236	65,5	91,2	50	5	104	250	185	199	–	286	4


13.1 Spherical roller thrust bearings
d 180 – 340 mm

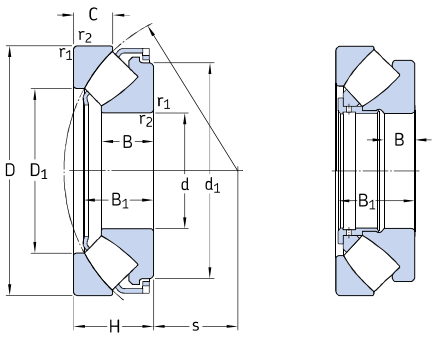

E design


Principal dimensions			Basic load ratings dynamic	static	Fatigue load limit	Minimum load factor	Speed ratings Reference speed	Limiting speed	Mass	Designation
d	D	H	C	C_0	P_u	A				
mm			kN		kN	–	r/min		kg	–
180	250	42	495	2 040	212	0,4	1 600	2 600	5,8	**29236 E**
	300	73	1 430	4 300	440	1,8	1 200	2 000	19,5	* **29336 E**
	360	109	2 600	7 350	710	5,1	1 000	1 800	52,5	* **29436 E**
190	320	78	1 630	4 750	490	2,1	1 100	1 900	23,5	* **29338 E**
	380	115	2 850	8 000	765	6,1	950	1 700	60,5	* **29438 E**
200	280	48	656	2 650	285	0,67	1 400	2 200	9,3	**29240 E**
	340	85	1 860	5 500	550	2,9	1 000	1 700	28,5	* **29340 E**
	400	122	3 200	9 000	850	7,7	850	1 600	72	* **29440 E**
220	300	48	690	3 000	310	0,86	1 300	2 200	10	**29244 E**
	360	85	2 000	6 300	610	3,8	1 000	1 700	31	* **29344 E**
	420	122	3 350	9 650	900	8,8	850	1 500	75	* **29444 E**
240	340	60	799	3 450	335	1,1	1 100	1 800	16,5	**29248**
	380	85	2 040	6 550	630	4,1	1 000	1 600	35,5	* **29348 E**
	440	122	3 400	10 200	930	9,9	850	1 500	80	* **29448 E**
260	360	60	817	3 650	345	1,3	1 100	1 700	18,5	**29252**
	420	95	2 550	8 300	780	6,5	850	1 400	49	* **29352 E**
	480	132	4 050	12 900	1 080	16	750	1 300	105	* **29452 E**
280	380	60	863	4 000	375	1,5	1 000	1 700	19,5	**29256**
	440	95	2 550	8 650	800	7,1	850	1 400	53	* **29356 E**
	520	145	4 900	15 300	1 320	22	670	1 200	135	* **29456 E**
300	420	73	1 070	4 800	465	2,2	900	1 400	30,5	**29260**
	480	109	3 100	10 600	930	11	750	1 200	75	* **29360 E**
	540	145	5 000	16 600	1 340	24	670	1 200	140	* **29460 E**
320	440	73	1 110	5 100	465	2,5	850	1 400	33	**29264**
	500	109	3 350	11 200	1 000	12	750	1 200	78	* **29364 E**
	580	155	5 700	19 000	1 530	32	600	1 100	175	* **29464 E**
340	460	73	1 130	5 400	480	2,8	850	1 300	33,5	**29268**
	540	122	2 710	11 000	950	11	600	1 100	105	**29368**
	620	170	6 700	22 400	1 760	46	560	1 000	220	* **29468 E**

* SKF Explorer bearing

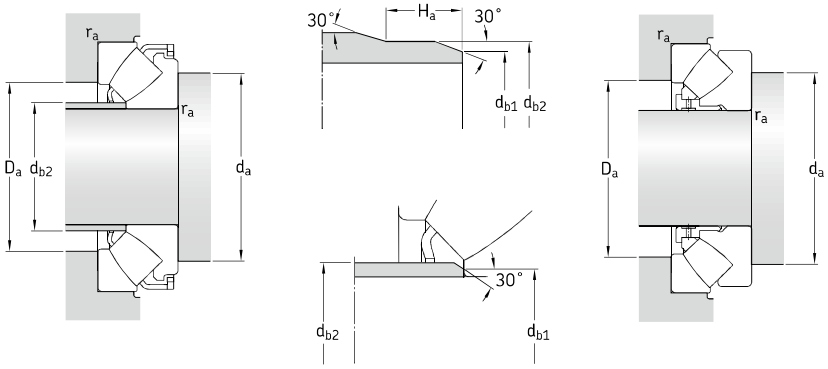


Dimensions								Abutment and fillet dimensions					
d	d_1 ~	D_1 ~	B	B_1	C	$r_{1,2}$ min.	s	d_a min.	d_{b1} max.	d_{b2} max.	H_a min.	D_a max.	r_a max.
mm								mm					
180	234	208	26	36,9	22	1,5	97	210	187	187	14	226	1,5
	270	227	46	66,2	35,5	3	103	235	189	195	–	262	2,5
	315	250	69,5	96,4	53	5	110	265	196	210	–	304	4
190	285	244	49	71,3	36	4	110	250	200	211	–	280	3
	332	265	73	101	55,5	5	117	280	207	223	–	321	4
200	260	233	30	43,4	24	2	108	235	206	207	17	253	2
	304	257	53,5	76,7	40	4	116	265	211	224	–	297	3
	350	278	77	107,1	59,4	5	122	295	217,5	234	–	337	4
220	280	252	30	43,4	24,5	2	117	255	224,5	227	17	271	2
	326	274	55	77,7	41	4	125	285	229	240	–	316	3
	371	300	77	107,4	58,5	6	132	315	238	254	–	358	5
240	330	283	37,5	57	30	2,1	130	290	–	–	–	308	2
	345	296	54	77,8	40,5	4	135	305	249	259	–	336	3
	391	322	76	107,1	59	6	142	335	258	276	–	378	5
260	350	302	37,5	57	30	2,1	139	310	–	–	–	326	2
	382	324	61	86,6	46	5	148	335	273	286	–	370	4
	427	346	86	119	63	6	154	365	278	296	–	412	5
280	370	323	37,5	57	30,5	2,1	150	325	–	–	–	347	2
	401	343	62	86,7	45,5	5	158	355	293	305	–	390	4
	464	372	95	129,9	70	6	166	395	300	320	–	446	5
300	405	353	42,5	69	38	3	162	360	–	–	–	380	2,5
	434	372	70	98,9	51	5	168	385	313	329	–	423	4
	485	392	95	130,3	70,5	6	175	415	319	340	–	465	5
320	430	372	42,7	69	38	3	172	380	–	–	–	400	2,5
	454	391	68	97,8	53	5	180	405	332	347	–	442	4
	520	422	102	139,4	74,5	7,5	191	450	344	367	–	500	6
340	445	395	43	69	37,5	3	183	400	–	–	–	422	2,5
	520	428	76	117	59,5	5	192	440	–	–	–	479	4
	557	445	112	151,4	84	7,5	201	475	363	386	–	530	6

13.1 Spherical roller thrust bearings
d **360 – 560** mm




Principal dimensions			Basic load ratings dynamic	static	Fatigue load limit	Minimum load factor	Speed ratings Reference speed	Limiting speed	Mass	Designation
d	D	H	C	C_0	P_u	A				
mm			kN		kN	–	r/min		kg	–
360	500	85	1 460	6 800	585	4,4	750	1 200	52	**29272**
	560	122	2 760	11 600	980	13	600	1 100	110	**29372**
	640	170	6 200	21 200	1 630	41	560	950	230	* **29472 EM**
380	520	85	1 580	7 650	655	5,6	700	1 100	53	**29276**
	600	132	3 340	14 000	1 160	19	530	1 000	140	**29376**
	670	175	6 800	24 000	1 860	53	530	900	260	* **29476 EM**
400	540	85	1 610	8 000	695	6,1	700	1 100	55,5	**29280**
	620	132	3 450	14 600	1 200	20	530	950	150	**29380**
	710	185	7 650	26 500	1 960	62	480	850	310	* **29480 EM**
420	580	95	1 990	9 800	815	9,1	630	1 000	75,5	**29284**
	650	140	3 740	16 000	1 290	24	500	900	170	**29384**
	730	185	7 800	27 500	2 080	69	480	850	325	* **29484 EM**
440	600	95	2 070	10 400	850	10	630	1 000	78	**29288**
	680	145	5 200	19 300	1 560	34	530	850	180	* **29388 EM**
	780	206	9 000	32 000	2 320	91	430	750	410	* **29488 EM**
460	620	95	2 070	10 600	865	11	600	950	81	**29292**
	710	150	4 310	19 000	1 500	34	450	800	215	**29392**
	800	206	9 300	33 500	2 450	100	430	750	425	* **29492 EM**
480	650	103	2 350	11 800	950	13	560	900	98	**29296**
	730	150	4 370	19 600	1 530	36	450	800	220	**29396**
	850	224	9 550	39 000	2 800	140	340	670	550	**29496 EM**
500	670	103	2 390	12 500	1 000	15	560	900	100	**292/500**
	750	150	4 490	20 400	1 560	40	430	800	235	**293/500**
	870	224	9 370	40 000	2 850	150	340	670	560	**294/500 EM**
530	710	109	3 110	15 300	1 220	22	530	850	115	**292/530 EM**
	800	160	5 230	23 600	1 800	53	400	750	270	**293/530**
	920	236	10 500	44 000	3 100	180	320	630	650	**294/530 EM**
560	750	115	2 990	16 000	1 220	24	480	800	140	**292/560**
	980	250	12 000	51 000	3 550	250	300	560	810	**294/560 EM**

* SKF Explorer bearing




Dimensions								Abutment and fillet dimensions		
d	d_1 ~	D_1 ~	B	B_1	C	$r_{1,2}$ min.	s	d_a min.	D_a max.	r_a max.
mm								mm		
360	485	423	49,5	81	44	4	195	430	453	3
	540	448	76	117	59,5	5	202	460	500	4
	580	474	109	164	83,5	7,5	210	495	550	6
380	505	441	53,5	81	42	4	202	450	473	3
	580	477	83,5	127	63,5	6	216	495	535	5
	610	494	114	168	87,5	7,5	222	525	580	6
400	526	460	53	81	42,2	4	212	470	493	3
	596	494	83	127	64	6	225	510	550	5
	645	525	120	178	89,5	7,5	234	550	615	6
420	564	489	61	91	46	5	225	500	525	4
	626	520	88	135	67,5	6	235	535	580	5
	665	545	121	178	90,5	7,5	244	575	635	6
440	585	508	61	91	46,5	5	235	520	545	4
	626	540	91	140	70,5	6	249	560	605	5
	710	577	133	199	101	9,5	257	605	675	8
460	605	530	61,5	91	46	5	245	540	565	4
	685	567	94	144	72,5	6	257	585	630	5
	730	596	133	199	101,5	9,5	268	630	695	8
480	635	556	62,5	99	53,5	5	259	570	595	4
	705	591	93	144	73,5	6	270	610	655	5
	770	625	147	216	108	9,5	280	660	735	8
500	654	574	62,5	99	53,5	5	268	585	615	4
	725	611	92,5	144	74	6	280	630	675	5
	795	648	145	216	110	9,5	290	685	755	8
530	675	608	66	105	56	5	285	620	655	4
	772	648	102,5	154	76	7,5	295	670	715	6
	840	686	152	228	116	9,5	308	725	800	8
560	732	644	68	111	61	5	302	655	685	4
	890	727	165	241	122	12	328	770	850	10

13.1 Spherical roller thrust bearings
d **600 – 1 600** mm



Principal dimensions			Basic load ratings dynamic	static	Fatigue load limit	Minimum load factor	Speed ratings Reference speed	Limiting speed	Mass	Designation
d	D	H	C	C_0	P_u	A				
mm			kN		kN	–	r/min		kg	–
600	800	122	3 740	18 600	1 460	33	450	700	170	**292/600 EM**
	1 030	258	13 100	56 000	4 000	300	280	530	845	**294/600 EM**
630	850	132	4 770	23 600	1 800	53	400	670	210	**292/630 EM**
	950	190	8 450	38 000	2 900	140	320	600	485	**293/630 EM**
	1 090	280	14 400	62 000	4 150	370	260	500	1 040	**294/630 EM**
670	900	140	4 200	22 800	1 660	49	380	630	255	**292/670**
	1 150	290	15 400	68 000	4 500	440	240	450	1 210	**294/670 EM**
710	1 060	212	9 950	45 500	3 400	200	280	500	610	**293/710 EM**
	1 220	308	17 600	76 500	5 000	560	220	430	1 500	**294/710 EF**
750	1 000	150	6 100	31 000	2 320	91	340	560	325	**292/750 EM**
	1 120	224	9 370	45 000	3 050	190	260	480	770	**293/750**
	1 280	315	18 700	85 000	5 500	690	200	400	1 650	**294/750 EF**
800	1 060	155	6 560	34 500	2 550	110	320	530	380	**292/800 EM**
	1 180	230	9 950	49 000	3 250	230	240	450	865	**293/800**
	1 360	335	20 200	93 000	5 850	820	190	360	2 030	**294/800 EF**
850	1 120	160	6 730	36 000	2 550	120	300	500	425	**292/850 EM**
	1 440	354	23 900	108 000	7 100	1 100	170	340	2 390	**294/850 EF**
900	1 180	170	7 820	42 500	3 000	170	280	450	475	**292/900 EM**
	1 520	372	26 700	122 000	7 200	1 400	160	300	2 650	**294/900 EF**
950	1 250	180	8 280	45 500	3 100	200	260	430	600	**292/950 EM**
	1 600	390	28 200	132 000	7 800	1 700	140	280	3 070	**294/950 EF**
1 000	1 670	402	31 100	140 000	8 650	1 900	130	260	3 390	**294/1000 EF**
1 060	1 400	206	10 500	58 500	3 750	330	220	360	860	**292/1060 EF**
	1 770	426	33 400	156 000	8 500	2 300	120	240	4 280	**294/1060 EF**
1 180	1 520	206	10 900	64 000	3 750	390	220	340	950	**292/1180 EF**
1 250	1 800	330	24 800	129 000	7 500	1 600	130	240	2 770	**293/1250 EF**
1 600	2 280	408	36 800	200 000	11 800	3 800	90	160	5 380	**293/1600 EF**



Dimensions								Abutment and fillet dimensions		
d	d_1 ~	D_1 ~	B	B_1	C	$r_{1,2}$ min.	s	d_a min.	D_a max.	r_a max.
mm								mm		
600	760	688	74	117	60	5	321	700	735	4
	940	769	170	249	128	12	349	815	900	10
630	810	723	85	127	62	6	338	740	780	5
	880	761	122	183	92	9,5	359	795	860	8
	995	815	181	270	137	12	365	860	950	10
670	880	773	84	135	73	6	361	790	825	5
	1 045	864	188	280	141	15	387	905	1 000	12
710	985	855	134	205	103	9,5	404	890	960	8
	1 110	917	199	298	149	15	415	965	1 070	12
750	950	858	93	144	74	6	409	880	925	5
	1 086	910	139	216	109	9,5	415	935	1 000	8
	1 170	964	207	305	153	15	436	1 015	1 120	12
800	1 010	911	97	149	77	7,5	434	935	980	6
	1 146	965	144	222	111	9,5	440	995	1 060	8
	1 250	1 034	213	324	165	15	462	1 080	1 185	12
850	1 060	967	95	154	82	7,5	455	980	1 030	6
	1 315	1 077	236	342	172	15	507	1 160	1 270	12
900	1 136	1 020	105	164	85	7,5	487	1 045	1 100	6
	1 394	1 137	247	360	186	15	518	1 215	1 320	12
950	1 185	1 081	111	174	88	7,5	507	1 095	1 155	6
	1 470	1 209	255	377	191	15	546	1 275	1 400	12
1 000	1 531	1 270	262	389	190	15	599	1 350	1 490	12
1 060	1 325	1 211	125	199	100	9,5	566	1 225	1 290	8
	1 615	1 349	274	412	207	15	610	1 410	1 555	12
1 180	1 450	1 331	125	199	101	9,5	625	1 345	1 410	8
1 250	1 685	1 474	213	319	161	12	698	1 540	1 640	10
1 600	2 130	1 885	259	395	195	19	894	1 955	2 090	15