
Designation system



Basic designation

Listed in **diagram 2** (→ **page 43**)

Suffixes

Cage design

V	Full complement of balls (no cage)

Materials

HR	Polymer ball bearings

Material combination designation

Character 1	Outer ring
Character 2	Inner ring
Character 3	Balls
Character 4	Cage (single row deep groove ball bearings) Alternate balls (thrust ball bearings)


Material codes:

1	Polyoxymethylene (POM)
2	Polypropylene (PP)
3	Polyethylene (PE)
6	Polyetheretherketone (PEEK)
8	Polyoxymethylene sooted (POM sooted)
B	Polyethylene terephthalate (PET)
D	Ceramic ZrO_2
K	Polyvinylidene fluoride (PVDF)
L	Polyphenylensulfide (PPS)
M	Polyimide (PI)
N	Polyamide 66 (PA66)
P	Brass
Q	Glass
R	Borosilicate glass
S	Stainless steel 1.4034
T	Stainless steel 1.4401
W	Titanium
X	Ceramic Si_3N_4
Z	Ceramic Al_2O_3

The complete designation is printed on the package. Polymer ball bearings do not have the designation inscribed on the rings or washers.

15H.1 Polymer single row deep groove ball bearings

d **3 – 30** mm



Principal dimensions			Basic load ratings dynamic[2]	static[3]	Limiting speed	Dimensions			Mass[1]	Designations Bearing with stainless steel balls	glass balls
d	D	B	C	C_0		d_1	D_1	r_1 min.			
mm			kN		r/min	mm			g	–	
3	10	4	0,045	0,03	4 500	5,6	7,9	0,2	0,4	**623/HR11TN**	**623/HR11QN**
	10	4	0,03	0,025	3 960	5,6	7,9	0,2	0,3	**623/HR22T2**	**623/HR22Q2**
4	13	5	0,06	0,04	3 600	6,6	9,8	0,3	0,9	**624/HR11TN**	**624/HR11QN**
	13	5	0,04	0,03	3 170	6,6	9,8	0,3	0,7	**624/HR22T2**	**624/HR22Q2**
5	16	5	0,065	0,045	3 050	7,5	12,5	0,4	1,4	**625/HR11TN**	**625/HR11QN**
	16	5	0,045	0,035	2 680	7,5	12,5	0,4	1,3	**625/HR22T2**	**625/HR22Q2**
6	19	6	0,07	0,05	2 600	9	15,4	0,4	2,8	**626/HR11TN**	**626/HR11QN**
	19	6	0,05	0,04	2 290	9	15,4	0,4	2,4	**626/HR22T2**	**626/HR22Q2**
7	19	6	0,07	0,05	2 600	10,8	15,9	0,4	2,2	**607/HR11TN**	**607/HR11QN**
	19	6	0,05	0,04	2 290	10,8	15,9	0,4	1,7	**607/HR22T2**	**607/HR22Q2**
	22	7	0,08	0,055	2 200	11,5	17,9	0,4	3,9	**627/HR11TN**	**627/HR11QN**
	22	7	0,055	0,045	1 900	11,5	17,9	0,4	3,2	**627/HR22T2**	**627/HR22Q2**
8	22	7	0,08	0,055	2 200	11,5	17,9	0,4	3,6	**608/HR11TN**	**608/HR11QN**
	22	7	0,055	0,045	1 930	11,5	17,9	0,4	3	**608/HR22T2**	**608/HR22Q2**
9	24	7	0,09	0,06	2 050	13,4	19,9	0,4	7,8	**609/HR11TN**	**609/HR11QN**
	24	7	0,065	0,05	1 800	13,4	19,9	0,4	5,7	**609/HR22T2**	**609/HR22Q2**
	26	8	0,1	0,07	1 900	13,7	21,3	0,4	6,3	**629/HR11TN**	**629/HR11QN**
	26	8	0,07	0,055	1 670	13,7	21,3	0,4	5,2	**629/HR22T2**	**629/HR22Q2**
10	26	8	0,13	0,09	1 900	15,1	21,4	0,4	6,2	**6000/HR11TN**	**6000/HR11QN**
	26	8	0,09	0,07	1 670	15,1	21,4	0,4	5,1	**6000/HR22T2**	**6000/HR22Q2**
	28	8	0,13	0,09	1 900	15,1	20,9	0,4	7,3	**16100/HR11TN**	**16100/HR11QN**
	28	8	0,09	0,07	1 670	15,1	20,9	0,4	5,8	**16100/HR22T2**	**16100/HR22Q2**
	30	9	0,16	0,11	1 650	17	23	0,9	8,9	**6200/HR11TN**	**6200/HR11QN**
	30	9	0,11	0,09	1 450	17	23	0,9	7,1	**6200/HR22T2**	**6200/HR22Q2**
	35	11	0,28	0,19	1 400	18	26,9	0,9	17,5	**6300/HR11TN**	**6300/HR11QN**
	35	11	0,195	0,15	1 230	18	26,9	0,9	14,5	**6300/HR22T2**	**6300/HR22Q2**


[1] Valid for bearings with stainless steel balls.
[2] Above 50 °C *(120 °F)* and/or above 20% of limiting speed consider reduction according to **diagram 1** (→ **page 1256**).
[3] Above 50 °C *(120°F)* consider reduction according to **diagram 1** (→ **page 1256**).

Principal dimensions			Basic load ratings dynamic[2]	static[3]	Limiting speed	Dimensions			Mass[1]	Designations Bearing with stainless steel balls	glass balls
d	D	B	C	C_0		d_1	D_1	r_1 min.			
mm			kN		r/min	mm			g	–	
12	28	8	0,16	0,11	1 750	17,1	22,9	0,4	7,1	**6001/HR11TN**	**6001/HR11QN**
	28	8	0,11	0,09	1 540	17,1	22,9	0,4	5,9	**6001/HR22T2**	**6001/HR22Q2**
	32	10	0,22	0,15	1 550	18,2	25,7	0,9	11	**6201/HR11TN**	**6201/HR11QN**
	32	10	0,155	0,12	1 360	18,2	25,7	0,9	9,9	**6201/HR22T2**	**6201/HR22Q2**
	37	12	0,31	0,21	1 300	19,5	29,5	0,9	22	**6301/HR11TN**	**6301/HR11QN**
	37	12	0,215	0,17	1 140	19,5	29,5	0,9	18,5	**6301/HR22T2**	**6301/HR22Q2**
15	32	8	0,19	0,13	1 500	19,8	25,9	0,4	8	**16002/HR11TN**	**16002/HR11QN**
	32	8	0,135	0,105	1 320	19,8	25,9	0,4	6,5	**16002/HR22T2**	**16002/HR22Q2**
	32	9	0,2	0,14	1 500	20,6	26,4	0,4	9,1	**6002/HR11TN**	**6002/HR11QN**
	32	9	0,14	0,11	1 320	20,6	26,4	0,4	7,4	**6002/HR22T2**	**6002/HR22Q2**
	35	11	0,25	0,17	1 400	21,5	29	0,9	14,5	**6202/HR11TN**	**6202/HR11QN**
	35	11	0,175	0,135	1 230	21,5	29	0,9	11	**6202/HR22T2**	**6202/HR22Q2**
	42	13	0,37	0,26	1 200	23,7	33,7	0,9	27,5	**6302/HR11TN**	**6302/HR11QN**
	42	13	0,26	0,21	1 060	23,7	33,7	0,9	23	**6302/HR22T2**	**6302/HR22Q2**
17	35	8	0,24	0,16	1 400	22,2	29,8	0,4	9,6	**16003/HR11TN**	**16003/HR11QN**
	35	8	0,17	0,13	1 230	22,2	29,8	0,4	7,9	**16003/HR22T2**	**16003/HR22Q2**
	35	10	0,26	0,17	1 400	23,1	28,9	0,4	11,5	**6003/HR11TN**	**6003/HR11QN**
	35	10	0,18	0,135	1 230	23,1	28,9	0,4	9	**6003/HR22T2**	**6003/HR22Q2**
	40	12	0,32	0,22	1 250	24,2	32,7	0,9	19	**6203/HR11TN**	**6203/HR11QN**
	40	12	0,225	0,175	1 100	24,2	32,7	0,9	15,5	**6203/HR22T2**	**6203/HR22Q2**
	47	14	0,37	0,26	1 050	26,5	37,4	0,9	37,5	**6303/HR11TN**	**6303/HR11QN**
	47	14	0,26	0,21	920	26,5	37,4	0,9	31,5	**6303/HR22T2**	**6303/HR22Q2**
20	42	8	0,29	0,19	1 150	26,5	34,5	0,4	14	**16004/HR11TN**	**16004/HR11QN**
	42	8	0,205	0,15	1 010	26,5	34,5	0,4	10,5	**16004/HR22T2**	**16004/HR22Q2**
	42	12	0,3	0,2	1 150	27,2	34,8	0,9	20,5	**6004/HR11TN**	**6004/HR11QN**
	42	12	0,21	0,16	1 010	27,2	34,8	0,9	17	**6004/HR22T2**	**6004/HR22Q2**
	47	14	0,42	0,27	1 050	28,5	38,5	0,9	33,5	**6204/HR11TN**	**6204/HR11QN**
	47	14	0,295	0,215	920	28,5	38,5	0,9	27,5	**6204/HR22T2**	**6204/HR22Q2**
	52	15	0,5	0,35	950	30,3	41,6	0,9	48,5	**6304/HR11TN**	**6304/HR11QN**
	52	15	0,35	0,28	840	30,3	41,6	0,9	40,5	**6304/HR22T2**	**6304/HR22Q2**
25	47	8	0,31	0,21	1 050	32,3	40,9	0,4	19	**16005/HR11TN**	**16005/HR11QN**
	47	8	0,215	0,17	920	32,3	40,9	0,4	16	**16005/HR22T2**	**16005/HR22Q2**
	47	12	0,36	0,24	1 050	32,2	39,8	0,9	24	**6005/HR11TN**	**6005/HR11QN**
	47	12	0,25	0,19	920	32,2	39,8	0,9	19,5	**6005/HR22T2**	**6005/HR22Q2**
	52	15	0,48	0,32	950	34	44	0,9	39,5	**6205/HR11TN**	**6205/HR11QN**
	52	15	0,335	0,255	840	34	44	0,9	32,5	**6205/HR22T2**	**6205/HR22Q2**
	62	17	0,6	0,4	725	37	50	0,9	76,5	**6305/HR11TN**	**6305/HR11QN**
	62	17	0,42	0,32	640	37	50	0,9	64	**6305/HR22T2**	**6305/HR22Q2**
30	55	9	0,37	0,24	900	37,7	47,3	0,4	26	**16006/HR11TN**	**16006/HR11QN**
	55	9	0,26	0,19	790	37,7	47,3	0,4	21,5	**16006/HR22T2**	**16006/HR22Q2**
	55	13	0,42	0,28	900	38,2	46,8	0,9	35,5	**6006/HR11TN**	**6006/HR11QN**
	55	13	0,295	0,225	790	38,2	46,8	0,9	29	**6006/HR22T2**	**6006/HR22Q2**
	62	16	0,55	0,36	800	40,3	51,6	0,9	63,5	**6206/HR11TN**	**6206/HR11QN**
	62	16	0,385	0,29	700	40,3	51,6	0,9	52,5	**6206/HR22T2**	**6206/HR22Q2**
	72	19	0,70	0,46	675	44,7	59,2	1,4	114	**6306/HR11TN**	**6306/HR11QN**
	72	19	0,490	0,37	590	44,7	59,2	1,4	95,5	**6306/HR22T2**	**6306/HR22Q2**

[1] Valid for bearings with stainless steel balls.
[2] Above 50 °C *(120 °F)* and/or above 20% of limiting speed consider reduction according to **diagram 1** (→ **page 1256**).
[3] Above 50 °C *(120 °F)* consider reduction according to **diagram 1** (→ **page 1256**).

15H.1 Polymer single row deep groove ball bearings

d **35 – 60** mm



Principal dimensions			Basic load ratings dynamic[2]	static[3]	Limiting speed	Dimensions			Mass[1]	Designations Bearing with stainless steel balls	glass balls
d	D	B	C	C_0		d_1	D_1	r_1 min.			
mm			kN		r/min	mm			g	–	
35	62	9	0,41	0,27	800	43,7	53,3	0,4	32,5	**16007/HR11TN**	**16007/HR11QN**
	62	9	0,285	0,215	700	43,7	53,3	0,4	26,5	**16007/HR22T2**	**16007/HR22Q2**
	62	14	0,48	0,32	800	43,7	53,3	0,9	47,5	**6007/HR11TN**	**6007/HR11QN**
	62	14	0,335	0,255	700	43,7	53,3	0,9	39	**6007/HR22T2**	**6007/HR22Q2**
	72	17	0,62	0,41	700	47	60	0,9	95	**6207/HR11TN**	**6207/HR11QN**
	72	17	0,435	0,33	620	47	60	0,9	80	**6207/HR22T2**	**6207/HR22Q2**
	80	21	0,75	0,49	600	49,55	65,35	1,4	154	**6307/HR11TN**	**6307/HR11QN**
	80	21	0,525	0,39	530	49,55	65,35	1,4	130	**6307/HR22T2**	**6307/HR22Q2**
40	68	9	0,45	0,3	750	49,4	58,6	0,4	37,5	**16008/HR11TN**	**16008/HR11QN**
	68	9	0,315	0,24	660	49,4	58,6	0,4	30,5	**16008/HR22T2**	**16008/HR22Q2**
	68	15	0,52	0,35	750	49,2	58,8	0,9	56,5	**6008/HR11TN**	**6008/HR11QN**
	68	15	0,365	0,28	660	49,2	58,8	0,9	45,5	**6008/HR22T2**	**6008/HR22Q2**
	80	18	0,66	0,44	625	53	67	0,9	132	**6208/HR11TN**	**6208/HR11QN**
	80	18	0,46	0,35	550	53	67	0,9	113	**6208/HR22T2**	**6208/HR22Q2**
	90	23	0,8	0,52	575	56,1	73,75	1,9	208	**6308/HR11TN**	**6308/HR11QN**
	90	23	0,56	0,415	510	56,1	73,75	1,9	175	**6308/HR22T2**	**6308/HR22Q2**
45	75	10	0,5	0,33	650	55	65	0,9	49	**16009/HR11TN**	**16009/HR11QN**
	75	10	0,35	0,265	570	55	65	0,9	39,5	**16009/HR22T2**	**16009/HR22Q2**
	75	16	0,56	0,38	650	54,7	65,3	0,9	75	**6009/HR11TN**	**6009/HR11QN**
	75	16	0,39	0,305	570	54,7	65,3	0,9	61,5	**6009/HR22T2**	**6009/HR22Q2**
	85	19	0,72	0,47	580	57,5	72,35	1,9	138	**6209/HR11TN**	**6209/HR11QN**
	85	19	0,505	0,375	510	57,5	72,35	1,9	117	**6209/HR22T2**	**6209/HR22Q2**
	100	25	0,9	0,54	500	62,18	82,65	1,9	296	**6309/HR11TN**	**6309/HR11QN**
	100	25	0,63	0,43	440	62,18	82,65	1,9	255	**6309/HR22T2**	**6309/HR22Q2**
50	80	16	0,58	0,39	600	60	70	0,9	82	**6010/HR11TN**	**6010/HR11QN**
	80	16	0,405	0,31	530	60	70	0,9	67	**6010/HR22T2**	**6010/HR22Q2**
	90	20	0,77	0,54	550	62,5	77,35	1,9	154	**6210/HR11TN**	**6210/HR11QN**
	90	20	0,54	0,43	480	62,5	77,35	1,9	130	**6210/HR22T2**	**6210/HR22Q2**


[1] Valid for bearings with stainless steel balls.
[2] Above 50 °C *(120 °F)* and/or above 20% of limiting speed consider reduction according to **diagram 1** (→ **page 1256**).
[3] Above 50 °C *(120°F)* consider reduction according to **diagram 1** (→ **page 1256**).

Principal dimensions			Basic load ratings dynamic[2]	static[3]	Limiting speed	Dimensions			Mass[1]	Designations Bearing with stainless steel balls	glass balls
d	D	B	C	C_0		d_1	D_1	r_1 min.			
mm			kN		r/min	mm			g	–	
55	90	18	0,6	0,4	550	66,3	78,7	0,9	121	**6011/HR11TN**	**6011/HR11QN**
	90	18	0,42	0,32	480	66,3	78,7	0,9	100	**6011/HR22T2**	**6011/HR22Q2**
	100	21	0,8	0,6	500	69,06	85,8	2,4	207	**6211/HR11TN**	**6211/HR11QN**
	100	21	0,56	0,48	440	69,06	85,8	2,4	177	**6211/HR22T2**	**6211/HR22Q2**
60	95	18	0,64	0,42	500	70,2	84,5	1,9	127	**6012/HR11TN**	**6012/HR11QN**
	95	18	0,45	0,335	440	70,2	84,5	1,9	104	**6012/HR22T2**	**6012/HR22Q2**

[1] Valid for bearings with stainless steel balls.
[2] Above 50 °C *(120 °F)* and/or above 20% of limiting speed consider reduction according to **diagram 1** (→ **page 1256**).
[3] Above 50 °C *(120 °F)* consider reduction according to **diagram 1** (→ **page 1256**).

15H.2 Polymer thrust ball bearings

d **10 – 45** mm

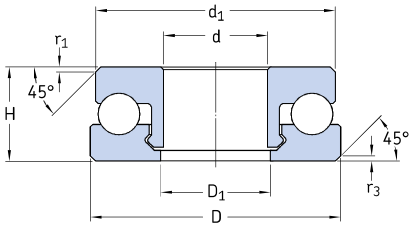

Principal dimensions			Basic load ratings		Limiting speed	Dimensions				Mass[1]	Designations	
			dynamic[2]	static[3]							Bearing with stainless steel balls	glass balls
d	D	H	C	C_0		d_1	D_1	r_1 min.	r_3 min.			
mm			kN		r/min	mm				g	–	
10	24	9	0,25	0,2	600	23	11	0,2	0,5	5,2	**51100 V/HR11T1**	**51100 V/HR11Q1**
	24	9	0,22	0,175	550	23	11	0,2	0,5	4	**51100 V/HR22T2**	**51100 V/HR22Q2**
	26	11	0,26	0,21	600	25	11	0,2	0,5	7,9	**51200 V/HR11T1**	**51200 V/HR11Q1**
	26	11	0,23	0,185	550	25	11	0,2	0,5	6	**51200 V/HR22T2**	**51200 V/HR22Q2**
12	26	9	0,4	0,32	540	25	13	0,5	0,5	5,6	**51101 V/HR11T1**	**51101 V/HR11Q1**
	26	9	0,35	0,28	500	25	13	0,5	0,5	4,3	**51101 V/HR22T2**	**51101 V/HR22Q2**
	28	11	0,41	0,33	540	27	13	0,2	0,5	9,5	**51201 V/HR11T1**	**51201 V/HR11Q1**
	28	11	0,36	0,29	500	27	13	0,2	0,5	6,7	**51201 V/HR22T2**	**51201 V/HR22Q2**
15	28	9	0,625	0,5	500	27	16	0,2	0,5	6,1	**51102 V/HR11T1**	**51102 V/HR11Q1**
	28	9	0,55	0,44	460	27	16	0,2	0,5	4,7	**51102 V/HR22T2**	**51102 V/HR22Q2**
	32	12	0,65	0,52	500	31	16	0,2	0,5	11,5	**51202 V/HR11T1**	**51202 V/HR11Q1**
	32	12	0,57	0,46	460	31	16	0,2	0,5	8,8	**51202 V/HR22T2**	**51202 V/HR22Q2**
17	30	9	0,71	0,57	480	29	18	0,2	0,5	6,8	**51103 V/HR11T1**	**51103 V/HR11Q1**
	30	9	0,625	0,5	440	29	18	0,2	0,5	5,4	**51103 V/HR22T2**	**51103 V/HR22Q2**
	35	12	0,75	0,6	480	34	18	0,5	0,5	15	**51203 V/HR11T1**	**51203 V/HR11Q1**
	35	12	0,66	0,53	440	34	18	0,5	0,5	12	**51203 V/HR22T2**	**51203 V/HR22Q2**
20	35	10	0,81	0,65	460	34	21	0,4	0,5	10,5	**51104 V/HR11T1**	**51104 V/HR11Q1**
	35	10	0,71	0,57	420	34	21	0,4	0,5	8,1	**51104 V/HR22T2**	**51104 V/HR22Q2**
	40	14	0,86	0,69	460	39	21	0,5	0,5	20,5	**51204 V/HR11T1**	**51204 V/HR11Q1**
	40	14	0,75	0,6	420	39	21	0,5	0,5	16	**51204 V/HR22T2**	**51204 V/HR22Q2**
25	42	11	0,88	0,71	410	41	26	0,5	0,5	14,5	**51105 V/HR11T1**	**51105 V/HR11Q1**
	42	11	0,77	0,625	375	41	26	0,5	0,5	7,9	**51105 V/HR22T2**	**51105 V/HR22Q2**
	47	15	0,93	0,75	400	46	26	0,5	0,5	28,5	**51205 V/HR11T1**	**51205 V/HR11Q1**
	47	15	0,815	0,66	370	46	26	0,5	0,5	22	**51205 V/HR22T2**	**51205 V/HR22Q2**
	52	18	1,025	0,82	380	51	26	1	1	46	**51305 V/HR11T1**	**51305 V/HR11Q1**
	52	18	0,9	0,72	350	51	26	1	1	35,5	**51305 V/HR22T2**	**51305 V/HR22Q2**

[1] Valid for bearings with stainless steel balls.
[2] Above 50 °C *(120 °F)* and/or above 20% of limiting speed consider reduction according to **diagram 1** (→ **page 1256**).
[3] Above 50 °C *(120°F)* consider reduction according to **diagram 1** (→ **page 1256**).

Principal dimensions			Basic load ratings		Limiting speed	Dimensions				Mass[1]	Designations Bearing with	
			dynamic[2]	static[3]							stainless steel balls	glass balls
d	D	H	C	C_0		d_1	D_1	r_1 min.	r_3 min.			
mm			kN		r/min	mm				g	–	
30	47	11	0,95	0,76	400	46	31	0,5	1	17,5	**51106 V/HR11T1**	**51106 V/HR11Q1**
	47	11	0,835	0,67	370	46	31	0,5	1	13	**51106 V/HR22T2**	**51106 V/HR22Q2**
	52	16	1,025	0,82	375	51	31	1	1	34	**51206 V/HR11T1**	**51206 V/HR11Q1**
	52	16	0,9	0,72	345	51	31	1	1	25,5	**51206 V/HR22T2**	**51206 V/HR22Q2**
	60	21	1,07	0,86	360	59	31	1	1	63	**51306 V/HR11T1**	**51306 V/HR11Q1**
	60	21	0,94	0,755	330	59	31	1	1	47	**51306 V/HR22T2**	**51306 V/HR22Q2**
35	52	12	1,01	0,81	390	51	36	0,5	1	21	**51107 V/HR11T1**	**51107 V/HR11Q1**
	52	12	0,885	0,71	360	51	36	0,5	1	15,5	**51107 V/HR22T2**	**51107 V/HR22Q2**
	62	18	1,09	0,87	365	61	36	1	1	57	**51207 V/HR11T1**	**51207 V/HR11Q1**
	62	18	0,96	0,765	335	61	36	1	1	43,5	**51207 V/HR22T2**	**51207 V/HR22Q2**
40	60	13	1,11	0,89	375	59	41	0,5	1	29,5	**51108 V/HR11T1**	**51108 V/HR11Q1**
	60	13	0,975	0,78	345	59	41	0,5	1	22,5	**51108 V/HR22T2**	**51108 V/HR22Q2**
45	65	14	1,185	0,95	360	64	46	1	1	39	**51109 V/HR11T1**	**51109 V/HR11Q1**
	65	14	1,04	0,835	330	64	46	1	1	27,5	**51109 V/HR22T2**	**51109 V/HR22Q2**

[1] Valid for bearings with stainless steel balls.
[2] Above 50 °C *(120 °F)* and/or above 20% of limiting speed consider reduction according to **diagram 1** (→ **page 1256**).
[3] Above 50 °C *(120 °F)* consider reduction according to **diagram 1** (→ **page 1256**).