CINGHIE TRAPEZOIDALI A SEZIONE “STRETTA” DENTELLATE
RAW EDGE V-BELTS

Introduzione - Introduction


Le cinghie trapezoidali a sezione stretta, dentellate a fianchi tagliati, sono il risultato dell’applicazione di nuove tecnologie costruttive che garantiscono una qualità elevata ed una maggior durata. Rispetto alle cinghie a sezione stretta e fianchi ricoperti, permettono di ridurre di un 30% il numero delle gole e delle cinghie impiegate. Grazie alla dentellatura, questa cinghia può avvolgersi su diametri inferiori rispetto a quelli con sezione classica, permettendo quindi di sviluppare trasmissioni più compatte e raggiungere rapporti di trasmissione più elevate.


The narrow section V-belts, toothed side cut, are the result of new construction technologies that ensure high quality and longer life. Compared to the belts with narrow section and sides covered, they allow to reduce by 30% the number of gorges and belts used. Thanks to the dentation, this belt can wrap on smaller diameters than those with classical section, allowing to developing more compact transmissions and to reach higher gear ratios.

Descrizione e caratteristiche - Description and features

- **Le cinghie a sezione stretta sono costruite secondo le norme ISO 4184 / DIN 7753**
- **Armatura di cavi in poliestere rinforzato ad allungamento ridotto**
- **Fianchi rettificati per una maggior precisione di funzionamento**
- **Resistenza agli oli minerali ed ai climi tropicali**
- **Buona elettroconducibilità che permette di evitare normali pericoli elettrostatici**
- **Temperatura d’esercizio da –25° a +80°**


- The Narrow section belts are made according to ISO 4184 / DIN 7753
- Reinforced polyester cables with reduced elongation
- Hips grinded for greater accuracy of operation
- Resistance to mineral oils and tropical climates
- Good electro-conductivity which avoids normal electrostatic hazards
- Operating temperature from -25° to +80°

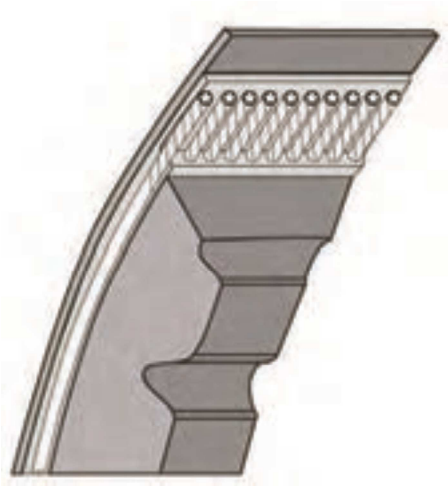

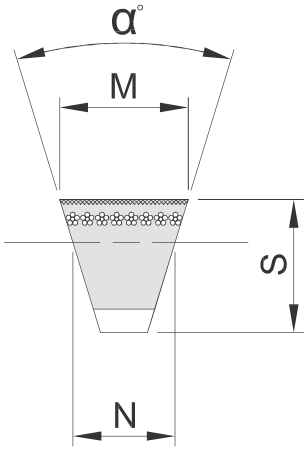

Dimensioni cinghia Dimensions of V-belt				
codice	α gradi	M mm	S mm	N mm
XPZ (mm)	38°	9,7	8	8,5
XPA (mm)	38°	12,7	10	11,0
XPB (mm)	38°	16,3	13	14,0
XPC (mm)	38°	22,0	18	19,0

CINGHIE TRAPEZOIDALI A SEZIONE “STRETTA” DENTELLATE
RAW EDGE V-BELTS






XPZ

descrizione	codice	sviluppo mm	Kg.
XPZ 587	XPZ00587	587	0,04
XPZ 607	XPZ00607	607	0,04
XPZ 612	XPZ00612	612	0,04
XPZ 630	XPZ00630	630	0,04
XPZ 637	XPZ00637	637	0,04
XPZ 662	XPZ00662	662	0,04
XPZ 670	XPZ00670	670	0,04
XPZ 687	XPZ00687	687	0,04
XPZ 710	XPZ00710	710	0,04
XPZ 722	XPZ00722	722	0,04
XPZ 737	XPZ00737	737	0,05
XPZ 750	XPZ00750	750	0,05
XPZ 762	XPZ00762	762	0,05
XPZ 775	XPZ00775	775	0,05
XPZ 787	XPZ00787	787	0,05
XPZ 800	XPZ00800	800	0,05
XPZ 812	XPZ00812	812	0,05
XPZ 837	XPZ00837	837	0,05
XPZ 850	XPZ00850	850	0,05
XPZ 862	XPZ00862	862	0,05
XPZ 875	XPZ00875	875	0,05
XPZ 887	XPZ00887	887	0,05
XPZ 900	XPZ00900	900	0,06
XPZ 912	XPZ00912	912	0,06
XPZ 925	XPZ00925	925	0,06
XPZ 937	XPZ00937	937	0,06
XPZ 950	XPZ00950	950	0,06
XPZ 960	XPZ00960	960	0,06
XPZ 962	XPZ00962	962	0,06
XPZ 987	XPZ00987	987	0,06
XPZ 1000	XPZ01000	1000	0,06
XPZ 1012	XPZ01012	1012	0,06
XPZ 1024	XPZ01024	1024	0,06
XPZ 1037	XPZ01037	1037	0,06
XPZ 1047	XPZ01047	1047	0,06
XPZ 1060	XPZ01060	1060	0,06
XPZ 1062	XPZ01062	1062	0,07
XPZ 1077	XPZ01077	1077	0,07
XPZ 1087	XPZ01087	1087	0,07
XPZ 1112	XPZ01112	1112	0,07
XPZ 1120	XPZ01120	1120	0,07
XPZ 1137	XPZ01137	1137	0,07
XPZ 1140	XPZ01140	1140	0,07
XPZ 1147	XPZ01147	1147	0,07
XPZ 1162	XPZ01162	1162	0,07
XPZ 1180	XPZ01180	1180	0,07
XPZ 1187	XPZ01187	1187	0,07
XPZ 1202	XPZ01202	1202	0,07
XPZ 1212	XPZ01212	1212	0,07
XPZ 1237	XPZ01237	1237	0,08
XPZ 1250	XPZ01250	1250	0,08
XPZ 1262	XPZ01262	1262	0,08
XPZ 1270	XPZ01270	1270	0,08
XPZ 1287	XPZ01287	1287	0,08
XPZ 1312	XPZ01312	1312	0,08
XPZ 1320	XPZ01320	1320	0,08
XPZ 1337	XPZ01337	1337	0,08
XPZ 1340	XPZ01340	1340	0,08
XPZ 1362	XPZ01362	1362	0,08
XPZ 1387	XPZ01387	1387	0,08
XPZ 1400	XPZ01400	1400	0,09

XPZ

descrizione	codice	sviluppo mm	Kg.
XPZ 1412	XPZ01412	1412	0,09
XPZ 1420	XPZ01420	1420	0,09
XPZ 1437	XPZ01437	1437	0,09
XPZ 1462	XPZ01462	1462	0,09
XPZ 1487	XPZ01487	1487	0,09
XPZ 1500	XPZ01500	1500	0,09
XPZ 1512	XPZ01512	1512	0,09
XPZ 1537	XPZ01537	1537	0,09
XPZ 1562	XPZ01562	1562	0,10
XPZ 1587	XPZ01587	1587	0,10
XPZ 1600	XPZ01600	1600	0,10
XPZ 1612	XPZ01612	1612	0,10
XPZ 1637	XPZ01637	1637	0,10
XPZ 1662	XPZ01662	1662	0,10
XPZ 1687	XPZ01687	1687	0,10
XPZ 1700	XPA01700	1700	0,10
XPZ 1737	XPZ01737	1737	0,11
XPZ 1762	XPZ01762	1762	0,11
XPZ 1787	XPZ01787	1787	0,11
XPZ 1800	XPZ01800	1800	0,11
XPZ 1812	XPZ01812	1812	0,11
XPZ 1850	XPZ01850	1850	0,11
XPZ 1862	XPZ01862	1862	0,11
XPZ 1887	XPZ01887	1887	0,11
XPZ 1900	XPZ01900	1900	0,12
XPZ 1937	XPZ01937	1937	0,12
XPZ 1962	XPZ01962	1962	0,12
XPZ 1987	XPZ01987	1987	0,12
XPZ 2000	XPZ02000	2000	0,12
XPZ 2019	XPZ02019	2019	0,12
XPZ 2037	XPZ02037	2037	0,12
XPZ 2120	XPZ02120	2120	0,13
XPZ 2187	XPZ02187	2187	0,13
XPZ 2240	XPZ02240	2240	0,14
XPZ 2280	XPZ02280	2280	0,14
XPZ 2360	XPZ02360	2360	0,14
XPZ 2500	XPZ02500	2500	0,15

CINGHIE TRAPEZOIDALI A SEZIONE “STRETTA” DENTELLATE
RAW EDGE V-BELTS






XPA

descrizione	codice	sviluppo mm	Kg.
XPA 612	XPA00612	612	0,07
XPA 710	XPA00710	710	0,08
XPA 732	XPA00732	732	0,08
XPA 757	XPA00757	757	0,09
XPA 782	XPA00782	782	0,09
XPA 800	XPA00800	800	0,09
XPA 807	XPA00807	807	0,09
XPA 812	XPA00812	812	0,09
XPA 832	XPA00832	832	0,09
XPA 850	XPA00850	850	0,10
XPA 857	XPA00857	857	0,10
XPA 875	XPA00875	875	0,10
XPA 882	XPA00882	882	0,10
XPA 900	XPA00900	900	0,10
XPA 907	XPA00907	907	0,10
XPA 925	XPA00925	925	0,10
XPA 932	XPA00932	932	0,10
XPA 950	XPA00950	950	0,11
XPA 957	XPA00957	957	0,11
XPA 982	XPA00982	982	0,11
XPA 1000	XPA01000	1000	0,11
XPA 1007	XPA01007	1007	0,11
XPA 1012	XPA01012	1012	0,11
XPA 1032	XPA01032	1032	0,12
XPA 1048	XPA01048	1048	0,12
XPA 1060	XPA01060	1060	0,12
XPA 1082	XPA01082	1082	0,12
XPA 1107	XPA01107	1107	0,12
XPA 1120	XPA01120	1120	0,13
XPA 1132	XPA01132	1132	0,13
XPA 1150	XPA01150	1150	0,13
XPA 1157	XPA01157	1157	0,13
XPA 1180	XPA01180	1180	0,13
XPA 1207	XPA01207	1207	0,13
XPA 1232	XPA01232	1232	0,14
XPA 1250	XPA01250	1250	0,14
XPA 1257	XPA01257	1257	0,14
XPA 1282	XPA01282	1282	0,14
XPA 1307	XPA01307	1307	0,15
XPA 1320	XPA01320	1320	0,15
XPA 1332	XPA01332	1332	0,15
XPA 1357	XPA01357	1357	0,15
XPA 1382	XPA01382	1382	0,15
XPA 1400	XPA01400	1400	0,16
XPA 1407	XPA01407	1407	0,16
XPA 1432	XPA01432	1432	0,16
XPA 1450	XPA01450	1450	0,16
XPA 1457	XPA01457	1457	0,16
XPA 1482	XPA01482	1482	0,16
XPA 1500	XPA01500	1500	0,17
XPA 1507	XPA01507	1507	0,17
XPA 1532	XPA01532	1532	0,17
XPA 1550	XPA01550	1550	0,17
XPA 1557	XPA01557	1557	0,17
XPA 1582	XPA01582	1582	0,18
XPA 1600	XPA01600	1600	0,18
XPA 1607	XPA01607	1607	0,18
XPA 1632	XPA01632	1632	0,18
XPA 1682	XPA01682	1682	0,19
XPA 1700	XPA01700	1700	0,19
XPA 1707	XPA01707	1707	0,19
XPA 1732	XPA01732	1732	0,19
XPA 1757	XPA01757	1757	0,20
XPA 1782	XPA01782	1782	0,20


XPA

descrizione	codice	sviluppo mm	Kg.
XPA 1800	XPA01800	1800	0,20
XPA 1807	XPA01807	1807	0,20
XPA 1832	XPA01832	1832	0,20
XPA 1857	XPA01857	1857	0,21
XPA 1882	XPA01882	1882	0,21
XPA 1900	XPA01900	1900	0,21
XPA 1907	XPA01907	1907	0,21
XPA 1932	XPA01932	1932	0,21
XPA 1957	XPA01957	1957	0,22
XPA 1982	XPA01982	1982	0,22
XPA 2000	XPA02000	2000	0,22
XPA 2032	XPA02032	2032	0,23
XPA 2057	XPA02057	2057	0,23
XPA 2082	XPA02082	2082	0,23
XPA 2120	XPA02120	2120	0,24
XPA 2240	XPA02240	2240	0,25
XPA 2282	XPA02282	2282	0,25
XPA 2293	XPA02293	2293	0,25
XPA 2300	XPA02300	2300	0,25
XPA 2307	XPA02307	2307	0,26
XPA 2360	XPA02360	2360	0,26
XPA 2432	XPA02432	2432	0,27
XPA 2482	XPA02482	2482	0,27
XPA 2500	XPA02500	2500	0,28
XPA 2580	XPA02580	2580	0,29
XPA 2650	XPA02650	2650	0,29
XPA 2682	XPA02682	2682	0,30
XPA 2720	XPA02720	2720	0,30
XPA 2800	XPA02800	2800	0,31
XPA 3000	XPA03000	3000	0,33
XPA 3150	XPA03150	3150	0,35
XPA 3350	XPA03350	3350	0,37
XPA 3550	XPA03550	3550	0,39
XPA 3750	XPA03750	3750	0,41
XPA 4000	XPA04000	4000	0,44
XPA 4250	XPA04250	4250	0,47
XPA 4500	XPA04500	4500	0,50

CINGHIE TRAPEZOIDALI A SEZIONE “STRETTA” DENTELLATE
RAW EDGE V-BELTS







XPB

descrizione	codice	sviluppo mm	Kg.
XPB 1250	XPB01250	1250	0,23
XPB 1260	XPB01260	1260	0,24
XPB 1270	XPB01270	1270	0,24
XPB 1320	XPB01320	1320	0,25
XPB 1340	XPB01340	1340	0,25
XPB 1350	XPB01350	1350	0,25
XPB 1360	XPB01360	1360	0,25
XPB 1400	XPB01400	1400	0,26
XPB 1450	XPB01450	1450	0,27
XPB 1470	XPB01470	1470	0,27
XPB 1500	XPB01500	1500	0,28
XPB 1514	XPB01514	1514	0,28
XPB 1550	XPB01550	1550	0,29
XPB 1600	XPB01600	1600	0,30
XPB 1650	XPB01650	1650	0,31
XPB 1690	XPB01690	1690	0,32
XPB 1700	XPB01700	1700	0,32
XPB 1750	XPB01750	1750	0,33
XPB 1800	XPB01800	1800	0,34
XPB 1900	XPB01900	1900	0,35
XPB 2000	XPB02000	2000	0,37
XPB 2060	XPB02060	2060	0,38
XPB 2120	XPB02120	2120	0,40
XPB 2240	XPB02240	2240	0,42
XPB 2280	XPB02280	2280	0,42
XPB 2360	XPB02360	2360	0,44
XPB 2400	XPB02400	2400	0,45
XPB 2500	XPB02500	2500	0,47
XPB 2530	XPB02530	2530	0,47
XPB 2580	XPB02580	2580	0,48
XPB 2650	XPB02650	2650	0,49
XPB 2680	XPB02680	2680	0,50
XPB 2710	XPB02710	2710	0,50
XPB 2730	XPB02730	2730	0,51
XPB 2800	XPB02800	2800	0,52
XPB 2840	XPB02840	2840	0,53
XPB 2900	XPB02900	2900	0,54
XPB 3000	XPB03000	3000	0,56
XPB 3150	XPB03150	3150	0,59
XPB 3350	XPB03350	3350	0,62
XPB 3550	XPB03550	3550	0,66
XPB 3750	XPB03750	3750	0,70
XPB 3800	XPB03800	3800	0,71
XPB 3825	XPB03825	3825	0,71
XPB 4050	XPB04050	4050	0,75
XPB 4250	XPB04250	4250	0,79
XPB 4300	XPB04300	4300	0,80
XPB 4550	XPB04550	4550	0,84

XPC

descrizione	codice	sviluppo mm	Kg.
XPC 2000	XPC02000	2000	0,66
XPC 2120	XPC02120	2120	0,70
XPC 2240	XPC02240	2240	0,74
XPC 2360	XPC02360	2360	0,78
XPC 2500	XPC02500	2500	0,83
XPC 2650	XPC02650	2650	0,88
XPC 2800	XPC02800	2800	0,93
XPC 3000	XPC03000	3000	0,99
XPC 3150	XPC03150	3150	1,04
XPC 3350	XPC03350	3350	1,11
XPC 3550	XPC03550	3550	1,18
XPC 3750	XPC03750	3750	1,24
XPC 4000	XPC04000	4000	1,32
XPC 4250	XPC04250	4250	1,41
XPC 4500	XPC04500	4500	1,49
XPC 5000	XPC05000	5000	1,65